





GEALLIS
lighting

Company Profile

GALLIS S.A is one of the leading manufacturers and distributors of decorative & architectural lighting in South East Europe. Established In 1987, Gallis S.A. solidified and continue advancing a successful lighting trade operation founded 40 years ago. With private owned premises, showrooms, manufacturing and warehouse facilities of over 11.000 m², Gallis SA can support any kind of domestic or international customer request, with minimum production and shipping time.


Staffed with highly motivated, trained and experienced personnel, GALLIS S.A. is placed among the largest and most reliable suppliers of international Retail-Chains, City and Resort Hotels, Commercial and Public buildings, Office spaces, as well as prominent Architectural and Engineering associations.

Our company has a significant Global presence, with a network in more than 30 countries and a constant participation in the most important international fairs such as Light and Building (Frankfurt), Big 5 (UAE) and others.

We are continuously upgrading our product line up and providing quality services and technical support to all our customers. Offering custom-made solutions to complex and demanding projects, we are committed in providing the best possible applications and illumination effects.

Product development is performed by a highly specialized team of engineers and designers, using sophisticated CAD programs, advanced production processes and techniques. Product and component testing processes are established and maintained according to ISO 9001:2000 standards and are implemented systematically in order to ensure the highest product quality, safety and customer satisfaction.



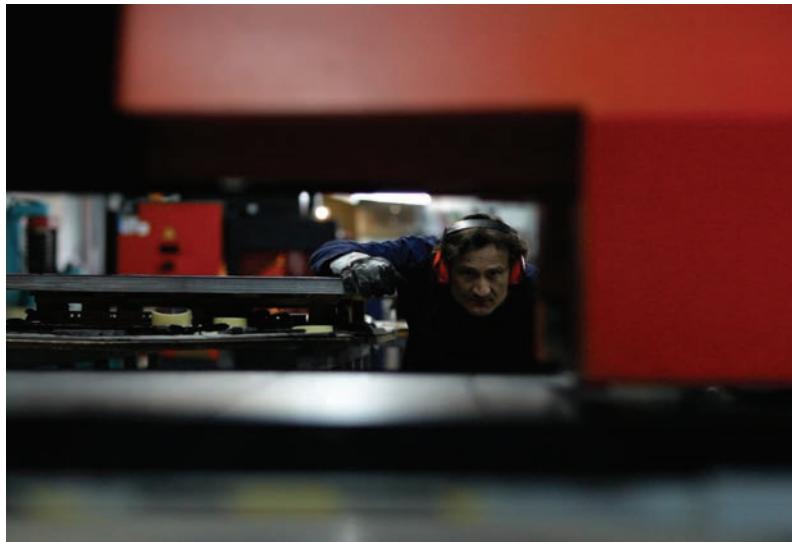

Company Profile

Our Products

We produce a wide range of luminaires addressing diverse design, technical, and lighting requirements for indoor and outdoor applications. Our key products include: surface mounted and suspended linear luminaires, wallwashers with asymmetrical beams, spotlights and floodlights, a variety of highly efficient downlights as well as flexible recessed system modules, ranging from louver luminaries to adjustable recessed spotlights.

Combination of aesthetics and quality, as well as the adherence to environmental and energy saving standards, are all elements of our design process.

In order to address the quality features related to visual performance, comfort and energy efficiency requirements, a great deal of emphasis is placed in selecting the appropriate component materials. Only top quality materials, from well known manufacturers are used, in the best possible combinations, to meet the highest product standards.

Our Guarantee

Quality of production and materials used, allows us to offer a 5 years guarantee to all our products for the luminaire body, driver & LED chip and in specific series 10 years in the luminaire body, where the anodization process fulfills the criteria of Seaside Class.

Minimum Luminaire life time > 50,000 hours at 70% luminous flux for all our products according to LM80 standard.

Going Green

Sustaining our environment is ensuring our future.

Simply it is no longer a desire but a necessity, and for this reason, sustainability, has become one of our core values.

Interested in actively taking a stance, and contributing our share, the "Gallis Green Initiative," was launched in 2008. It incorporated new and sustainable manufacturing methods, which significantly reduced the environmental footprint of our operations, as well as establishing a recycling protocol for reduced wastes from our factory. Since 2010 we have installed a solar plant of photovoltaic panels on the roof of our factory conserving energy and limiting our dependency on electrical power.

Firmly believing that change can occur with actions and not by default, we created a Green Team task force in our R&D department, solely devoted in researching, identifying and developing new ways to create energy-efficient luminaires.

Our current product line up is among the most eco-friendly lines we have ever manufactured, as a result of all these efforts.

Production Facility: Schimatari, Greece



GLOBAL NETWORK



Albania | Austria | Bahrain | Belgium | Bulgaria | Croatia | Cyprus | Denmark
Egypt | France | Greece | India | Ireland | Italy | Jordan | Kuwait | Lebanon
Netherlands | Palestine | Poland | Qatar | Romania | Russia | Saudi Arabia | Serbia
Spain | Turkey | United Arab Emirates | United Kingdom

Project Examples



Alila Hotel Rhodes , Greece



Stavros Niarchos Foundation , Greece



Sofia Ring Mall , Bulgaria



Festival City , Egypt

Symbols & Explanations



Luminaires have been designed and tested with regard to safety according to the European standard EN 60598-1 and comply with the EU - directives: LVD 73/23/EEC, EMC 89/336/EEC, CE 93/68/ EEC and bear the CE mark accordingly.



All products are subject to European Directive 2002/95/EC and 2002/96/ EC regarding hazardous substances In electrical and electronic equipment and recycling and waste management respectively.



Luminaires bearing this symbol are environmentally friendly, using the latest saving energy technology for improved efficiency.



Luminaires bearing this symbol can be mounted on normally flammable surfaces. Material having an ignition temperature of at least 200 °C and which will not deform or weaken at this temperature. Examples: Wood and materials based on wood of more than 2 mm thickness.

NOTE: The ignition temperature and the resistance of normally flammable materials to deformation or weakening are based on widely accepted values determined during a test period of 15 min.



Class I Luminaire. Functionally insulated luminaire with earthing facility marked with this symbol. The luminaire is designed for connection to a protective conductor. Unless specified otherwise, all luminaires by GALLIS comply at least with protection class I.



Class III Luminaire. Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.



Gallis SA is a proud member of FOTOKIKLOSI (n.00898) since the foundation of the organization, fully supporting the recycling of lamps and luminaires by introducing dedicated recycling bins throughout all the premises of the company.



Products with this symbol are fully compliant with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.



The company has been certified according to ISO 9001: 2000 /EN ISO 9001: 2000 for establishing and applying a quality management system for its design, development, production and distribution processes.



3 years warranty period as described in Gallis lighting warranty terms and conditions.



5 years warranty period as described in Gallis lighting warranty terms and conditions.



All products bearing this symbol undergo a special finishing process that renders them suitable for installation at a seaside environment, maintaining their warranty.



10 years warranty period for the luminaire body, as described in Gallis lighting warranty terms and conditions.

IP Ratings



FIRST DIGIT DEFINITION
PROTECTION AGAINST SOLID OBJECTS

| | | |
|------|--|--|
| IP20 | Protected against solid objects over 12mm (e.g. fingers). | No protection. |
| IP40 | Protected against solid objects over 1mm (e.g. tools, wires). | No protection. |
| IP44 | Protected against solid objects over 1mm (e.g. tools, wires). | Protected against sprays from all directions - limited ingress permitted. |
| IP54 | Protected against dust - limited ingress (no harmful deposit). | Protected against sprays from all directions - limited ingress permitted. |
| IP55 | Protected against dust - limited ingress (no harmful deposit). | Protected against low pressure jets of water from all directions - limited ingress permitted. |
| IP65 | Totally protected against dust. | Protected against low pressure jets of water from all directions - limited ingress permitted. |
| IP67 | Totally protected against dust. | Protected against the effects of temporary immersion between 15cm and 1m. Duration of test 30 minutes. |

SECOND DIGIT DEFINITION
PROTECTION AGAINST LIQUIDS

Colors



01 WHITE RAL 9016



03 BLACK RAL 9005



26 METALLIC GREY



28 DARK GREY



50 MATT CHROME



22 ANODIZED METAL



32 BRASS



37 COPPER

* Image Disclaimer: All pictures shown in this catalogue are for illustration purpose only. Actual product and colors may vary.

Index



OUTDOOR

PAGE
15



PG 16
FOREVER LED



PG 18
FOREVER LED



PG 20
FOREVER LED



PG 22
FOREVER
DOWNLIGHT



PG 23
FOREVER LED



PG 24
FOREVER LED



PG 26
FOREVER MID



PG 27
FOREVER MID
RECESSED




PG 28
FOREVER MID
AC



PG 29
FOREVER MAX
LED



PG 30
FOREVER MAX
LED



PG 31
FOREVER LED
UP/DOWN



PG 32
FOREVER
SURFACE



PG 33
FOREVER
SURFACE



PG 34
FOREVER LED
OUTDOOR PENDANT



PG 35
FOREVER LED
CEILING



PG 36
FOREVER BOLLARD



PG 37
BOLLARD THIN




PG 38
SIRIUS LED
PENDANT



PG 39
SIRIUS



PG 40
LINEALUM



PG 42
CUBE LED



PG 43
MORFI



PG 44
CROOK LED



PG 46
FOLIE



PG 47
MULTI PROJECTOR




PG 48
ATLANTIS LED




PG 50
7030



PG 50
7031



PG 50
7141



PG 50
7142



PG 51
7143



PG 51
B1013C



PG 51
WL452



PG 51
B2000A-2



LED LINEAR

PAGE
53



PG 54
ENA LED



PG 55
E-FREE LED



PG 56
WOOD E-FREE LED



PG 57
WOOD SEVIL



PG 58
COLLECT



PG 60
MULTILINE LED



PG 61
ASTROLINE LED



PG 62
TRIGONO



PG 63
PC LED TUBE



PG 64
IOLI 2 LED
SURFACE



PG 65
IOLI 2
RECESSED



PG 66
KANALI 40
DEEP
STARLIGHT



PG 67
KANALI 70
LINEAR LED



PG 68
KANALI 50
FRAMELESS
LED



PG 69
KANALI 70
FRAMELESS
LED

Index

RECESSED DOWNLIGHTS

PAGE
71



PG 72
STARLIGHT



PG 73
STARLIGHT DEEP,
DARK, DECO



PG 74
STARLIGHT
SEMI-RECESSED



PG 75
STARLIGHT LINEAR



PG 76
MINI GNOMON



PG 77
GNOMON



PG 78
VIRGO ROUND



PG 79
VIRGO SQUARE



PG 80
MINI VIRGO



PG 81
EASY



PG 82
PIN HOLE
ROUND/SQUARE



PG 83
CARRE



PG 84
LEO ROUND



PG 85
LEO SQUARE



PG 86
VIRGIN DARK



PG 87
VIRGIN ADJUSTABLE



PG 88
VIRGIN ADJUSTABLE
DOULE



PG 89
VIRGIN ADJUSTABLE
TRIPLE



PG 90
ASTERION LED



PG 91
ASTERION DOUBLE
LED



PG 92
MINI ASTERION LED



PG 93
MINI ASTERION
DOUBLE LED



PG 95
VIVO ADJUSTABLE



PG 96
THOLOS LED



PG 97
THOLOS LED SQ



PG 98
FAROS



PG 99
MIDI FAROS



PG 100
MINI FAROS



PG 101
MORFEAS LED



PG 102
TRIMLESS DOWNLIGHT



PG 103
TRIMLESS ADJUSTABLE



PG 104
PL-6060-BACKLIT
PANEL



PG 105
POINT



PG 106
VIRGO ROUND GU10



PG 107
2005



PG 107
2006



PG 108
CERAMIX

TRACKS & WALL LIGHT

PAGE
111



PG 112
PICTOR LED



PG 113
PRINOS LED



PG 114
CYLINDER 7-A3
MONO



PG 115
CYLINDER 7-A3
DOUBLE



PG 116
CYLINDER 7-A3
ONE TUBE



PG 118
CYLINDER 12 TRACK



PG 119
POLYSPOT



PG 120
MAURO



PG 122
STARLIGHT SURFACE

Index

CEILING & SUSPENDED

PAGE
125



PG 126
ASTERION DOUBLE
LED



PG 127
MINI ASTERION
DOUBLE LED



PG 128
ORION LED



PG 129
JESOLO LED



PG 130
THOLOS CEILING



PG 131
RODE



PG 133
STARLIGHT PENDANT



PG 134
STICK



PG 135
CYLINDER 7C / 7S



PG 136
CYLINDER ASTERION
LED



PG 137
THOLOS HIGH BAY LED



PG 138
CYLINDER 7C & 7S



PG 139
CYLINDER 12C / 16C




PG 140
TETRAGON 7C / 7S

LED TAPE

PAGE
143



PG 144
LED TAPE




PG 145
MICROLINE


FLUORESCENT & METAL HALIDE

PAGE
147

ACCESSORIES

PAGE
149

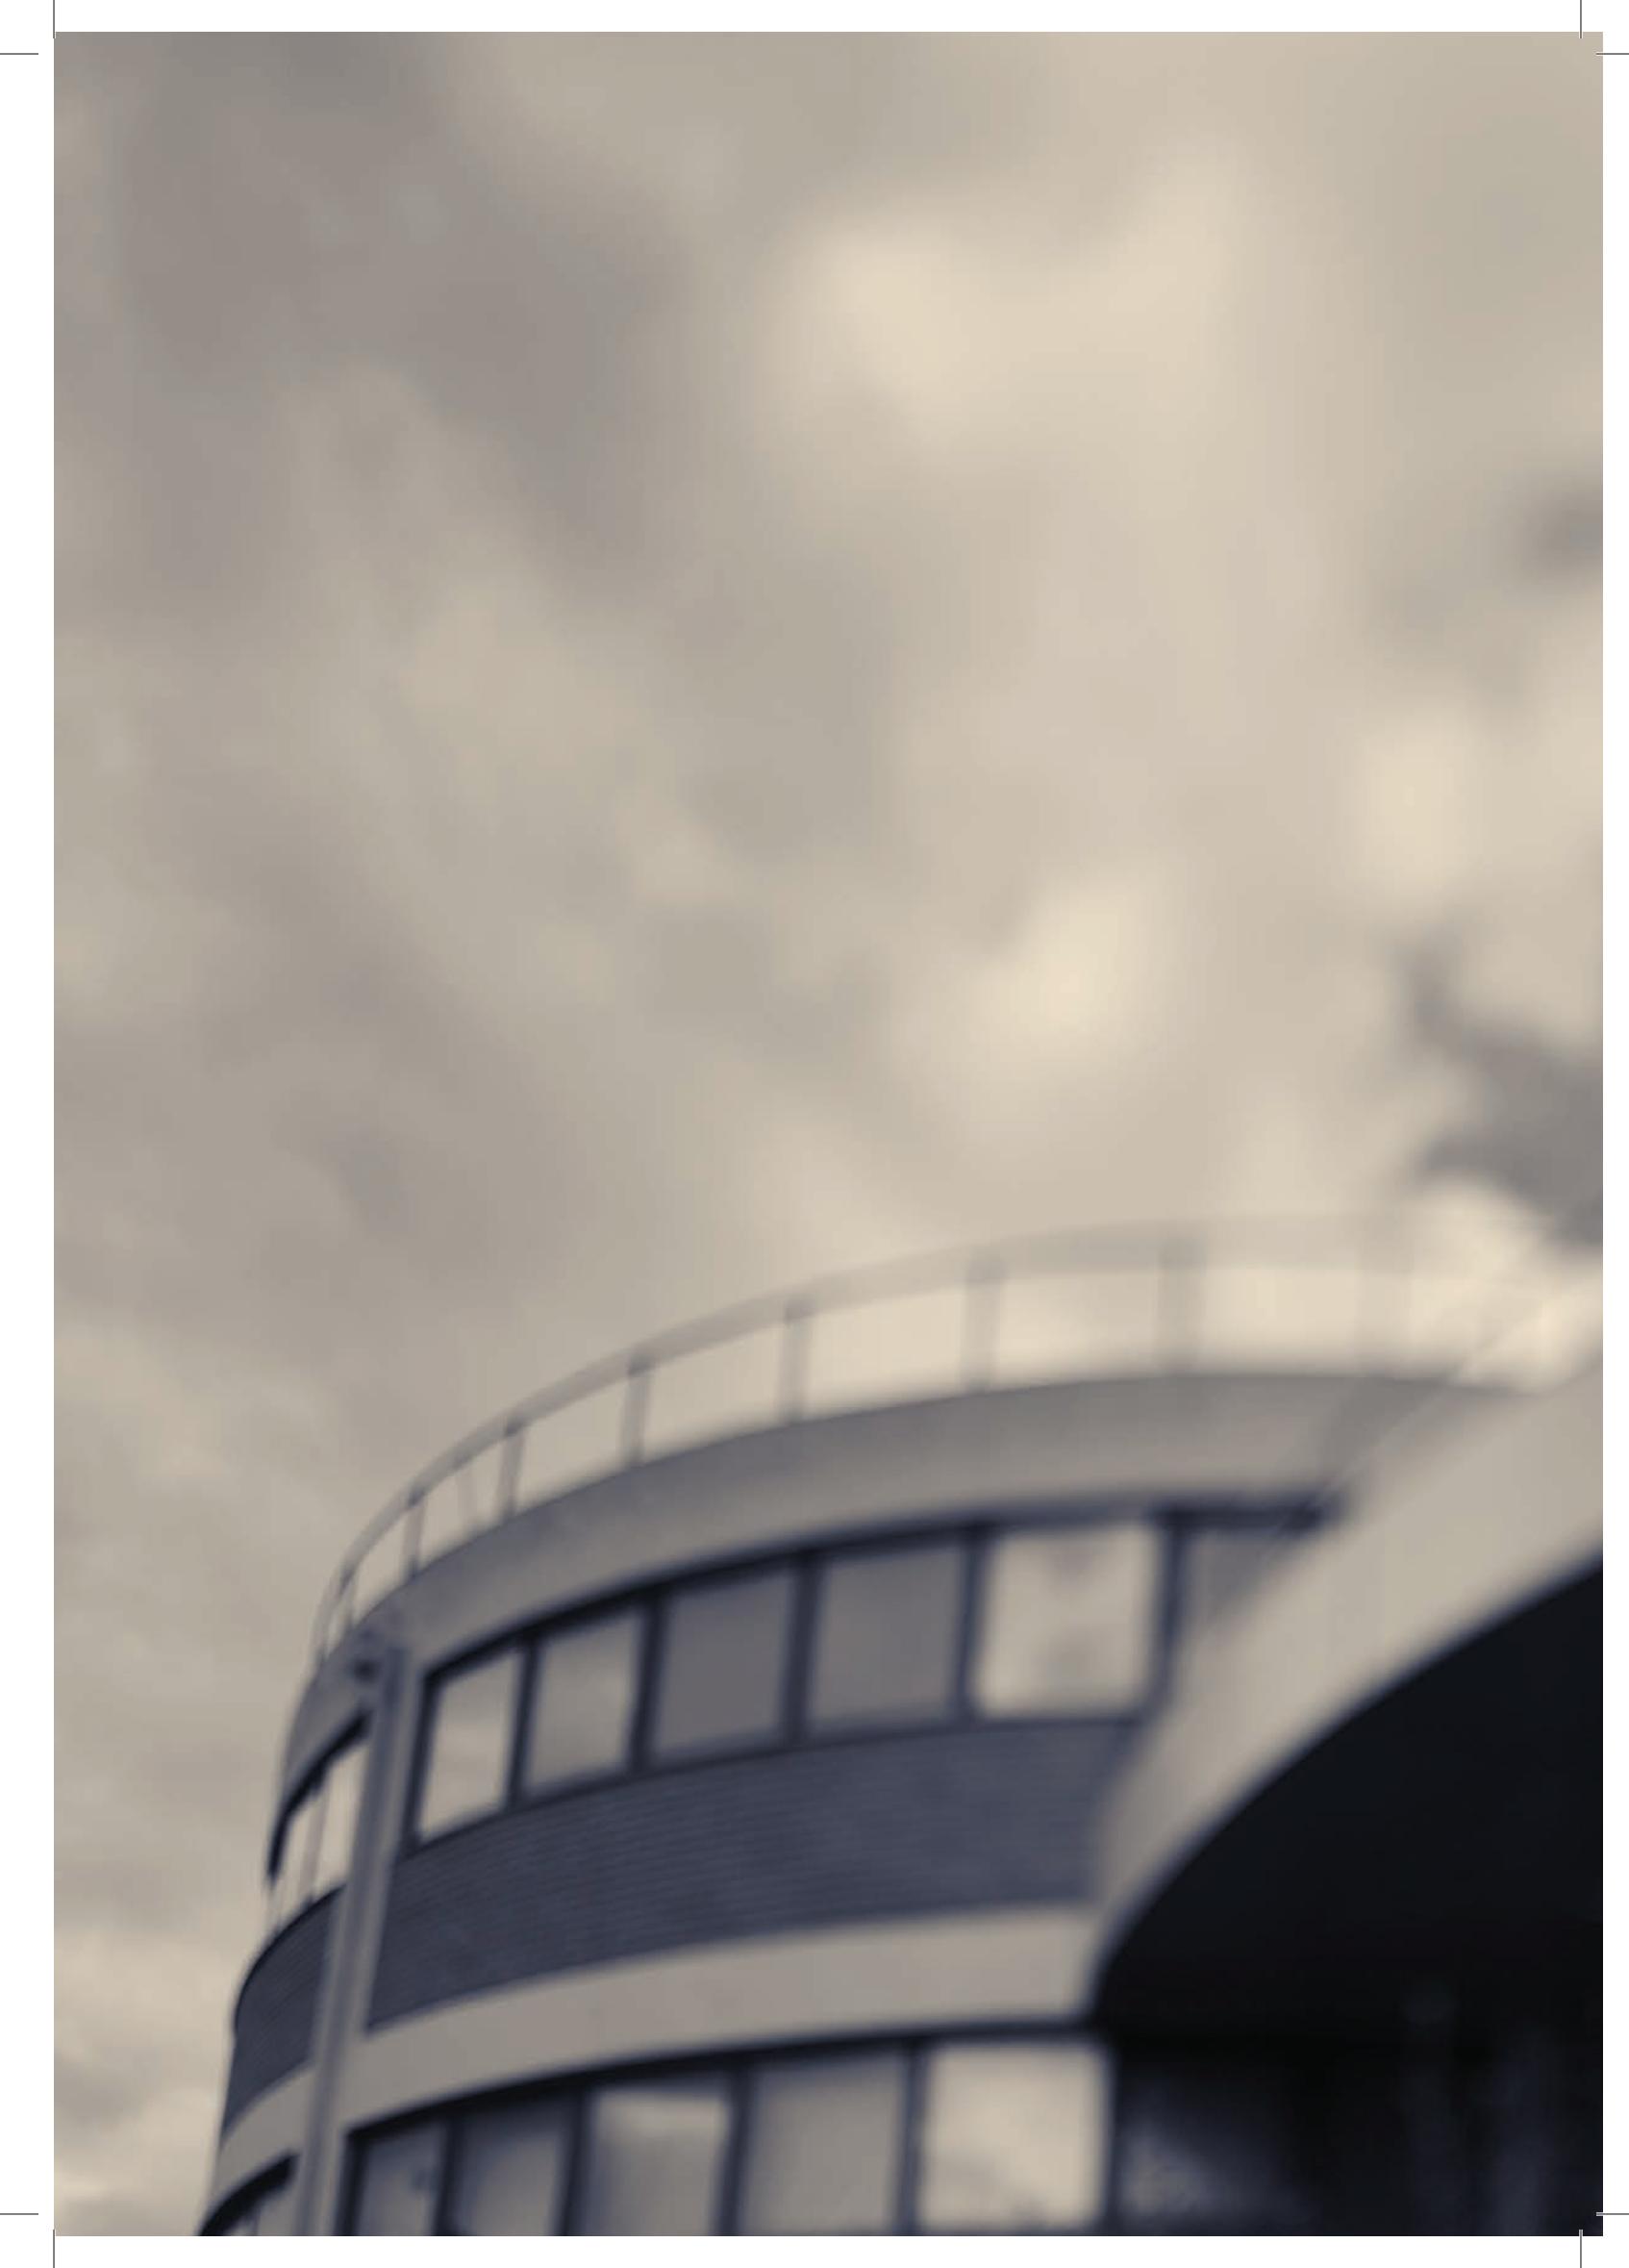

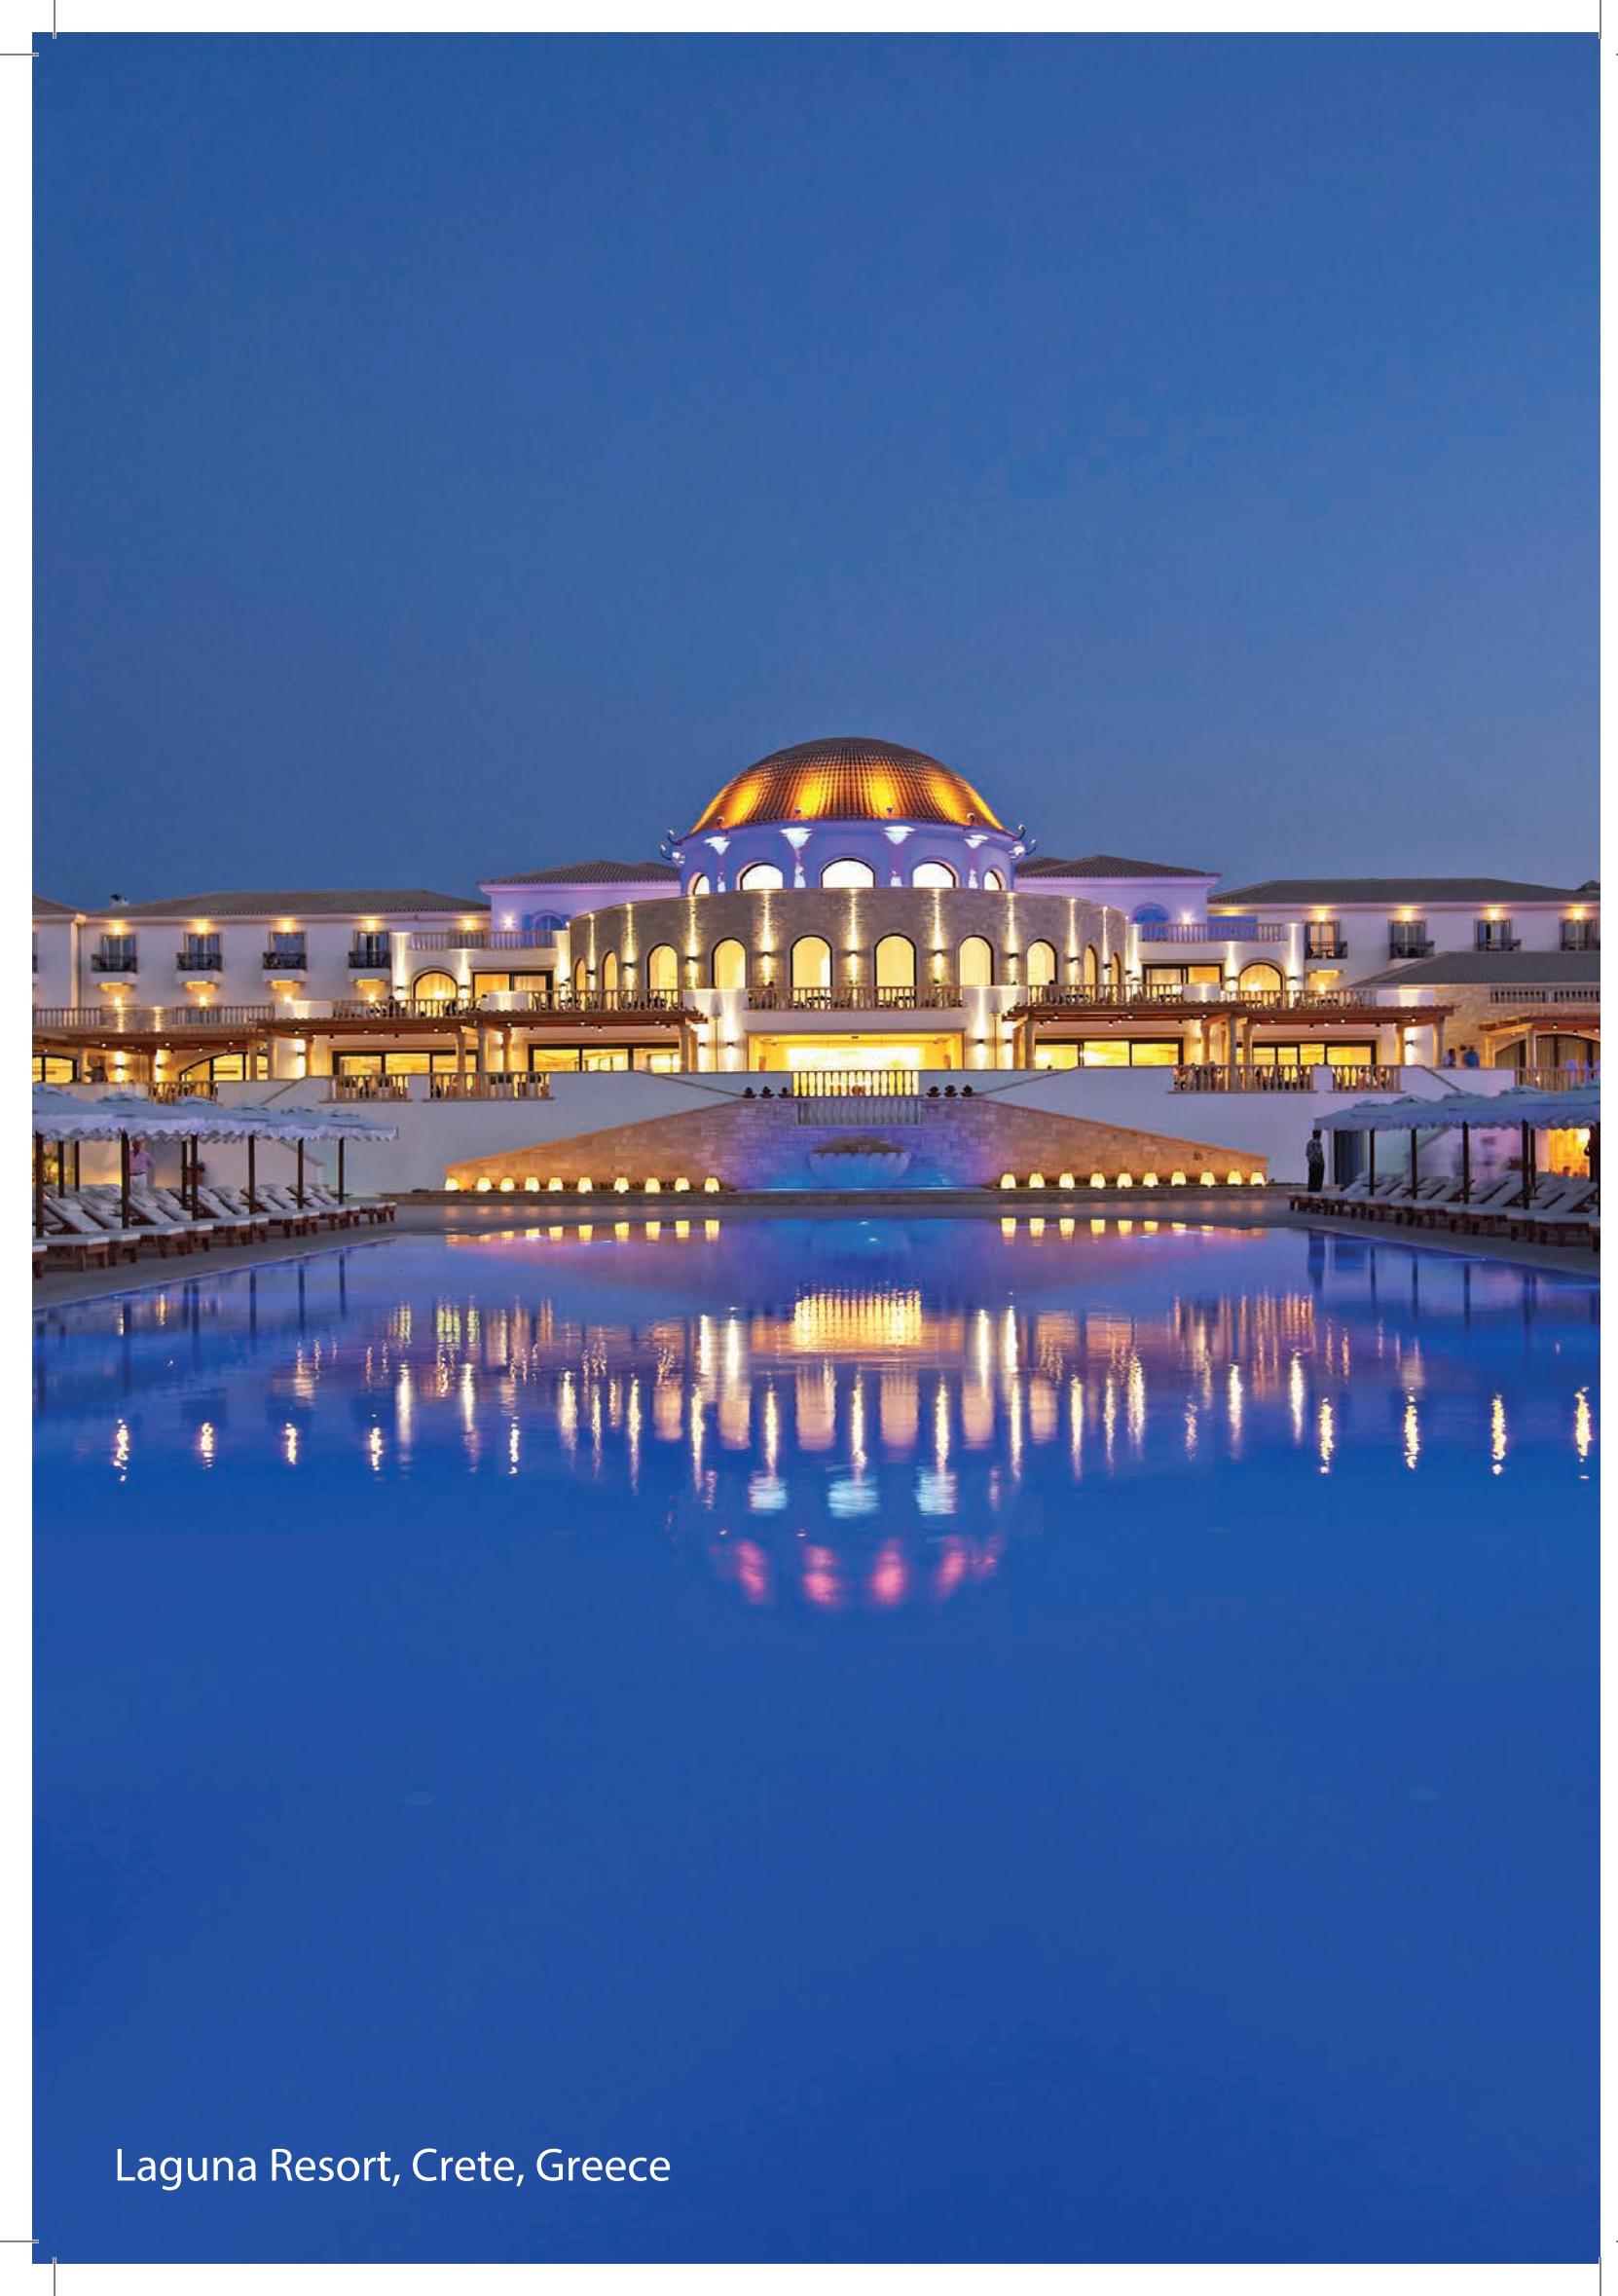

Laguna Resort, Crete, Greece



Outdoor

pages 16 - 51

01



Forever LED

22
32
03


- Indoor and outdoor waterproof ground recessed LED series.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBC). 2700K-3000K-4000K.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Included installation tube.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Multiple spots can be operated through one CC driver in serial connection.
- Input 350, 500, 700mA.
- Dimmable.
- HCB version is equipped with honeycomb filter. Height is 10mm longer.
- LED driver to ordered separately.

| CODE | 1151AL/BR | 1151HCB AL/BR |
|----------------------|------------------------------|------------------------------|
| Input (mA) | 350 / 500 / 700 DC | 350 / 500 / 700 DC |
| Source Power (W) | 1,05 / 1,5 / 2,1 | 1,05 / 1,5 / 2,1 |
| Lumen Source (lm) | 140 / 200 / 280 | 140 / 200 / 280 |
| Lumen Luminaire (lm) | 112 / 162 / 224 | 112 / 162 / 224 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | D50xH70 | D50xH80 |
| Weight (Kg) | 0,32 | 0,32 |

CODE ACCESSORIES

| | | | | |
|--------|--------------------------------|--------|------|-------|
| Filter | Red | Yellow | Blue | Green |
| CO.001 | IP68 Connection, 2 poles | | | |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter | | | |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

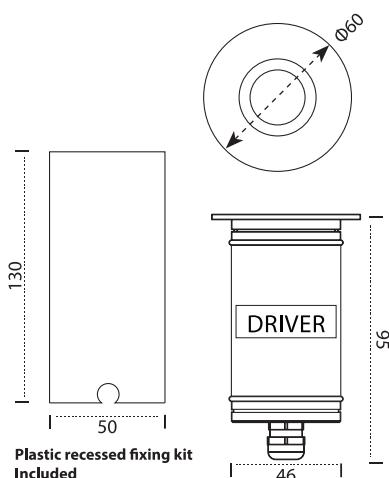

Forever LED

22 32 03

- Indoor and outdoor waterproof ground recessed LED series.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBC). 2700K-3000K-4000K.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Included installation tube.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @350mA or 700mA.
- Non dimmable.
- HCB version is equipped with honeycomb filter.

| CODE | 1141AL/BR | 1141HCB AL/BR |
|----------------------|------------------------------|------------------------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 1,05 |
| System Power (W) | 2,2 | 1,1 |
| Driven @ (mA) | 700 | 350 |
| Lumen Source (lm) | 280 | 140 |
| Lumen Luminaire (lm) | 224 | 112 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | D50xH130 | D50xH140 |
| Weight (kg) | 0,32 | 0,32 |

CODE ACCESSORIES

| | Red | Yellow | Blue | Green |
|--------|--------------------------------|--------|------|-------|
| CO.002 | IP68 Connection, 3 poles | | | |
| CO.004 | Cable Ho5RN-F 3G0,75 per meter | | | |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



1155AL

1155BR






1154AL

1154BR



1153AL

1153BR



Plastic recessed fixing kit
Included

Forever LED

22 32 03



- Indoor and outdoor waterproof ground recessed LED series.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBC). 2700K-3000K-4000K.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Included installation tube.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Multiple spots can be operated through one CC driver in serial connection.
- Input 350, 500, 700mA.
- Dimmable.
- LED driver to ordered separately.

| CODE | 1153AL | 1153BR | 1154AL | 1154BR | 1155AL | 1155BR |
|----------------------|---------|---------|---------|---------|---------|---------|
| Max Input (mA) | 700 DC |
| Source Power (W) | 2,1 | 2,1 | 2,1 | 2,1 | 2,1 | 2,1 |
| Lumen Source (lm) | 280 | 280 | 280 | 280 | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 | 224 | 224 | 224 | 224 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |
| Beams | 1 | 1 | 2 | 2 | 4 | 4 |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | D50xH70 | D50xH70 | D50xH70 | D50xH70 | D50xH70 | D50xH70 |
| Weight (kg) | 0,32 | 0,32 | 0,32 | 0,32 | 0,32 | 0,32 |

CODE ACCESSORIES

| | | | | |
|--------|--------------------------------|--------|------|-------|
| Filter | Red | Yellow | Blue | Green |
| CO.001 | IP68 Connection, 2 poles | | | |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter | | | |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

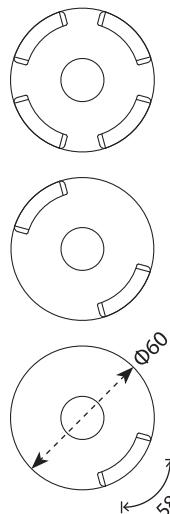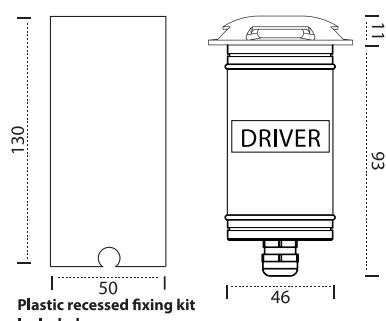

1145BR



1145AL



1144BR



1144AL



1143BR



1143AL

Forever LED

22 32 03






- Indoor and outdoor waterproof ground recessed LED series.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBC). 2700K-3000K-4000K.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Included installation tube.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @ 350, 700mA.
- Non dimmable.

| CODE | 1143AL | 1143BR | 1144AL | 1144BR | 1145AL | 1145BR |
|----------------------|----------|----------|----------|----------|----------|----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 2,1 | 2,1 | 2,1 | 2,1 | 2,1 |
| System Power (W) | 2,2 | 2,2 | 2,2 | 2,2 | 2,2 | 2,2 |
| Lumen Source (lm) | 280 | 280 | 280 | 280 | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 | 224 | 224 | 224 | 224 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |
| Beams | 1 | 1 | 2 | 2 | 4 | 4 |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | D50xH130 | D50xH130 | D50xH130 | D50xH130 | D50xH130 | D50xH130 |
| Weight (kg) | 0,32 | 0,32 | 0,32 | 0,32 | 0,32 | 0,32 |

CODE ACCESSORIES

| Filter | Red | Yellow | Blue | Green |
|--------|--------------------------------|--------|------|-------|
| CO.002 | IP68 Connection, 3 poles | | | |
| CO.004 | Cable Ho5RN-F 3G0,75 per meter | | | |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

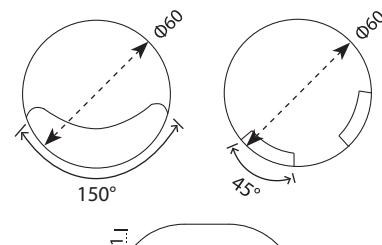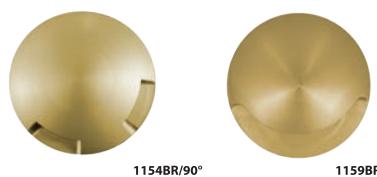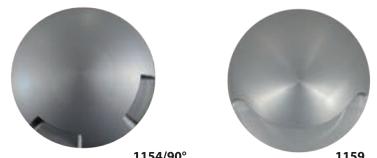

Plastic recessed fixing kit
Included

Forever LED

22 32 03


- Indoor and Outdoor waterproof wall recessed mounted LED luminaire.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium or painted finish.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPCB). 2700K-3000K-4000K.
- CRI 90 available upon request.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Included installation tube.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Multiple spots can be operated through one CC driver in serial connection.
- Input 350, 500, 700mA.
- Dimmable.
- LED driver to ordered separately.

| CODE | 1159 | 1159BR | 1154/90° | 1154BR/90° |
|----------------------|---------|---------|----------|------------|
| Max Input (mA) | 700 DC | 700 DC | 700 DC | 700 DC |
| Source Power (W) | 2,1 | 2,1 | 2,1 | 2,1 |
| Lumen Source (lm) | 280 | 280 | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 | 224 | 224 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 |
| Beams | 1 | 1 | 2 @ 90° | 2 @ 90° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | D50xH70 | D50xH70 | D50xH70 | D50xH70 |
| Weight (kg) | 0,32 | 0,32 | 0,32 | 0,32 |

CODE ACCESSORIES

- CO.001 IP68 Connection, 2 poles
CO.003 Cable Ho5RN-F 2X0,75 per meter

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

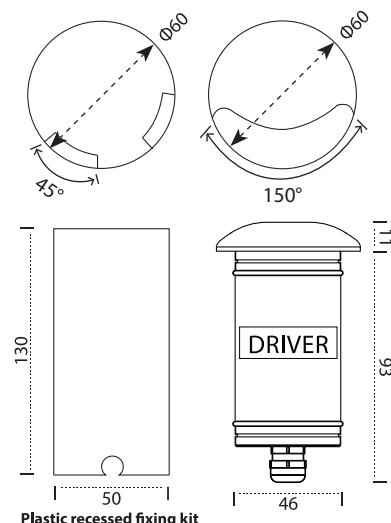

Forever LED

22 32 03

- Indoor and Outdoor waterproof wall recessed mounted LED luminaire.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium or painted finish.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPCB). 2700K-3000K-4000K.
- CRI 90 available upon request.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Included installation tube.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body. - Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @ 350, 700mA.
- Non dimmable.

| CODE | 1162 | 1162BR | 1144/90° | 1144BR/90° |
|----------------------|----------|----------|----------|------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 2,1 | 2,1 | 2,1 |
| System Power (W) | 2,2 | 2,2 | 2,2 | 2,2 |
| Lumen Source (lm) | 280 | 280 | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 | 224 | 224 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 |
| Beams | 1 | 1 | 2 @ 90° | 2 @ 90° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | D50xH130 | D50xH130 | D50xH130 | D50xH130 |
| Weight (Kg) | 0,32 | 0,32 | 0,32 | 0,32 |




CODE ACCESSORIES

| | |
|--------|--------------------------------|
| CO.002 | IP68 Connection, 3 poles |
| CO.004 | Cable Ho5RN-F 3G0,75 per meter |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

GALLIS
LIGHTING

www.gallis.gr



Forever Downlight

22


03

- Indoor and outdoor waterproof ceiling recessed LED downlight.
- Full luminaire made of machined aluminium to optimize heat dissipation.
- Clear protection plastic glass 6 mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBC) 2700K, 3000K and 4000K.
- European beam shaping lens.
- Anticorrosion capabilities through the anodization process implemented on the aluminium parts.
- Minimum thickness of the anodized layer is 20µm.
- For outdoor or corrosive environments (i.e. seaside or industrial spaces).
- 10 years warranty of the body. - Also available in electrostatic polyester powder coated version 10pm coating, for outdoor use, but not Seaside Class.
- Available filter colors: green, yellow, red.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.
- Multiple spots can be operated through one CC driver in serial connection.
- Dimmable.
- HCB versions are equipped with honeycomb filter.
- LED driver to be ordered separately.

| CODE | 1152 | 1152 SQ |
|----------------------|------------------------------|------------------------------|
| Max Input (mA) | 700 DC | 700 DC |
| Source Power (W) | 2,1 | 2,1 |
| Lumen Source (lm) | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 50 | 50 |
| Weight (Kg) | 0,15 | 0,15 |

CODE ACCESSORIES

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

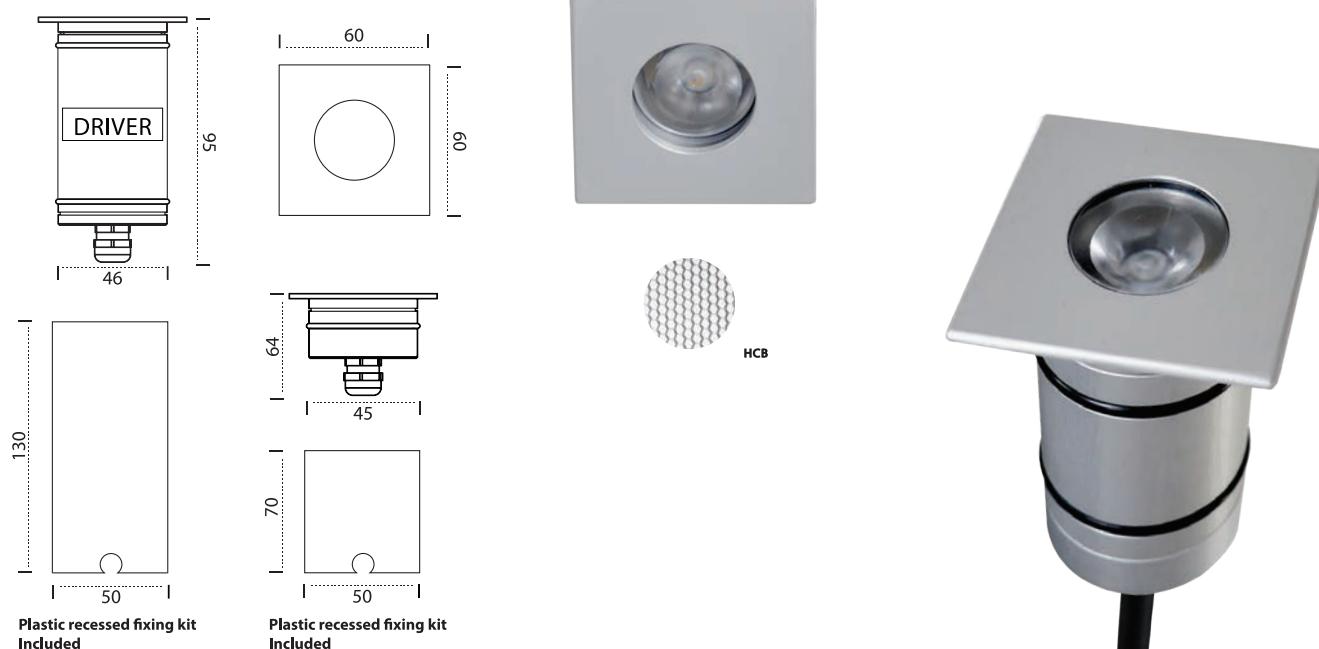

Forever LED

22 03

- Indoor and outdoor waterproof ground recessed LED series.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBC). 2700K-3000K-4000K.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Included installation tube.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Multiple spots can be operated through one CC driver in serial connection for code 1179.
- MAX Input 700mA for code 1179 / Available @350mA or 700mA for code 1149.
- Dimmable code 1179 (driver not included) / Non dimmable code 1149 (driver included).
- HCB versions are equipped with honeycomb filter.

| CODE | 1179 | 1149 | 1149 |
|----------------------|----------------------------|----------------------------|----------------------------|
| Max Input (mA) | 700 DC | | |
| Frequency (Hz) | | 50/60 | 50/60 |
| Main Voltage (V) | | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 2,1 | 1,05 |
| System Power (W) | | 2,2 | 1,1 |
| Driven @ (mA) | | 700 | 350 |
| Lumen Source (lm) | 280 | 280 | 140 |
| Lumen Luminaire (lm) | 224 | 224 | 112 |
| CCT (K) | 3000 | 3000 | 3000 |
| Beams | 14°,28°,44° & 14° + 48° | 14°,28°,44° & 14° + 48° | 14°,28°,44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | D50xH70 | D50xH130 | D50xH130 |
| Weight (Kg) | 0,32 | 0,32 | 0,32 |

CODE ACCESSORIES

| Filter | Red | Yellow | Blue | Green |
|--------|--------------------------------|--------|------|-------|
| CO.001 | IP68 Connection, 2 poles | | | |
| CO.002 | IP68 Connection, 3 poles | | | |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter | | | |
| CO.004 | Cable Ho5RN-F 3G0,75 per meter | | | |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



Forever LED

22 32 03

- Indoor and outdoor waterproof surface mounted LED series.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPCB). 2700K-3000K-4000K.
- CRI 90 upon request.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Multiple spots can be operated through one CC driver in serial connection.
- Input 350, 500, 700mA.
- Dimmable.
- HCB version is equipped with honeycomb filter. Height is 10mm longer.
- LED driver to be ordered separately.



| CODE | 1150AL/BR | 1150HCB AL/BR |
|----------------------|--------------------|--------------------|
| Max Input (mA) | 350 / 500 / 700 DC | 350 / 500 / 700 DC |
| Source Power (W) | 1,05 / 1,5 / 2,1 | 1,05 / 1,5 / 2,1 |
| Lumen Source (lm) | 140 / 200 / 280 | 140 / 200 / 280 |
| Lumen Luminaire (lm) | 112 / 162 / 224 | 112 / 162 / 224 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°, 28°, 44° | 14°, 28°, 44° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (Kg) | 0,32 | 0,42 |

CODE ACCESSORIES

| Filter | Red | Yellow | Blue | Green |
|--------|--|--------|------|-------|
| CO.001 | IP68 Connection, 2 poles | | | |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter | | | |
| CO.018 | Spike made of extruded aluminium grey anodized | | | |
| CO.014 | Anti-glare snoot | | | |
| CO.100 | Tree strap | | | |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



Forever LED

22 32 03


- Indoor and outdoor waterproof surface mounted LED series.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBCB). 2700K-3000K-4000K.
- CRI 90 upon request.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @350mA or 700mA.
- Non dimmable.
- HCB version is equipped with honeycomb filter. Height is 10mm longer.

| CODE | 1140AL/BR | 1140AL/BR | 1140HCB AL/BR | 1140HCB AL/BR |
|----------------------|-------------|-------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 1,05 | 2,1 | 1,05 |
| System Power (W) | 2,2 | 1,1 | 2,2 | 1,1 |
| Driven @ (mA) | 700 | 350 | 700 | 350 |
| Lumen Source (lm) | 280 | 140 | 280 | 140 |
| Lumen Luminaire (lm) | 224 | 112 | 224 | 112 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 |
| Beams | 14°,28°,44° | 14°,28°,44° | 14°,28°,44° | 14°,28°,44° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,32/0,53 | 0,32/0,53 | 0,32/0,53 | 0,32/0,53 |

CODE ACCESSORIES

| | | | | |
|--------|--|--------|------|-------|
| Filter | Red | Yellow | Blue | Green |
| CO.002 | IP68 Connection, 3 poles | | | |
| CO.004 | Cable Ho5RN-F 3G0,75 per meter | | | |
| CO.018 | Spike made of extruded aluminium grey anodized | | | |
| CO.014 | Anti-glare snoot | | | |
| CO.100 | Tree strap | | | |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



Forever Mid

22 03

- Outdoor waterproof LED spot.
- Full luminaire made of machined aluminium to optimize heat dissipation.
- Bridgelux V6 COB LED.
- Clear protection PC 6mm and silicon rings.
- Reflector made of aluminium coated PC with protective lacquer.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- CRI 90 upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- Dimmable.
- HCB version is equipped with honeycomb filter.

| CODE | 1169 | 1169 | 1169 |
|----------------------|-------------|-------------|-------------|
| Max Input (mA) | 350 DC | 500 DC | 700 DC |
| Source Power (W) | 3,2 | 4,7 | 6,8 |
| Lumen Source (lm) | 400/426 | 542/577 | 701/747 |
| Lumen Luminaire (lm) | 320/341 | 435/462 | 560/598 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 13°,28°,48° | 13°,28°,48° | 13°,28°,48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (Kg) | 0,57 | 0,57 | 0,57 |


CODE ACCESSORIES

| | |
|--------|--------------------------------|
| CO.001 | IP68 Connection, 2 poles |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter |
| CO.100 | Tree strap |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



HCB

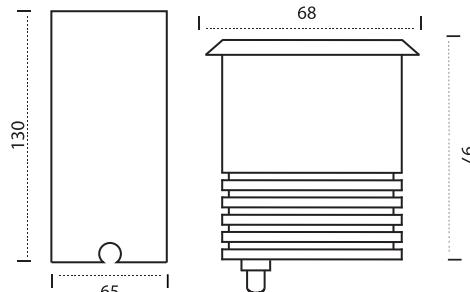

Recessed fixing kit
Included



Forever Mid Recessed

22 03

- Outdoor waterproof LED spot.
- Full luminaire made of machined aluminium to optimize heat dissipation.
- Bridgelux V6 COB LED.
- Stainless steel ring version upon request (1169RSS).
- Clear protection PC 6mm and silicon rings.
- Reflector made of aluminium coated PC with protective lacquer.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- CRI 90 upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- Dimmable.
- HCB version is equipped with honeycomb filter.

| CODE | 1169R | 1169R | 1169R |
|----------------------|-------------|-------------|-------------|
| Max Input (mA) | 350 DC | 500 DC | 700 DC |
| Source Power (W) | 3,2 | 4,7 | 6,8 |
| Lumen Source (lm) | 400/426 | 542/577 | 701/747 |
| Lumen Luminaire (lm) | 320/341 | 435/462 | 560/598 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 13°,28°,48° | 13°,28°,48° | 13°,28°,48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,57 | 0,57 | 0,57 |


CODE ACCESSORIES

| | |
|--------|--------------------------------|
| CO.001 | IP68 Connection, 2 poles |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

GALILEO
LIGHTING

www.galileolighting.it



Forever Mid AC

22 03


- Outdoor waterproof LED spot.
- Full luminaire made of machined aluminium to optimize heat dissipation.
- Edison DOB LED.
- Clear protection PC 6mm and silicon rings.
- Reflector made of aluminium coated PC with protective lacquer.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- CRI 90 upon request.
- Luminaire life time > 30,000 hours at 70% luminous flux.
- Dimmable for triac dimmer.

| CODE | 1169AC |
|----------------------|-----------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Source Power (W) | 7,1 |
| Lumen Source (lm) | 810/835 |
| Lumen Luminaire (lm) | 650/668 |
| CCT (K) | 3000/4000 |
| Beams | 20°,35° |
| CRI | ≥ 80 |
| Weight (kg) | 0,57 |

CODE ACCESSORIES

| | |
|--------|--|
| CO.001 | IP68 Connection, 2 poles |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter |
| CO.018 | Spike made of extruded aluminium grey anodized |
| CO.015 | Anti-glare snoot |
| CO.100 | Tree strap |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



Forever Max LED

22 03


- Outdoor waterproof LED spot.
- Full luminaire made of machined aluminium to optimize heat dissipation.
- Bridgelux V8 COB LED.
- Clear protection PC 6mm and silicon rings.
- Reflector made of aluminium coated PC with protective lacquer.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- CRI 90 upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- Dimmable.
- HCB version is equipped with honeycomb filter.

| CODE | 1160 | 1160HCB |
|----------------------|-------------|-------------|
| Max Input (mA) | 500 DC | 500 DC |
| Source Power (W) | 8,9 | 8,9 |
| Lumen Source (lm) | 1323/1363 | 1323/1363 |
| Lumen Luminaire (lm) | 1058/1091 | 1058/1091 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 13°,28°,48° | 13°,28°,48° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (Kg) | 0,57 | 0,57 |

CODE ACCESSORIES

| | |
|--------|--|
| CO.001 | IP68 Connection, 2 poles |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter |
| CO.018 | Spike made of extruded aluminium grey anodized |
| CO.015 | Anti-glare snoot |
| CO.100 | Tree strap |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

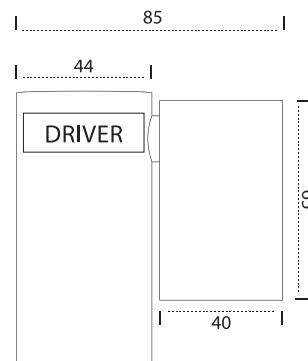

Forever LED Down

22
32
03

- Outdoor waterproof surface mounted LED series.
- Full luminaire made of machined aluminium 6262 or MS58 Brass to optimize heat dissipation.
- Grey anodized aluminium or painted finish. Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBCB).
- Available 2700K, 3000K and 4000K.
- CRI 90 upon request.
- Luminaires with integrated LED driver.
- Anti-corrosion capabilities through the anodization process implemented on the aluminum parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.e. seaside or industrial spaces).
- The anodization process fulfils the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @ 350mA or 700mA.
- Non dimmable.

GALLIS
LIGHTING


www.gallis.gr

| CODE | 1147AL/BR | 1147AL/BR |
|----------------------|----------------------------|----------------------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 1,05 |
| System Power (W) | 2,2 | 1,1 |
| Driven @ (mA) | 700 | 350 |
| Lumen Source (lm) | 280 | 140 |
| Lumen Luminaire (lm) | 224 | 112 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°,28°,44° & 14° + 48° | 14°,28°,44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,32 | 0,32 |

CODE ACCESSORIES

| | | | | |
|--------|-----|--------|------|-------|
| Filter | Red | Yellow | Blue | Green |
|--------|-----|--------|------|-------|

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

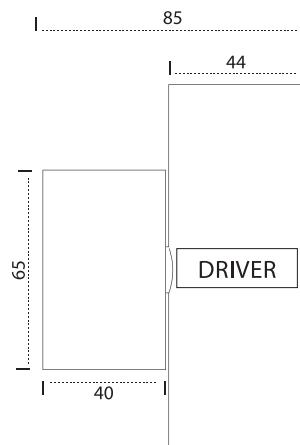

Forever LED Up - Down

22 32 03

- Outdoor waterproof surface mounted LED series.
- Full luminaire made of machined aluminium 6262 or MS58 Brass to optimize heat dissipation.
- Grey anodized aluminium or painted finish. Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBCB).
- Available 2700K, 3000K and 4000K.
- CRI 90 upon request.
- Luminaires with integrated LED driver.
- Anti-corrosion capabilities through the anodization process implemented on the aluminum parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.e. seaside or industrial spaces).
- The anodization process fulfils the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @350mA or 700mA.
- Non dimmable.

| CODE | 1148AL/BR | 1148AL/BR |
|----------------------|------------------------------|------------------------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 2 x 2,1 | 2 x 1,05 |
| System Power (W) | 2 x 2,2 | 2 x 1,1 |
| Driven @ (mA) | 700 | 350 |
| Lumen Source (lm) | 2 x 280 | 2 x 140 |
| Lumen Luminaire (lm) | 2 x 224 | 2 x 112 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,32 | 0,32 |

CODE ACCESSORIES

| Filter | Red | Yellow | Blue | Green |
|--|-----|--------|------|-------|
| FOR ACCESSORIES DETAILS SEE PAGE 150 - 152 | | | | |




Forever Surface

22
32
03

- Outdoor waterproof surface mounted LED series.
- Full luminaire made of machined aluminium 6262 or MS58 Brass to optimize heat dissipation.
- Grey anodized aluminium or painted finish. Frosted protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPCB).
- Available , 3000K and 4000K.
- CRI 85.
- Luminaires with driver on PCB board.
- Anti-corrosion capabilities through the anodization process implemented on the aluminum parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.e. seaside or industrial spaces).
- The anodization process fulfils the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Non dimmable.

| CODE | 1104 | 1104BR |
|----------------------|-------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 3 | 3 |
| Lumen Source (lm) | 240 | 240 |
| Lumen Luminaire (lm) | 210 | 210 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 90° | 90° |
| CRI | ≥ 85 | ≥ 85 |
| Weight (kg) | 0,32 | 0,56 |





Forever Surface

22 32 03

- Indoor and Outdoor waterproof wall mounted LED luminaire.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium or painted finish.
- Clear protection PC 6mm, silicon rings.
- Available , 3000K and 4000K.
- CRI 85.
- Luminaires with driver on PCB board.
- Anti-corrosion capabilities through the anodization process implemented on the aluminium parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.w seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Non dimmable.

| CODE | 1103 | 1103BR |
|----------------------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 3 | 3 |
| Lumen Source (lm) | 240 | 240 |
| Lumen Luminaire (lm) | 210 | 210 |
| CCT (K) | 3000/4000 | 3000/4000 |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,23 | 0,62 |

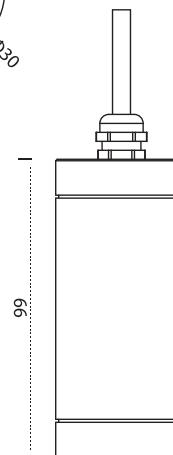

Forever LED Outdoor Pendant

22
32
03


- Outdoor led pendant luminaire.
- Full body made of machined aluminium or MS58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPBCB). 2700K-3000K-4000K.
- CRI 90 upon request.
- Provided with 1, 20 meters of waterproof cable and hanging hook. No base.
- Anti-corrosion capabilities through the anodization process implemented on the aluminum parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.e. seaside or industrial spaces).
- The anodization process fulfills the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @350mA or 700mA.

| CODE | 1156 | 1156 |
|----------------------|------------------------------|------------------------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 1,05 |
| System Power (W) | 2,2 | 1,1 |
| Driven @ (mA) | 700 | 350 |
| Lumen Source (lm) | 280 | 140 |
| Lumen Luminaire (lm) | 224 | 112 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,35 | 0,35 |

CODE ACCESSORIES

| | | | | |
|--------|-----|--------|------|-------|
| Filter | Red | Yellow | Blue | Green |
|--------|-----|--------|------|-------|

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

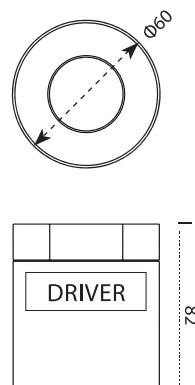

Forever LED Ceiling


22 03

- Outdoor waterproof surface mounted LED series.
- Full luminaire made of machined aluminium 6262 to optimize heat dissipation.
- Grey anodized aluminium or painted finish. Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MPCB).
- Available 2700K, 3000K and 4000K.
- CRI 90 upon request.
- Luminaires with integrated LED driver.
- Anti-corrosion capabilities through the anodization process implemented on the aluminum parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.e. seaside or industrial spaces).
- The anodization process fulfils the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @350mA or 700mA.
- Non dimmable.

| CODE | 1163 | 1163 |
|----------------------|------------------------------|------------------------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 1,05 |
| System Power (W) | 2,2 | 1,1 |
| Driven @ (mA) | 700 | 350 |
| Lumen Source (lm) | 280 | 140 |
| Lumen Luminaire (lm) | 224 | 112 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,36 | 0,36 |

CODE ACCESSORIES

| Filter | Red | Yellow | Blue | Green |
|--|-----|--------|------|-------|
| FOR ACCESSORIES DETAILS SEE PAGE 150 - 152 | | | | |

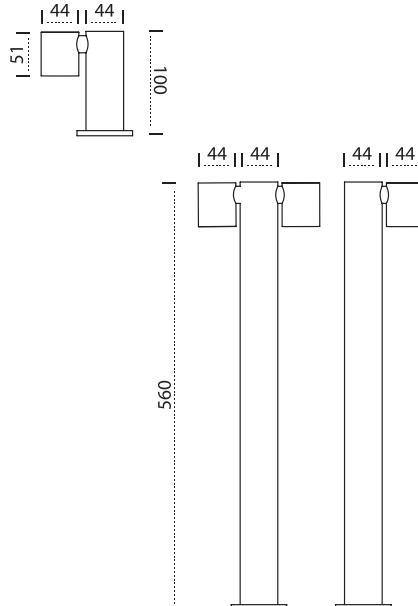

Forever Bollard

22



- Outdoor waterproof surface mounted LED series.
- Full luminaire made of machined aluminium 6262 or Brass MS 58 to optimize heat dissipation.
- Grey anodized aluminium.
- Clear protection PC 6mm, silicon rings.
- Nichia LED mounted on metal core PCB (MCPCB). 2700K-3000K-4000K.
- CRI 90 upon request.
- Anti-corrosion capabilities through the anodization process implemented on the aluminum parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.e. seaside or industrial spaces).
- The anodization process fulfils the criteria of Seaside Class.
- 10 years warranty on the body.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Available @350mA or 700mA.
- Non dimmable.

| CODE | 1171L AL/BR | 1171LAL/BR | 1172LAL/BR | 1172LAL/BR | 1173SAL/BR | 1173SAL/BR |
|----------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 1,05 | 2 x 2,1 | 2 x 1,05 | 2,1 | 1,05 |
| System Power (W) | 2,2 | 1,1 | 2 x 2,2 | 2 x 1,1 | 2,2 | 1,1 |
| Driven @ (mA) | 700 | 350 | 700 | 350 | 700 | 350 |
| Lumen Source (lm) | 280 | 140 | 2 x 280 | 2 x 140 | 280 | 140 |
| Lumen Luminaire (lm) | 224 | 112 | 2 x 224 | 2 x 112 | 224 | 112 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |
| Beams | 14°,28°,44° | 14°,28°,44° | 14°,28°,44° | 14°,28°,44° | 14°,28°,44° | 14°,28°,44° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Height (mm) | 500 | 500 | 500 | 500 | 120,5 | 120,5 |
| Weight (Kg) | 0,32 | 0,32 | 0,32 | 0,32 | 0,32 | 0,32 |

CODE ACCESSORIES

| Filter | Red | Yellow | Blue | Green |
|--------|-----|--------|------|-------|
|--------|-----|--------|------|-------|

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

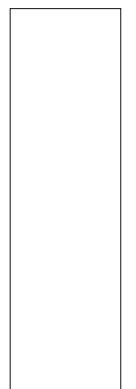



Bollard Thin

22

- Outdoor waterproof surface mounted LED series.
- Full luminaire made of machined aluminium to optimize heat dissipation.
- Based on Bridgelux V10 COB LED.
- Clear protection PC.
- CRI 90 upon request
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Anti-corrosion capabilities through the anodization process implemented on the aluminum parts.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.e. seaside or industrial spaces).
- The anodization process fulfils the criteria of Seaside Class.
- 10 years warranty on the body.
- LED driver included. DALI driver upon request.
- Dimmable options available.

| CODE | 1174 |
|----------------------|-----------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Source Power (W) | 8,7 |
| System Power (W) | 9,1 |
| Lumen Source (lm) | 1323/1363 |
| Lumen Luminaire (lm) | 1058/1091 |
| CCT (K) | 3000/4000 |
| CRI | ≥ 80 |
| Weight (kg) | 2,00 |



Sirius LED Pendant


01 03 26

- Exterior LED multipurpose adjustable projector made in diecast aluminium.
- Clear protection glass, silicon rubber gaskets and stainless steel screws.
- Wall/Ground fixation.
- Bracket with double pivot design for maximum adjustable flexibility (2 x 180°).
- Fixing base plate rotatable 170°.
- Alunova® LED reflector with spherical facets.
- Electrostatic polyester powder coated black, white or alu-grey.
- Passive cooling (no moving parts).The luminaire is suitable for outdoor use, with ambient temperature (on the luminaire) from -40°C to +60°C.
- Tridonic LED COB LES15.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Non Dimmable Driver Included.
- HCB versions are equipped with honeycomb filter.

| CODE | 4613 | 4614 | 4617 | 4618 | 4619 |
|----------------------|---------------|---------------|---------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 17,5 | 24,5 | 31,5 | 37,4 | 43,3 |
| System Power (W) | 18,4 | 25,7 | 33,1 | 39,3 | 45,5 |
| Driven @ (mA) | 500 | 700 | 900 | 1050 | 1200 |
| Lumen Source (lm) | 2960/3060 | 4020/4140 | 5080/5250 | 5815/5970 | 6550/6720 |
| Lumen Luminaire (lm) | 2368/2448 | 3216/3312 | 4064/4176 | 4652/4776 | 5240/5376 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 15°, 36°, 60° | 15°, 36°, 60° | 15°, 36°, 60° | 15°, 36°, 60° | 15°, 36°, 60° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (Kg) | 2,59 | 2,59 | 2,59 | 2,59 | 2,59 |

CODE ACCESSORIES

| | |
|--------------|--------------------------------|
| 0016 | Red Filter |
| 0017 | Yellow Filter |
| 0018 | Blue Filter |
| 0019 | Green Filter |
| HCB - Suffix | Anti-glare Honey Comb |
| CO.002 | IP68 Connection, 3 poles |
| CO.004 | Cable Ho5RN-F 3G0,75 per meter |

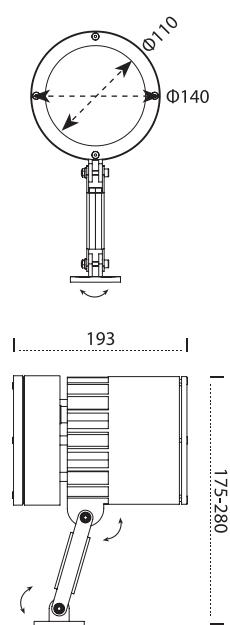

Sirius LED

01 03 26

- Exterior LED multipurpose adjustable projector made in diecast aluminium.
- Clear protection glass, silicon rubber gaskets and stainless steel screws.
- Wall/Ground fixation.
- Bracket with double pivot design for maximum adjustable flexibility (2 x 180°).
- Fixing base plate rotatable 170°.
- Alunova® LED reflector with spherical facets.
- Electrostatic polyester powder coated black, white or alu-grey.
- Passive cooling (no moving parts).The luminaire is suitable for outdoor use, with ambient temperature (on the luminaire) from -40°C to +60°C.
- Tridonic LED COB LES15.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Non Dimmable Driver Included.
- HCB versions are equipped with honeycomb filter.


| CODE | 4613 | 4614 | 4617 | 4618 | 4619 |
|----------------------|---------------|---------------|---------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 17,5 | 24,5 | 31,5 | 37,4 | 43,3 |
| System Power (W) | 18,4 | 25,7 | 33,1 | 39,3 | 45,5 |
| Driven @ (mA) | 500 | 700 | 900 | 1050 | 1200 |
| Lumen Source (lm) | 2960/3060 | 4020/4140 | 5080/5250 | 5815/5970 | 6550/6720 |
| Lumen Luminaire (lm) | 2368/2448 | 3216/3312 | 4064/4176 | 4652/4776 | 5240/5376 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 15°, 36°, 60° | 15°, 36°, 60° | 15°, 36°, 60° | 15°, 36°, 60° | 15°, 36°, 60° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 2,59 | 2,59 | 2,59 | 2,59 | 2,59 |

CODE ACCESSORIES


| | |
|--------------|--------------------------------|
| 0016 | Red Filter |
| 0017 | Yellow Filter |
| 0018 | Blue Filter |
| 0019 | Green Filter |
| HCB - Suffix | Anti-glare Honey Comb |
| CO.002 | IP68 Connection, 3 poles |
| CO.004 | Cable Ho5RN-F 3G0,75 per meter |




Option A: Ceiling Flush mount

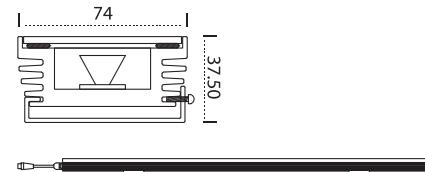

Option B: Pivot Mount

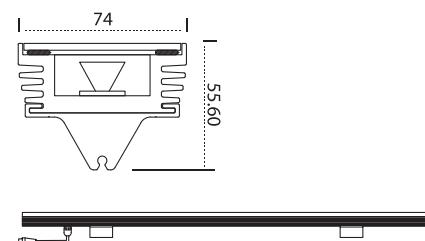

Option C: Recessed



Linealum

22

- Outdoor waterproof luminaire for facade lighting and any demanding application.
- Full luminaire made of extruded aluminium 6063 to optimize heat dissipation.
- Gray anodized aluminium.Tempered glass.
- Monochromatic version equipped with SMD LED's (NICHIA 219) mounted on metal core PCB (MCPCB).
- Powered directly from external constant current driver up to 700mA.
- Driver can be installed up to 300m away from the fixture on a standard power cable.
- Luminaire life time > 50,000 hours at 70% of luminous flux.
- Minimum thickness of the anodized layer is 20µm for outdoor or corrosive environments (i.e. seaside or industrial spaces).
- The anodization process fulfils the criteria of Seaside Class.
- 10 years warranty on the body.
- Available in 2700K,3000K,4000K, RED, GREEN, BLUE.
- RGBW version upon request. Monochromatic versions available RED, GREEN, BLUE @350mA.
- LED driver to be ordered separately.
- MAX Input 700mA.


| CODE | L030 | L060 | L090 | L120 |
|----------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Max Input (mA) | 700 DC | 700 DC | 700 DC | 700 DC |
| Source Power (W) | 5 x 2,1 | 10 x 2,1 | 15 x 2,1 | 20 x 2,1 |
| Lumen Source (lm) | 5 x 280 | 10 x 280 | 15 x 280 | 20 x 280 |
| Lumen Luminaire (lm) | 5 x 224 | 10 x 224 | 15 x 224 | 20 x 224 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 |
| Beams | 14°,28°,44° & 14° + 48° |
| Length (mm) | 300 | 600 | 900 | 1200 |
| Weight (Kg) | 1,50 | 2,30 | 3,10 | 3,90 |

CODE ACCESSORIES

| | |
|--------|--------------------------------|
| CO.001 | IP68 Connection, 2 poles |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter |
| C | Ceiling-wall |
| R | Recessed Box H70mm W77mm |
| BR1 | Pivot bracket H85mm |
| BR2 | Pivot bracket H200mm |



Aspire ,Qatar




Cube LED

03 28 26

- Outdoor LED luminaire.
- Body made of diecast aluminium powder coated.
- Opal polycarbonate diffuser.
- Based on Samsung 3030 LED.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver included.

| CODE | 6580 | 6580 |
|----------------------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 8 | 12 |
| System Power (W) | 8,4 | 12,6 |
| Driven @ (mA) | 350 | 500 |
| Lumen Source (lm) | 1030/1070 | 1470/1530 |
| Lumen Luminaire (lm) | 825/860 | 1175/1220 |
| CCT (K) | 3000/4000 | 3000/4000 |
| CRI | ≥ 80 | ≥ 80 |
| Weight (Kg) | 2,44 | 2,44 |



Morfi LED / UG177 GU10

50

UG177 GU10

- Ground recessed light fixture based on GU 10.
- Body made of diecast aluminium with stainless steel 316 ring and screws.
- Silicon gasket.
- Recessed polycarbonate box included.


MORFI LED

- Ground recessed light fixture based on LED Bridgelux V8.
- Body made of diecast aluminium with stainless steel 316 ring and screws.
- Silicon gasket.
- Recessed polycarbonate box included.
- Frosted glass.
- LED driver to be ordered separately.

| CODE | UG177 | 1167 | 1167 |
|----------------------|---------|---------------|---------------|
| Frequency (Hz) | 50/60 | | |
| Main Voltage (V) | 220-240 | | |
| Max Input (mA) | | 350 DC | 500 DC |
| Source Power (W) | | 6,1 | 8,9 |
| Lumen Source (lm) | | 908/945 | 1261/1311 |
| Lumen Luminaire (lm) | | 726/756 | 1009/1049 |
| CCT (K) | | 3000/4000 | 3000/4000 |
| Lamp Type | GU10 | | |
| Beams | | 13°, 28°, 43° | 13°, 28°, 43° |
| CRI | | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 90 | 90 | 90 |
| Weight (Kg) | 0,8 | 0,8 | 0,8 |

CODE ACCESSORIES

| | | | | | |
|--------|--------------------------------|------------------|----------------|----------------|-------------------|
| CO.001 | IP68 Connection, 2 poles | | | | |
| CO.003 | Cable Ho5RN-F 2X0,75 per meter | | | | |
| Filter | Red R2613 | Yellow G13909 | Blue B71305 | Amber 10405 | Magenta M11114 |


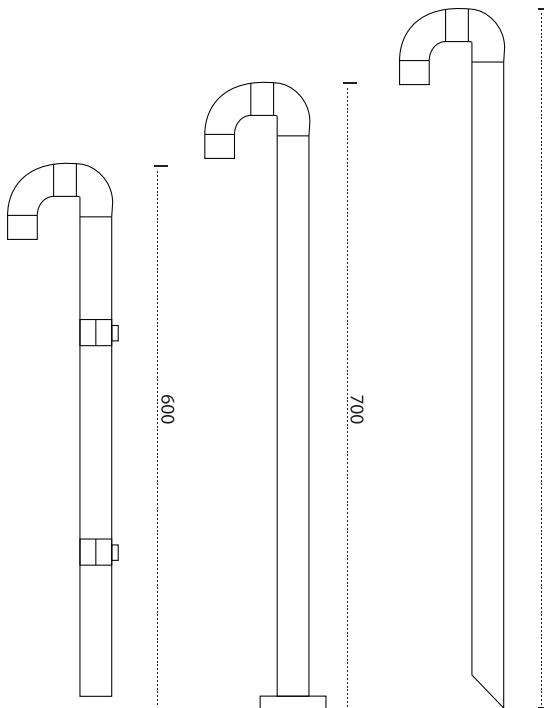


Crook LED

- Outdoor waterproof Bollard type LED, for installation on ground, wall and as spike for garden.
 - Body made of copper and base made of solid brass metal plated copper.
 - Tilttable +/-45deg.
 - Clear protection PC lens, silicon rings.
 - Nichia LED mounted on metal core PCB (MCPCB). 2700K-3000K-4000K, @350mA or 700mA.
 - Available upon request CRI 90 or Red,Green, Blue LED @350mA.
 - Luminaire life time > 50,000 hours at 70% luminous flux.
 - Serviceable LED modules and driver onsite.
 - Non dimmable.

| CODE | 1178 | 1178 | 1178G | 1178G | 1178W | 1178W |
|----------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 1,05 | 2,1 | 1,05 | 2,1 | 1,05 |
| System Power (W) | 2,2 | 1,1 | 2,2 | 1,1 | 2,2 | 1,1 |
| Driven @ (mA) | 700 | 350 | 700 | 350 | 700 | 350 |
| Lumen Source (lm) | 280 | 140 | 280 | 140 | 280 | 140 |
| Lumen Luminaire (lm) | 224 | 112 | 224 | 112 | 224 | 112 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 | 3000 | 3000/4000 |
| Beams | 14°,28°,44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 1,27 | 1,27 | 1,27 | 1,27 | 1,27 | 1,27 |





Folie

01

- Outdoor LED luminaire.
 - Body made of PP.
 - Opal PC cover.
 - Equipped with 2835 SMD LED and on board driver.
 - Luminaire lifetime > 50,000 hours.
- 3 Years Warranty**

| CODE | Round 200 | Oval 160 |
|----------------------|-----------|--------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 18 | 8 |
| CCT (K) | 4000 | 4000 |
| Lumen Luminaire (lm) | 1350 | 600 |
| Dimensions (mm) | Ø200 x 55 | 160 x 9 x 51 |






Multi Projector

03

- Indoor and outdoor LED projector.
- Full luminaire made of aluminium.
- Glass screen.
- In-house developed SMD 3030.
- LED PCB and on board driver.
- Luminaire life time > 30000 hours at 70% luminous flux.

3 Years Warranty

| CODE | Multi 50 | Multi 100 | Multi 150 | Multi 200 |
|-------------------|----------------|----------------|----------------|----------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 50 | 100 | 150 | 200 |
| Lumen Source (lm) | 6000 | 12000 | 15000 | 20000 |
| CCT (K) | 4000 | 4000 | 4000 | 4000 |
| CRI | ≥ 85 | ≥ 85 | ≥ 85 | ≥ 85 |
| Beams | 90° | 60° | 60° 90° | 60° 90° |
| Dimensions (mm) | 233 x 236 x 43 | 267 x 275 x 45 | 378 x 310 x 47 | 444 x 333 x 50 |

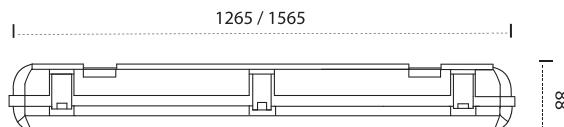

Atlantis LED

- Linear Lighting LED fitting.
- Surface mounted.
- Body made of PC/ABS.
- Based on Samsung 2835 LEDs.
- Opal polycarbonate cover.
- Stainless steel clips.
- CRI>80.
- Tridonic driver.
- Suitable for outdoor use with protection IK08.
- Tridonic emergency kit 3h available upon request.

| CODE | 8934L | 8937L | 8935L | 8938L |
|------------------|---------|---------|---------|---------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Power (W) | 20 | 40 | 30 | 60 |
| Lumen (lm) | 2000 | 4200 | 3400 | 6300 |
| CCT (K) | 4000 | 4000 | 4000 | 4000 |
| Length (mm) L | 1265 | 1265 | 1565 | 1565 |
| Width (mm) W | 90 | 130 | 90 | 130 |
| Height (mm) H | 88 | 88 | 88 | 88 |



Santorini, Greece
WWW.SMARTWORKS.GR



7030

28

- Wall fixed spotlight made from diecast aluminium, powder coated.
- Lampholder GU10.
- Tempered glass cover.

| CODE | 7030 |
|------------------|----------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Dimension (mm) | Ø63 x 92 |



7031

28

- Wall fixed UP-DOWN spotlight made from diecast aluminium, powder coated.
- Lampholder GU10.
- Tempered glass covers.

| CODE | 7031 |
|------------------|-----------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Dimension (mm) | Ø63 x 137 |



7141

28

- Wall fixed spotlight made from diecast aluminium, powder coated.
- Lampholder GU10.
- Tempered glass cover.

| CODE | 7041 |
|------------------|--------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Cut Out Ø (mm) | 65 x 92 x 78 |



7142

28

- Wall fixed UP-DOWN spotlight made from diecast aluminium, powder coated.
- Lampholders GU10.
- Tempered glass covers.

| CODE | 7042 |
|------------------|---------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Cut Out Ø (mm) | 65 x 92 x 150 |



7143

01 03 28

- Wall adjustable(0-90°)spotlight made from diecast aluminium, powder coated.
- Lampholder GU10.
- Tempered glass cover.



| CODE | 7043 |
|------------------|--------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Cut Out Ø (mm) | 63 x 94 x 98 |

B1013C

26

- Ceiling fixed downlights made from diecast aluminium, powder coated.
- Lampholder E27 PAR30.



| CODE | 7031 |
|------------------|------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 75 |
| Lampholder | E27 |
| Dimension (mm) | Ø110 x 140 |

WL452

26

- Wall fixed UP-DOWN spotlight made from diecast aluminium, powder coated.
- Lampholders 2 x E27 PAR20.



| CODE | 7041 |
|------------------|-----------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | E27 |
| Dimension (mm) | Ø90 x 267 |

B2000A-2

26

- Wall fixed UP-DOWN spotlight made from diecast aluminium, powder coated.
- Lampholders GU10.




| CODE | 7042 |
|------------------|---------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Cut Out Ø (mm) | 60 x 60 x 150 |



LED Linear 02

pages 54 - 69



CUSTOMIZED
LENGTH
UPON
REQUEST

Ena LED

01 03 26 50

- Linear LED lighting fixture surface mounted or suspended.
- Body made of extruded aluminium with PC opal cover, polyester powder white, black or grey.
- Intergraded Driver.
- Correlated Color Temperature (CCT) 3000K, 4000K,(single 3-step MacAdam ellipse), CRI >85.
- Based on LED modules of length 280mm.
- Homogeneous light distribution.
- Dimming DSI or Dali available on request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Emergency version only for codes 3652 and 3653.
- End caps included.

GALLIS
LIGHTING

www.gallis.gr

| CODE | 3650 | 3651 | 3652 | 3653 |
|----------------------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,7 | 19 | 25,4 | 31,7 |
| System Power (W) | 13,3 | 20 | 26,7 | 33,3 |
| Lumen Source (lm) | 1830/1960 | 2750/2940 | 3660/3920 | 4580/4900 |
| Lumen Luminaire (lm) | 1470/1570 | 2200/2360 | 2930/3140 | 3670/3930 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 565 | 845 | 1125 | 1405 |
| Weight (Kg) | 2 | 3 | 3,8 | 4,8 |

| CODE | 3650 M | 3651 M | 3652 M | 3653 M |
|----------------------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 24 | 32 | 40 |
| System Power (W) | 21 | 25,2 | 33,6 | 42 |
| Lumen Source (lm) | 2690/2810 | 4030/4220 | 5380/5620 | 6720/7030 |
| Lumen Luminaire (lm) | 2150/2250 | 3225/3380 | 4310/4500 | 5380/5630 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 565 | 845 | 1125 | 1405 |
| Weight (Kg) | 2 | 3 | 3,8 | 4,8 |



ACCESSORIES CODE

| | |
|------|---------------------------------------|
| 4047 | Suspension cable with power supply |
| 4048 | Suspension cable without power supply |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



LED LINEAR

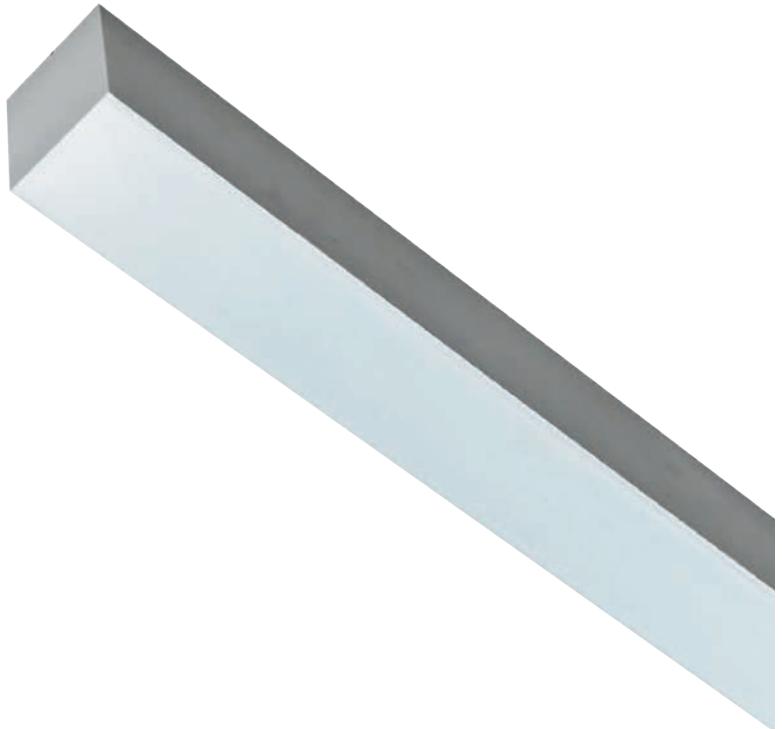

CUSTOMIZED
LENGTH
UPON
REQUEST

E-Free LED

01 03 26

- Linear Lighting LED fitting.
- Surface mounted or suspended.
- Body made of extruded aluminium polyester powder coating white black or grey.
- Based on LED Tridonic modules 350 mA, 3000K ,4000K.
- Opal polycarbonate diffuser.
- ALANOD reflector.
- Provided with direct ceiling installation equipment.
- Different types of connectors for linear.
- Dimming option DSI or Dali available.
- Emergency version for Codes 4702 & 4703.
- Luminaire life time > 50,000 hours at 80% of luminous flux.

| CODE | 4700 | 4701 | 4702 | 4703 | 4706 corner 90° |
|----------------------|-----------|-----------|-----------|-----------|-----------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,7 | 19 | 25,4 | 31,7 | 12,7 |
| System Power (W) | 13,3 | 20 | 26,7 | 33,3 | 13,3 |
| Lumen Source (lm) | 1830/1960 | 2750/2940 | 3660/3920 | 4580/4900 | 1830/1960 |
| Lumen Luminaire (lm) | 1470/1570 | 2200/2360 | 2930/3140 | 3670/3930 | 1470/1570 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 565 | 845 | 1125 | 1405 | 315 x 315 |
| Weight (kg) | 1 | 1,2 | 1,75 | 1,98 | 1,1 |

| CODE | 4700 M | 4701 M | 4702 M | 4703 M | 4706 M corner 90° |
|----------------------|-----------|-----------|-----------|-----------|-------------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 24 | 32 | 40 | 16 |
| System Power (W) | 21 | 25,2 | 33,6 | 42 | 21 |
| Lumen Source (lm) | 2690/2810 | 4030/4220 | 5380/5620 | 6720/7030 | 2690/2810 |
| Lumen Luminaire (lm) | 2150/2250 | 3225/3380 | 4310/4500 | 5380/5630 | 2150/2250 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 565 | 845 | 1125 | 1405 | 315 x 315 |
| Weight (kg) | 1 | 1,2 | 1,75 | 1,98 | 1,1 |


ACCESSORIES CODE

| | |
|------|---------------------------------------|
| 4047 | Suspension cable with power supply |
| 4048 | Suspension cable without power supply |
| 4707 | End Caps (pair) |
| 4055 | Linear connectors (pair) |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

GALLIS
LIGHTING


www.gallis.gr



Wood E-Free LED

- Linear Lighting LED fitting.
- Suspended mounted.
- Body made of extruded aluminium polyester powder coating and natural wood.
- Based on LED Tridonic modules 350 mA, 3000K ,4000K.
- Opal polycarbonate diffuser.
- ALANOD reflector.
- Provided with suspension.
- Dimming option DSI or Dali available.
- Emergency version for Codes 4702 & 4703.
- Luminaire life time > 50,000 hours at 80% of luminous flux.


| CODE | 4702 WOOD | 4703 WOOD |
|----------------------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 25,4 | 31,7 |
| System Power (W) | 26,7 | 33,3 |
| Lumen Source (lm) | 3660/3920 | 4580/4900 |
| Lumen Luminaire (lm) | 2930/3140 | 3670/3930 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Length (mm) | 1200 | 1500 |
| Weight (Kg) | 2,75 | 2,98 |




Wood Sevil

- Linear Lighting LED fitting.
- Suspended mounted.
- Body made of extruded aluminium polyester powder coated and natural wood.
- Based on LED strip 3000K/4000K.
- Opal polycarbonate diffuser.
- Provided with ceiling suspension.
- Dimming option DSI or Dali available.
- Luminaire life time > 50,000 hours at 80% of luminous flux.
- Available in 24V and 230 VAC versions.
- Other sizes upon request.

| CODE | WOOD SEVIL 106 | WOOD SEVIL 106 UP/DOWN |
|----------------------|----------------|------------------------|
| Frequency (Hz) | 50/60 or 0 | 50/60 or 0 |
| Main Voltage (V) | 220-240 or 24V | 220-240 or 24V |
| Source Power (w) | 14,4 | 25 |
| System Power (w) | 15,2 or 14,4 | 27 or 25 |
| Lumen Source (lm) | 1200 | 2040 |
| Lumen Luminaire (lm) | 840 | 1428 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Length (mm) | 1060 | 1060 |
| Weight (kg) | 2,40 | 2,50 |

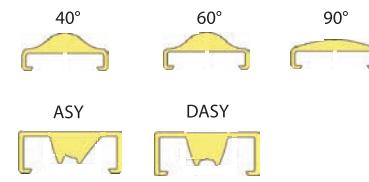

AVAILABLE LENSES



Collect

01
03
26

- High efficiency LED linear lighting fitting.
- Surface mounted or suspended.
- Body made of extruded aluminium polyester powder coated white black or grey.
- Equipped with Tridonic LED modules & Lenses.
- Assymetric beam also available.
- Provided with direct ceiling installation equipment.
- Luminaire life time > 50,000 hours at 70% of luminous flux.
- Non Dimmable Driver included. Dimmable version upon request.


| CODE | 5004 | 5004/AS | 5004/DASY | 5005 | 5005/AS | 5005/DASY |
|----------------------|---------------|------------|----------------|---------------|------------|----------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 25,4 | 25,4 | 25,4 | 31,7 | 31,7 | 31,7 |
| System Power (W) | 26,7 | 26,7 | 26,7 | 33,3 | 33,3 | 33,3 |
| Lumen Source (lm) | 3660/3920 | 3660/3920 | 3660/3920 | 4580/4900 | 4580/4900 | 4580/4900 |
| Lumen Luminaire (lm) | 3551/3803 | 3478/3724 | 3362/3606 | 4443/4753 | 4351/4655 | 4148/4508 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 40°, 60°, 90° | Assymetric | Assymetric x 2 | 40°, 60°, 90° | Assymetric | Assymetric x 2 |
| Length (mm) | 1120 | 1120 | 1120 | 1420 | 1420 | 1420 |

| CODE | 5004M | 5004M/AS | 5004M/DASY | 5005M | 5005M/AS | 5005M/DASY |
|----------------------|---------------|------------|----------------|---------------|------------|----------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 32 | 32 | 32 | 40 | 40 | 40 |
| System Power (W) | 33,6 | 33,6 | 33,6 | 42 | 42 | 42 |
| Lumen Source (lm) | 5380/5620 | 5380/5620 | 5380/5620 | 6720/7030 | 6720/7030 | 6720/7030 |
| Lumen Luminaire (lm) | 5219/5452 | 5111/5339 | 4950/5171 | 6519/6820 | 6384/6679 | 6183/6468 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 40°, 60°, 90° | Assymetric | Assymetric x 2 | 40°, 60°, 90° | Assymetric | Assymetric x 2 |
| Length (mm) | 1120 | 1120 | 1120 | 1420 | 1420 | 1420 |

CODE ACCESSORIES

- | | |
|------|---------------------------------------|
| 4047 | Suspension cable with power supply |
| 4048 | Suspension cable without power supply |





CUSTOMIZED
LENGTH
UPON
REQUEST

Multiline LED

01

- Linear LED lighting for surface or suspended.
- Body made of extruded profile aluminium for passive cooling, with opal polycarbonate diffuser.
- Based on LED modules 350 mA, 3000K or 4000K.
- Base made from sheet metal painted in powder white.
- Polycarbonate end cups included.
- Homogeneous light distribution on whole beam.
- Suspension to be ordered separately.
- Luminaire life time > 50,000 hours at 80%.


| CODE | 3510 | 3510 M | 3520 M | 3530 M | 3540 M |
|----------------------|-------------|---------------|---------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 24 | 32 | 40 | 48 |
| System Power (W) | 21 | 25,2 | 33,6 | 42 | 50,4 |
| Lumen Source (lm) | 2690/2810 | 4030/4220 | 5380/5620 | 6720/7030 | 8070/8430 |
| Lumen Luminaire (lm) | 2150/2250 | 3225/3380 | 4310/4500 | 5380/5630 | 6460/6750 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 580 | 900 | 1180 | 1480 | 1700 |
| Weight (kg) | 1,1 | 1,4 | 1,7 | 2 | 2,3 |

| CODE | 3500 L | 3510 L | 3520 L | 3530 L | 3540 L |
|----------------------|---------------|---------------|---------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,7 | 19 | 25,4 | 31,7 | 38,1 |
| System Power (W) | 13,3 | 20 | 26,7 | 33,3 | 40 |
| Lumen Source (lm) | 1830/1960 | 2750/2940 | 3660/3920 | 4580/4900 | 5490/5880 |
| Lumen Luminaire (lm) | 1470/1570 | 2200/2360 | 2930/3140 | 3670/3930 | 4400/4710 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 580 | 900 | 1180 | 1480 | 1700 |
| Weight (kg) | 1,1 | 1,4 | 1,7 | 2 | 2,3 |

ACCESSORIES CODE

| | |
|------|---------------------------------------|
| 4047 | Suspension cable with power supply |
| 4048 | Suspension cable without power supply |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



CUSTOMIZED
LENGTH
UPON
REQUEST

Astroline LED

01 03 26


- High output surface mounted or pendant Linear LED lighting system for continuous light.
- Body made of extruded aluminium powder coated white, black or grey.
- Polycarbonate diffuser.
- Single 3-step MacAdam ellipse, CRI >85.
- Based on LED modules of length 280mm.
- Seamless: no shadows between modules.
- Homogeneous light distribution.
- Highly efficient passive cooling system with large surface on top of luminaire for heat management.
- End-caps to be ordered separately.
- Suspension cables to be ordered separately.
- Driver included.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 3090 | 3091 | 3092 | 3093 | 3094 |
|----------------------|-----------|-----------|-----------|-------------|-------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 23,9 | 35,9 | 47,8 | 95,6 | 143,4 |
| System Power (W) | 25 | 37,7 | 50 | 100 | 151 |
| Lumen Source (lm) | 4000/4210 | 6000/6320 | 8000/8420 | 16000/16840 | 24000/25260 |
| Lumen Luminaire (lm) | 3200/3370 | 4800/5056 | 6400/6740 | 12800/13480 | 19200/20220 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 560 | 840 | 1120 | 2240 | 3360 |
| Weight (kg) | 1,8 | 2,4 | 3,2 | 6,4 | 9,6 |

ACCESSORIES CODE

| | |
|------|---------------------------------------|
| 4047 | Suspension cable with power supply |
| 4048 | Suspension cable without power supply |
| 3089 | End Caps (pair) |
| 4540 | Linear connectors (pair) |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



Trigono

01 03 26

- Triangular linear lighting fitting equipped with TRIDONIC LED modules.
- Surface mounted or for corner installation.
- Body made of extruded aluminium powder coated with opal PC diffuser.
- Rotating arm options for up to 360° rotation. (To be ordered separately). Arm size 30mm
- Integrated LED Driver.
- Dimming options available upon request.


| CODE | L-3010-M | L-3011-M | L-3012-M | L-3013-M |
|----------------------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 24 | 32 | 40 |
| System Power (W) | 21 | 25,2 | 33,6 | 42 |
| Lumen Source (lm) | 2690/2810 | 4030/4220 | 5380/5620 | 6720/7030 |
| Lumen Luminaire (lm) | 2150/2250 | 3225/3380 | 4310/4500 | 5380/5630 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 580 | 900 | 1180 | 1480 |
| Weight (kg) | 1,5 | 2,1 | 2,6 | 3,2 |

| CODE | L-3010-L | L-3011-L | L-3012-L | L-3013-L |
|----------------------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,7 | 19 | 25,4 | 31,7 |
| System Power (W) | 13,3 | 20 | 26,7 | 33,3 |
| Lumen Source (lm) | 1830/1960 | 2750/2940 | 3660/3920 | 4580/4900 |
| Lumen Luminaire (lm) | 1470/1570 | 2200/2360 | 2930/3140 | 3670/3930 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 580 | 900 | 1180 | 1480 |
| Weight (kg) | 1,5 | 2,1 | 2,6 | 3,2 |

ACCESSORIES CODE

| | |
|------|---|
| 3050 | Fixed End cap (pair) |
| 3051 | Rotating End cap (pair) |
| 3052 | Rotating Arm (pair) H70mm Rotation 45°/270° |
| 3053 | Rotating Arm (pair) H100mm Rotation 360° |
| 3054 | Rotating Arm (pair) H250mm Rotation 360° |
| 3055 | Suspension cable without power supply cord (pair) |
| 3056 | Ceiling Attachment Elements (pair) |
| 3057 | Line connection Cover (External) |
| 4055 | Concealed Line coupling element |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



CUSTOMIZED
LENGTH
UPON
REQUEST




PC LED Tube

- Tubular linear lighting fitting made from clear polycarbonate.
- In house developed PCB with thermal protection by current reduction.
- Available in 3000K-4000K.
- 140 Lumens per Watt.
- Led chip pitch 15 mm.
- Rotated in different positioning.
- Able to be connected in a daisy chain up to 15m.
- Dimming Controller available.
- Driven at 24V DC constant voltage (not included).

| CODE | PC-900-030 | PC-900-060 | PC-900-090 | PC-900-120 | PC-900-150 |
|-----------------------|------------|------------|------------|------------|------------|
| Nominal Voltage (VDC) | 24 | 24 | 24 | 24 | 24 |
| Source Power (W) | 4,8 | 9,6 | 14,4 | 19,2 | 24 |
| Lumen Source (lm) | 680 | 1360 | 2040 | 2720 | 3400 |
| Lumen Luminaire (lm) | 550 | 1100 | 1650 | 2200 | 2750 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 300 | 600 | 900 | 1200 | 1500 |

| CODE | PC-900-180 | PC-900-210 |
|-----------------------|------------|------------|
| Nominal Voltage (VDC) | 24 | 24 |
| Source Power (W) | 28,8 | 33,6 |
| Lumen Source (lm) | 4080 | 4760 |
| Lumen Luminaire (lm) | 3300 | 3850 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Length (mm) | 1800 | 2100 |

| CODE | 89030/GALLIS | 89100/GALLIS | 89150/GALLIS |
|--------------------|--------------|--------------|--------------|
| Type | CV driver | CV driver | CV driver |
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Max Power (W) | 30 | 100 | 150 |
| Output Voltage (V) | 24 | 24 | 24 |
| IP | 67 | 67 | 20 |



loli 2 LED Surface

01


26

- Linear luminaire with LED modules and driver TRIDONIC.
- Surface mounted.
- Body made of steel sheet powder coated.
- Asymmetric distribution reflector.
- Integrated LED driver.

| CODE | 4321L | 4322L | 4323L | 4321M | 4322M | 4323M |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 19 | 25,4 | 31,7 | 24 | 32 | 40 |
| System Power (W) | 20 | 26,7 | 33,3 | 25,2 | 33,6 | 42 |
| Lumen Source (lm) | 2750/2940 | 3660/3920 | 4280/4900 | 4030/4220 | 5380/5620 | 6720/7030 |
| Lumen Luminaire (lm) | 2200/2350 | 2930/3140 | 3430/3920 | 3230/3380 | 4300/4500 | 5380/5630 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 880 | 1180 | 1480 | 880 | 1180 | 1480 |
| Weight (kg) | 2,5 | 3,3 | 4,1 | 2,5 | 3,3 | 4,1 |



LED LINEAR ASYMMETRIC

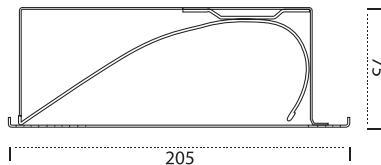

loli 2 LED Recessed


01 26

- Linear luminaire with LED modules and driver TRIDONIC.
- Recessed mounted.
- Body made of steel sheet powder coated.
- Asymmetric distribution reflector.
- Integrated LED driver.

| CODE | 4326L | 4327L | 4328L | 4326M | 4327M | 4328M |
|----------------------|-----------|------------|------------|-----------|------------|------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 19 | 25,4 | 31,7 | 24 | 32 | 40 |
| System Power (W) | 20 | 26,7 | 33,3 | 25,2 | 33,6 | 42 |
| Lumen Source (lm) | 2750/2940 | 3660/3920 | 4280/4900 | 4030/4220 | 5380/5620 | 6720/7030 |
| Lumen Luminaire (lm) | 2200/2350 | 2930/3140 | 3430/3920 | 3230/3380 | 4300/4500 | 5380/5630 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Cut out (mm) | 175 x 880 | 175 x 1180 | 175 x 1480 | 175 x 880 | 175 x 1180 | 175 x 1480 |
| Weight (kg) | 3 | 3,9 | 4,2 | 3 | 3,9 | 4,2 |

 **GALLIS**
LIGHTING

www.gallis.gr



 OPAL 

Can be combined with Starlight Linear

CUSTOMIZED
LENGTH
UPON
REQUEST

Kanali 40 Deep Starlight

01 03 26


- Indoor recessed linear LED lighting system for continuous light lines installation.
- Recessed for plasterboard false ceiling.
- Body made of extruded aluminium powder coated white, black or metallic-grey.
- Polycarbonate diffuser.
- Correlated Color Temperature (CCT) 3000K, 4000K, (single 3-step MacAdam ellipse), CRI >80.
- Based on LED modules of length 280mm.
- No shadows between modules. Homogeneous light distribution.
- Highly efficient passive cooling system with large surface on top of luminaire for heat management.
- End-caps to be ordered separately.
- LED driver integrated.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Can be combined with Starlight Linear spot. (see page 065)

| CODE | 1020 L | 1021 L | 1022 L | 1023 L | 1024 L |
|----------------------|-----------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,7 | 19 | 25,4 | 31,7 | 38,1 |
| System Power (W) | 13,3 | 20 | 26,7 | 33,3 | 40 |
| Lumen Source (lm) | 1830/1960 | 2750/2940 | 3660/3920 | 4580/4900 | 5490/5880 |
| Lumen Luminaire (lm) | 1470/1570 | 2200/2360 | 2930/3140 | 3670/3930 | 4400/4705 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 600 | 875 | 1151 | 1440 | 1720 |
| Cut out (mm) | 591 x 40 | 870 x 40 | 1145 x 40 | 1429 x 40 | 1709 x 40 |
| Weight (kg) | 1,3 | 1,5 | 1,9 | 2,2 | 2,5 |

| CODE | 1020 M | 1021 M | 1022 M | 1023 M | 1024 M |
|----------------------|-----------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 24 | 32 | 40 | 48 |
| System Power (W) | 21 | 25,2 | 33,6 | 42 | 50,4 |
| Lumen Source (lm) | 2690/2810 | 4030/4220 | 5380/5620 | 6720/7030 | 8070/8430 |
| Lumen Luminaire (lm) | 2150/2250 | 3225/3380 | 4310/4500 | 5380/5630 | 6460/6750 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 600 | 875 | 1151 | 1440 | 1720 |
| Cut out (mm) | 591 x 40 | 870 x 40 | 1145 x 40 | 1429 x 40 | 1709 x 40 |
| Weight (kg) | 1,3 | 1,5 | 1,9 | 2,2 | 2,5 |

ACCESSORIES CODE

| | |
|------|--------------------------|
| 1029 | End Caps (pair) |
| 1028 | Linear connectors (pair) |



CUSTOMIZED
LENGTH
UPON
REQUEST

Kanali 70 Linear LED

01 03 26

- Indoor recessed linear LED lighting fitting.
- Luminaire body made of extruded aluminium, polycarbonate diffuser and metal sheet end cups.
- Based on LED modules 350 mA.
- Correlated Color Temperature (CCT) 3000K, 4000K.
- Driver included.
- Dimmable options available.
- Luminaire life time > 50,000 hours at 80% of luminous flux.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 4580 L | 4581 L | 4582 L | 4583 L | 4584 L |
|----------------------|-----------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,7 | 19 | 25,4 | 31,7 | 38,1 |
| System Power (W) | 13,3 | 20 | 26,7 | 33,3 | 40 |
| Lumen Source (lm) | 1830/1960 | 2750/2940 | 3660/3920 | 4580/4900 | 5490/5880 |
| Lumen Luminaire (lm) | 1470/1570 | 2200/2360 | 2930/3140 | 3670/3930 | 4400/4705 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 588 | 868 | 1148 | 1428 | 1708 |
| Cut out (mm) | 568 x 78 | 848 x 78 | 1128 x 78 | 1408 x 78 | 1688 x 78 |
| Weight (kg) | 1,1 | 1,4 | 1,7 | 2 | 2,3 |

| CODE | 4580 M | 4581 M | 4582 M | 4583 M | 4584 M |
|----------------------|-----------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 24 | 32 | 40 | 48 |
| System Power (W) | 21 | 25,2 | 33,6 | 42 | 50,4 |
| Lumen Source (lm) | 2690/2810 | 4030/4220 | 5380/5620 | 6720/7030 | 8070/8430 |
| Lumen Luminaire (lm) | 2150/2250 | 3225/3380 | 4310/4500 | 5380/5630 | 6460/6750 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 588 | 868 | 1148 | 1428 | 1708 |
| Cut out (mm) | 568 x 78 | 848 x 78 | 1128 x 78 | 1408 x 78 | 1688 x 78 |
| Weight (kg) | 1,1 | 1,4 | 1,7 | 2 | 2,3 |


ACCESSORIES CODE

| | |
|------|--------------------------|
| 4469 | End Caps (pair) |
| 4503 | Linear connectors (pair) |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

GALLIS
LIGHTING

www.gallis.gr

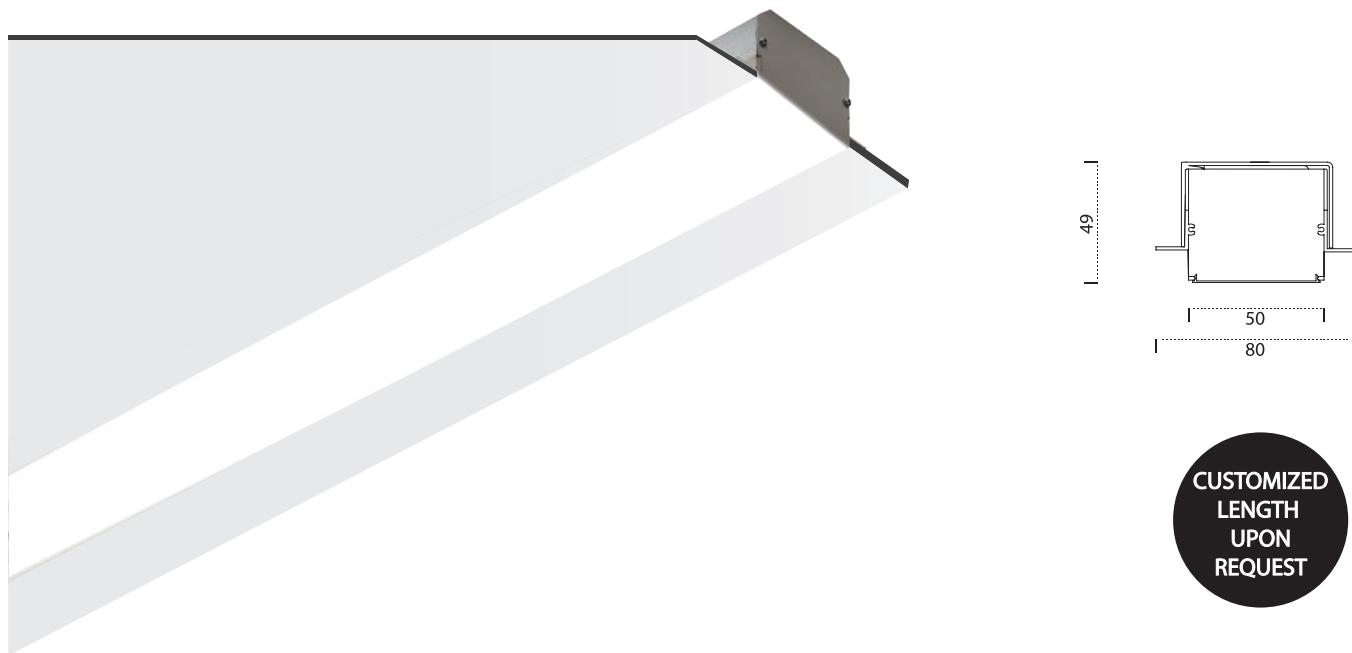

Kanali 50 Frameless LED

01

- Indoor recessed linear LED lighting system for continuous light lines installation.
- Recessed frameless for plasterboard false ceiling.
- Body made of extruded aluminium powder coated white, polycarbonate diffuser.
- Correlated Color Temperature (CCT) 3000K, 4000K (single 3-step MacAdam ellipse), CRI >80. Other CCT available on request.
- Based on LED modules of length 280mm, Seamless: no shadows between modules. Homogeneous light distribution.
- Highly efficient passive cooling system with large surface on top of luminaire for heat management.
- End-caps to be ordered separately. LED driver integrated.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 1220/50 | 1221/50 | 1222/50 | 1223/50 |
|----------------------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,7 | 19 | 25,4 | 31,7 |
| System Power (W) | 13,3 | 20 | 26,7 | 33,3 |
| Lumen Source (lm) | 1830/1960 | 2750/2940 | 3660/3920 | 4580/4900 |
| Lumen Luminaire (lm) | 1470/1570 | 2200/2360 | 2930/3140 | 3670/3930 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 563 | 845 | 1125 | 1405 |
| Cut out (mm) | 563 x 52 | 845 x 52 | 1125 x 52 | 1405 x 52 |
| Weight (kg) | 2,3 | 3,8 | 4,8 | 6,1 |

| CODE | 1220 M /50 | 1221 M /50 | 1222 M /50 | 1223 M /50 |
|----------------------|------------|------------|------------|------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 24 | 32 | 40 |
| System Power (W) | 21 | 25,2 | 33,6 | 42 |
| Lumen Source (lm) | 2690/2810 | 4030/4220 | 5380/5620 | 6720/7030 |
| Lumen Luminaire (lm) | 2150/2250 | 3225/3380 | 4310/4500 | 5380/5630 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 563 | 845 | 1125 | 1405 |
| Cut out (mm) | 563 x 52 | 845 x 52 | 1125 x 52 | 1405 x 52 |
| Weight (kg) | 2,3 | 3,8 | 4,8 | 6,1 |



ACCESSORIES CODE

| | |
|------|---------------------------------|
| 4055 | Concealed Line coupling element |
|------|---------------------------------|

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152



LED LINEAR

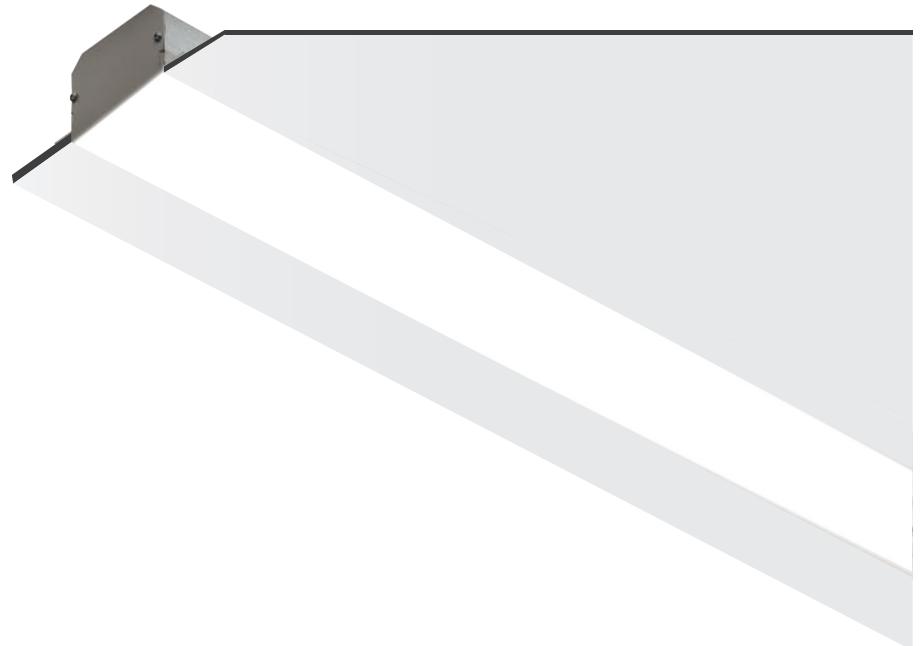

CUSTOMIZED
LENGTH
UPON
REQUEST

Kanali 70 Frameless LED

01

- Indoor recessed linear LED lighting system for continuous light lines installation.
- Recessed frameless for plasterboard false ceiling.
- Body made of extruded aluminium powder coated white, polycarbonate diffuser.
- Correlated Color Temperature (CCT) 3000K, 4000K (single 3-step MacAdam ellipse), CRI >80. Other CCT available on request.
- Based on LED modules of length 280mm, Seamless: no shadows between modules. Homogeneous light distribution.
- Highly efficient passive cooling system with large surface on top of luminaire for heat management.
- End-caps to be ordered separately. LED driver integrated.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 1220 | 1221 | 1222 | 1223 |
|----------------------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,7 | 19 | 25,4 | 31,7 |
| System Power (W) | 13,3 | 20 | 26,7 | 33,3 |
| Lumen Source (lm) | 1830/1960 | 2750/2940 | 3660/3920 | 4580/4900 |
| Lumen Luminaire (lm) | 1470/1570 | 2200/2360 | 2930/3140 | 3670/3930 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 563 | 845 | 1125 | 1405 |
| Cut out (mm) | 563 x 72 | 845 x 72 | 1125 x 72 | 1405 x 72 |
| Weight (kg) | 2,3 | 3,8 | 4,8 | 6,1 |

| CODE | 1220 M | 1221 M | 1222 M | 1223 M |
|----------------------|-----------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 24 | 32 | 40 |
| System Power (W) | 21 | 25,2 | 33,6 | 42 |
| Lumen Source (lm) | 2690/2810 | 4030/4220 | 5380/5620 | 6720/7030 |
| Lumen Luminaire (lm) | 2150/2250 | 3225/3380 | 4310/4500 | 5380/5630 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Length (mm) | 563 | 845 | 1125 | 1405 |
| Cut out (mm) | 563 x 72 | 845 x 72 | 1125 x 72 | 1405 x 72 |
| Weight (kg) | 2,3 | 3,8 | 4,8 | 6,1 |

ACCESSORIES CODE

| | |
|------|--------------------------|
| 1224 | End Caps (pair) |
| 1225 | Linear connectors (pair) |

FOR ACCESSORIES DETAILS SEE PAGE 150 - 152

GALLIS
LIGHTING

www.gallis.gr


Recessed Downlights

pages 72 - 109


03




9018



9017

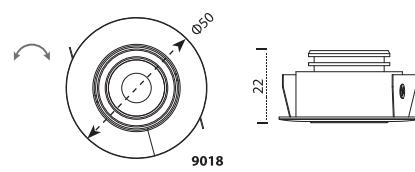

9018

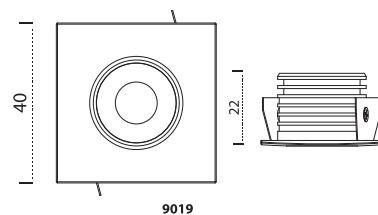

9019



9019





Starlight

01
03
26
22

- Indoor recessed LED spotlight.
- Body and front ring made of machined aluminium to optimize heat dissipation.
- Stainless steel springs.
- Nichia LED mounted on metal core PCB (MCPCB) 2700K, 3000K, 4000K.
- Starlight Recessed Round (9017) is fixed & code 9018 is adjustable with rotation angle ±30°.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 9017 | 9018 | 9019 |
|----------------------|------------------------------|------------------------------|------------------------------|
| Max Input (mA) | 350 / 500 / 700 DC | 350 / 500 / 700 DC | 350 / 500 / 700 DC |
| Source Power (W) | 1,05 / 1,5 / 2,1 | 1,05 / 1,5 / 2,1 | 1,05 / 1,5 / 2,1 |
| Lumen Source (lm) | 140 / 200 / 280 | 140 / 200 / 280 | 140 / 200 / 280 |
| Lumen Luminaire (lm) | 112 / 162 / 224 | 112 / 162 / 224 | 112 / 162 / 224 |
| CCT (K) | 3000 | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| IP | 44 | 20 | 44 |
| Cut Out Ø (mm) | 33 | 41 | 33 |
| Weight (kg) | 0,04 | 0,05 | 0,04 |

RECESSED DOWNLIGHTS

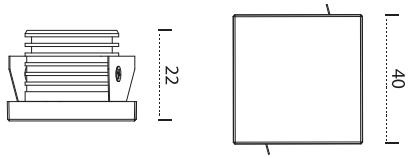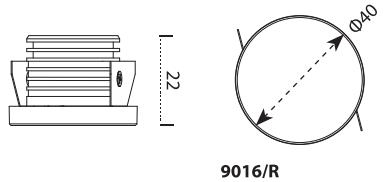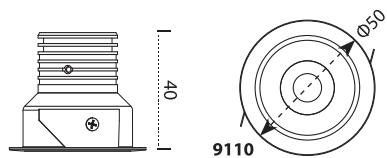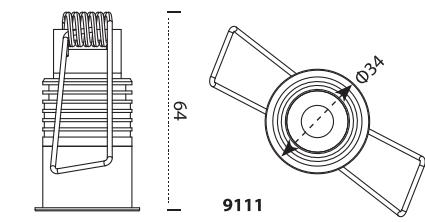

Starlight Deep, Dark, Deco





- Indoor recessed fixed LED spotlight.
- Body and front ring made of machined aluminium to optimize heat dissipation.
- Stainless steel springs.
- Nichia LED mounted on metal core PCB (MCPCB) 2700K, 3000K, 4000K.
- LED and Lens recessed deep in the ceiling.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- CRI 90 available upon request.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

STARLIGHT DEEP (9110): Conical front ring for reduced glare.

STARLIGHT DARK (9111): Cylindrical front ring to create anti-glare snoot effect.

| CODE | 9110 DEEP | 9111 DARK | 9016/R | 9016/SQ |
|----------------------|--------------------|--------------------|--------------------|--------------------|
| Max Input (mA) | 350 / 500 / 700 DC |
| Source Power (W) | 1,05 / 1,5 / 2,1 | 1,05 / 1,5 / 2,1 | 1,05 / 1,5 / 2,1 | 1,05 / 1,5 / 2,1 |
| Lumen Source (lm) | 140 / 200 / 280 | 140 / 200 / 280 | 140 / 200 / 280 | 140 / 200 / 280 |
| Lumen Luminaire (lm) | 112 / 162 / 224 | 112 / 162 / 224 | 56 / 81 / 112 | 56 / 81 / 112 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 |
| Beams | 14°, 28°, 44° | 14° | 120° | 120° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 42 | 32 | 33 | 33 |
| Weight (kg) | 0,08 | 0,06 | 0,04 | 0,04 |

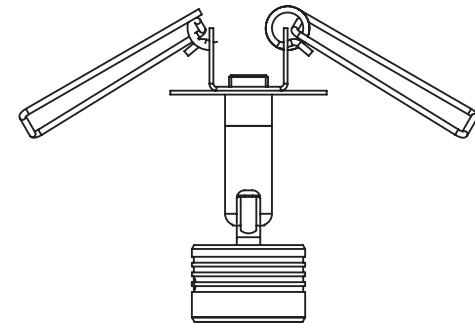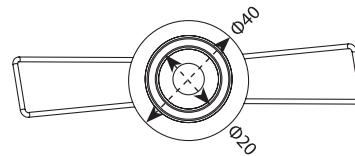

Starlight Semi-recessed



01
03
26
22

- Indoor wall/ceiling semi-recessed LED spotlight.
- Flat Base in Metal Sheet.
- Galvanized springs.
- Body made of machined aluminium to optimize heat dissipation.
- Brass chrome plated fixing joint included that allows setting the orientation of the spot.
- Tiltable: 90°.
- No visible cables, as they are running through the joint.
- Nichia LED mounted on metal core PCB (MCPCB) 2700K, 3000K, 4000K.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.

| CODE | 9012 |
|----------------------|------------------------------|
| Max Input (mA) | 700 DC |
| Source Power (W) | 2,1 |
| Lumen Source (lm) | 280 |
| Lumen Luminaire (lm) | 224 |
| CCT (K) | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 |
| Cut Out Ø (mm) | 30 |
| Weight (kg) | 0,19 |



164



○ ○ ○ | OPAL | ○ ○ ○ Can be combined with
Kanali 40 Deep



Starlight Linear

01 03 26



- Indoor recessed linear LED luminaire.
- Body made of extruded aluminium electrostatically polyester powder coated, combination of different colours in frame or inner cover on request.
- Three different sizes as standard.
- Each LED insert contains one Nichia LED mounted on metal core PCB (MCPCB) 2700K, 3000K, 4000K.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- CRI 90 available upon request.
- LED driver to be ordered separately.

Starlight linear can be combined with KANALI 40 DEEP (see page 052)

| CODE | 1010.2 | 1010.3 | 1011.3 | 1011.5 | 1012.6 | 1012.9 |
|----------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Max Input (mA) | 700 DC |
| Source Power (W) | 2 x 2,1 | 3 x 2,1 | 3 x 2,1 | 5 x 2,1 | 6 x 2,1 | 9 x 2,1 |
| Lumen Source (lm) | 560 | 840 | 840 | 1400 | 1680 | 2520 |
| Lumen Luminaire (lm) | 448 | 672 | 672 | 1120 | 1344 | 2016 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |
| Beams | 14°,28°,44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Length (mm) | 108 | 108 | 158 | 158 | 308 | 308 |
| Length (mm) | 114 | 114 | 164 | 164 | 314 | 314 |
| Weight (kg) | 0,1 | 0,1 | 0,15 | 0,15 | 0,29 | 0,29 |

GALLIS

www.gallis.gr





Mini Gnomon

01 03 26

- Indoor recessed LED downlight.
- Full luminaire made of high quality diecast aluminium.
- Electrostatic polyester powder coated in white, black or grey.
- Glued polycarbonate protection window and galvanized springs.
- Based on Bridgelux V6 LED.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 500mA.

| CODE | 9161 | 9161 |
|----------------------|-----------|-----------|
| Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 3,2 | 4,7 |
| Lumen Source (lm) | 400/426 | 542/577 |
| Lumen Luminaire (lm) | 320/341 | 434/462 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 60° | 60° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 34 | 34 |
| Weight (Kg) | 0,15 | 0,15 |





Gnomon

01 03 26

- Indoor recessed LED downlight.
- Full luminaire made of high quality diecast aluminium.
- Electrostatic polyester powder coated in white, black or grey.
- Glued polycarbonate protection window and stainless steel springs.
- Based on Bridgelux V8 LED.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 500mA.

| CODE | 9160 | 9160 |
|----------------------|-----------|-----------|
| Max Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 6,1 | 8,9 |
| Lumen Source (lm) | 908/945 | 1261/1311 |
| Lumen Luminaire (lm) | 726/756 | 1009/1049 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 90° | 90° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 60 | 60 |
| Weight (kg) | 0,18 | 0,18 |

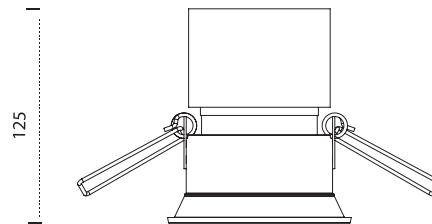
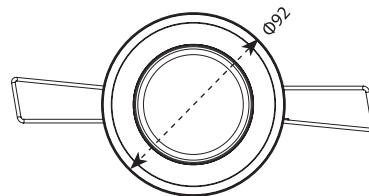


Virgo Round

01

- Indoor ceiling recessed LED downlight.
- Body made of diecast aluminium electrostatically polyester powder coated white.
- Very small trim, 4mm visible, known as "semi-trimless".
- Deep aluminium trim works as secondary reflector, with a "dark light" effect.
- Clear protection glass.
- Based on Bridgelux V10 COB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat dissipation.
- Reflector made of aluminium coated PC with protective lacquer.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 350mA.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 9165R | 9165R |
|----------------------|-----------|-----------|
| Max Input (mA) | 250 DC | 350 DC |
| Source Power (W) | 8,7 | 12,6 |
| Lumen Source (lm) | 1323/1363 | 1811/1865 |
| Lumen Luminaire (lm) | 1058/1091 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 14°, 40° | 14°, 40° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 82 | 82 |
| Weight (Kg) | 0,32 | 0,32 |




Virgo Square

(01)


- Indoor ceiling recessed LED downlight.
- Body made of diecast aluminium electrostatically polyester powder coated white.
- Very small trim, 4mm visible, known as "semi-trimless".
- Deep aluminium trim works as secondary reflector, with a "dark light" effect.
- Clear protection glass. - Based on Bridgelux V10 COB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat dissipation.
- Reflector made of aluminium coated PC with protective lacquer.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 350mA.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 9165SQ | 9165SQ |
|----------------------|-----------|-----------|
| Max Input (mA) | 250 DC | 350 DC |
| Source Power (W) | 8,7 | 12,6 |
| Lumen Source (lm) | 1323/1363 | 1811/1865 |
| Lumen Luminaire (lm) | 1058/1091 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 14°, 40° | 14°, 40° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 74 x 74 | 74 x 74 |
| Weight (kg) | 0,32 | 0,32 |

www.gallis.gr



88



Mini Virgo Round

01
03
26

- Indoor recessed LED downlight.
- Full luminaire made of high quality diecast aluminium.
- Electrostatic polyester powder coated.
- Clear Polycarbonate protection window and stainless steel springs.
- Based on Bridgelux V8 LED.
- Available in 2700, 3000, 4000K
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.

| CODE | 9164 | 9164 |
|----------------------|----------------|----------------|
| Max Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 6,1 | 8,9 |
| Lumen Source (lm) | 908/945 | 1261/1311 |
| Lumen Luminaire (lm) | 726/756 | 1009/1049 |
| CCT (K) | 2700/3000/4000 | 2700/3000/4000 |
| Beams | 20°, 38°, 60° | 20°, 38°, 60° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 51 | 51 |
| Weight (Kg) | 0,18 | 0,18 |



RECESSED DOWNLIGHTS



Easy





01

- Indoor or outdoor recessed LED downlight.
- Luminaire housing with ceiling trim in diecast aluminium electrostatically polyester powder coated white.
- Other colours available upon request.
- Luminaire heat sink in diecast aluminium.
- Based on Bridgelux V13 LED.
- Anodized Pure Aluminium-Dip coated LED reflector.
- For ceiling thickness from 8mm to 18mm.
- CRI 90 available upon request.
- Luminaire lifetime > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 2608 | 2608 |
|----------------------|-----------|-----------|
| Max Input (mA) | 500 DC | 700 DC |
| Source Power (W) | 17,5 | 25,3 |
| Lumen Source (lm) | 2658/2764 | 3600/3744 |
| Lumen Luminaire (lm) | 2126/2211 | 2880/2995 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 80° | 80° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 215 | 215 |
| Weight (kg) | 1,01 | 1,01 |

 **GALLIS**
LIGHTING

www.gallis.gr




Pin Hole Round / Square

01 03 26

- Indoor adjustable recessed LED downlight.
- Body made of diecast aluminium electrostatically polyester powder coated.
- "Dark light" effect.
- Clear protection polycarbonate diffuser.
- Based on Bridgelux V10 COB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat dissipation.
- Reflector made of aluminium coated PC with protective lacquer.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 2905R | 2905SQ |
|----------------------|-----------|-----------|
| Max Input (mA) | 250 DC | 250 DC |
| Source Power (W) | 8,7 | 8,7 |
| Lumen Source (lm) | 1323/1363 | 1323/1363 |
| Lumen Luminaire (lm) | 1058/1091 | 1058/1091 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 40° | 40° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 85 | 85 x 85 |
| Weight (kg) | 0,33 | 0,35 |

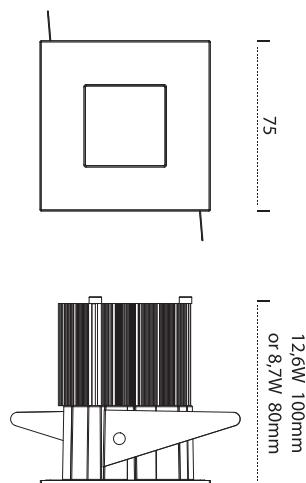

Carre

01 03 26 50






- Interior multi purpose recessed LED downlight.
- Luminaires housing with ceiling trim in diecast aluminium in electrostatically polyester powder coated or chrome plated.
- Luminaires heat sink made of extruded aluminium.
- Clear glued protection glass and silicone ring.
- Frosted glass available on demand.
- Based on Bridgelux V10 COB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat dissipation.
- Reflector made of aluminium coated PC with protective lacquer.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 9070 | 9071 | 9072 | 9073 | 9074 | 9075 |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Max Input (mA) | 250 DC | 250 DC | 250 DC | 350 DC | 350 DC | 350 DC |
| Source Power (W) | 8,7 | 8,7 | 8,7 | 12,6 | 12,6 | 12,6 |
| Lumen Source (lm) | 1323/1363 | 1323/1363 | 1323/1363 | 1811/1865 | 1811/1865 | 1811/1865 |
| Lumen Luminaire (lm) | 1058/1091 | 1058/1091 | 1058/1091 | 1449/1492 | 1449/1492 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 13° | 28° | 48° | 13° | 28° | 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 60 | 60 | 60 | 60 | 60 | 60 |
| Weight (kg) | 0,32 | 0,32 | 0,32 | 0,34 | 0,34 | 0,34 |



2552

2551



Leo Round

01 03 26 50

- Interior multi purpose recessed LED downlight.
- Luminaire housing with ceiling trim in diecast aluminium electrostatically polyester powder coated.
- Luminaire heat sink made of extruded aluminium.
- Clear glued protection glass and silicone ring.
- Frosted glass available on demand.
- Based on Bridgelux V10 COB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat dissipation.
- Reflector made of aluminium coated PC with protective lacquer.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 9001 | 9002 | 9003 | 9031 | 9034 | 9036 |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Max Input (mA) | 250 DC | 250 DC | 250 DC | 350 DC | 350 DC | 350 DC |
| Source Power (W) | 8,7 | 8,7 | 8,7 | 12,6 | 12,6 | 12,6 |
| Lumen Source (lm) | 1323/1363 | 1323/1363 | 1323/1363 | 1811/1865 | 1811/1865 | 1811/1865 |
| Lumen Luminaire (lm) | 1058/1091 | 1058/1091 | 1058/1091 | 1449/1492 | 1449/1492 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 13° | 28° | 48° | 13° | 28° | 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 60 | 60 | 60 | 60 | 60 | 60 |
| Weight (kg) | 0,3 | 0,3 | 0,3 | 0,32 | 0,32 | 0,32 |

| CODE ACCESSORIES | 2551 ROUND | 2552 SQUARE |
|---------------------|------------|-------------|
| Cut Out Ø (mm) | 130 x 130 | 130 x 130 |
| Weight (kg) | 0,15 | 0,15 |
| Type | Gypsum | Gypsum |





Leo Square

01 03 26 50

- Interior multi purpose recessed LED downlight.
- Luminaire housing with ceiling trim in diecast aluminium electrostatically polyester powder coated.
- Luminaire heat sink made of extruded aluminium.
- Clear glued protection glass and silicone ring.
- Frosted glass available on demand.
- Based on Bridgelux V10 COB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat dissipation.
- Reflector made of aluminium coated PC with protective lacquer.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 9005 | 9006 | 9007 | 9032 | 9035 | 9037 |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Max Input (mA) | 250 DC | 250 DC | 250 DC | 350 DC | 350 DC | 350 DC |
| Source Power (W) | 8,7 | 8,7 | 8,7 | 12,6 | 12,6 | 12,6 |
| Lumen Source (lm) | 1323/1363 | 1323/1363 | 1323/1363 | 1811/1865 | 1811/1865 | 1811/1865 |
| Lumen Luminaire (lm) | 1058/1091 | 1058/1091 | 1058/1091 | 1449/1492 | 1449/1492 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 13° | 28° | 48° | 13° | 28° | 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 60 | 60 | 60 | 60 | 60 | 60 |
| Weight (kg) | 0,31 | 0,31 | 0,31 | 0,33 | 0,33 | 0,32 |

RECESSED DOWNLIGHTS





Virgin Dark

01 03 26

- Indoor recessed LED downlight.
- Full luminaire made of high quality diecast aluminium.
- Electrostatic polyester powder coated.
- Polycarbonate protection screen.
- Stainless Steel Springs.
- Based on Bridgelux V8 LED.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 500mA.

| CODE | 9198 | 9198 |
|----------------------|-----------|-----------|
| Max Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 6,1 | 8,9 |
| Lumen Source (lm) | 908/945 | 1261/1311 |
| Lumen Luminaire (lm) | 726/756 | 1009/1049 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 38° | 38° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 80 | 80 |
| Weight (kg) | 0,18 | 0,18 |

RECESSED DOWNLIGHTS



Virgin Adjustable


01 03 26

- Interior multi purpose recessed adjustable LED downlight.
- Full luminaire made of high quality diecast aluminium.
- Electrostatic polyester powder coated.
- Polycarbonate protection screen.
- Stainless Steel Springs.
- Based on Bridgelux V8 LED.
- CRI 90% available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 500mA.

| CODE | 9199 | 9199 |
|----------------------|-----------|-----------|
| Max Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 6,1 | 8,9 |
| Lumen Source (lm) | 908/945 | 1261/1311 |
| Lumen Luminaire (lm) | 726/756 | 1009/1049 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 38° | 38° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 76 | 76 |
| Weight (kg) | 0,18 | 0,18 |

 **GALLIS**
LIGHTING

www.gallis.gr




Trimless

Virgin Adjustable Double

01
03
26

- Interior multi purpose recessed adjustable LED downlight in standard and trimless versions.
- Housing made of steel sheet and diecast aluminium.
- Electrostatic polyester powder coated.
- Polycarbonate protection screen.
- Stainless Steel Springs.
- Based on Bridgelux V8 LED.
- CRI 90% available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 500mA/spot.

| CODE | 9199/2 | 9199/2 | 9199/2T | 9199/2T |
|----------------------|-------------|---------------|-------------|---------------|
| Max Input (mA) | 2 x 350 DC | 2 x 500 DC | 2 x 350 DC | 2 x 500 DC |
| Source Power (W) | 2 x 6,1 | 2 x 8,9 | 2 x 6,1 | 2 x 8,9 |
| Lumen Source (lm) | 2 x 908/945 | 2 x 261/1311 | 2 x 908/945 | 2 x 261/1311 |
| Lumen Luminaire (lm) | 2 x 726/756 | 2 x 1009/1049 | 2 x 726/756 | 2 x 1009/1049 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 38° | 38° | 38° | 38° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 250 x 130 | 250 x 130 | 245 x 128 | 245 x 128 |
| Weight (kg) | 1,1 | 1,1 | 1,1 | 1,1 |

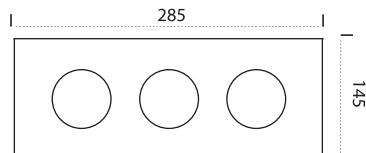

Trimless

Virgin Adjustable Triple


01
03
26

- Interior multi purpose recessed adjustable LED downlight in standard and trimless versions.
- Housing made of steel sheet and diecast aluminium.
- Electrostatic polyester powder coated.
- Polycarbonate protection screen.
- Stainless Steel Springs.
- Based on Bridgelux V8 LED.
- CRI 90% available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 500mA/spot.

| CODE | 9199/3 | 9199/3 | 9199/3T | 9199/3T |
|----------------------|-------------|---------------|-------------|---------------|
| Max Input (mA) | 3 x 350 DC | 3 x 500 DC | 3 x 350 DC | 3 x 500 DC |
| Source Power (W) | 3 x 6,1 | 3 x 8,9 | 3 x 6,1 | 3 x 8,9 |
| Lumen Source (lm) | 3 x 908/945 | 3 x 1261/1311 | 3 x 908/945 | 3 x 1261/1311 |
| Lumen Luminaire (lm) | 3 x 726/756 | 3 x 1009/1049 | 3 x 726/756 | 3 x 1009/1049 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 38° | 38° | 38° | 38° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 370 x 130 | 370 x 130 | 365 x 128 | 365 x 128 |
| Weight (kg) | 1,6 | 1,6 | 1,6 | 1,6 |

GALLIS
LIGHTING

www.gallis.gr

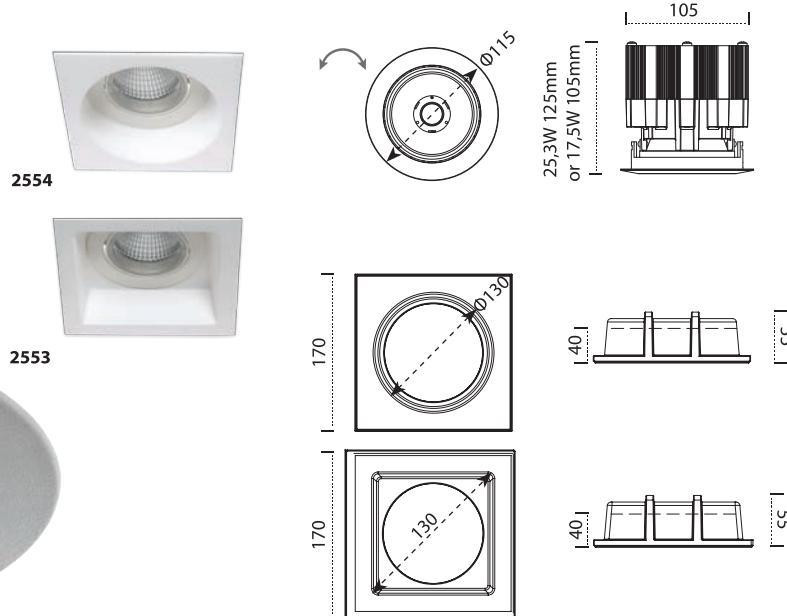


Asterion LED

01 03 26

- Indoor multipurpose recessed adjustable LED downlight.
- Luminaire housing with ceiling trim in diecast aluminium electrostatically polyester powder coated.
- Tilttable +/-15deg.
- Luminaire heat sink in extruded aluminium.
- Clear protection glass.
- Based on Bridgelux V13 LED.
- Alunova® LED reflector.
- For ceiling thickness from 8mm to 18mm.
- CRI 90 available upon request.
- Luminaire lifetime > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.

| CODE | 9171 | 9172 | 9173 | 9175 | 9176 | 9177 |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Max Input (mA) | 500 DC | 500 DC | 500 DC | 700 DC | 700 DC | 700 DC |
| Source Power (W) | 17,5 | 17,5 | 17,5 | 25,3 | 25,3 | 25,3 |
| Lumen Source (lm) | 2658/2764 | 2658/2764 | 2658/2764 | 3600/3744 | 3600/3744 | 3600/3744 |
| Lumen Luminaire (lm) | 2126/2211 | 2126/2211 | 2126/2211 | 2880/2995 | 2880/2995 | 2880/2995 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 16° | 24° | 41° | 16° | 24° | 41° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 106 | 106 | 106 | 106 | 106 | 106 |
| Weight (kg) | 0,7 | 0,7 | 0,7 | 0,9 | 0,9 | 0,9 |

| CODE | 2553 SQUARE | 2554 ROUND |
|----------------|-------------|------------|
| ACCESSORIES | | |
| Cut Out Ø (mm) | 170 x 170 | 170 x 170 |
| Weight (kg) | 0,15 | 0,15 |
| Type | Gypsum | Gypsum |

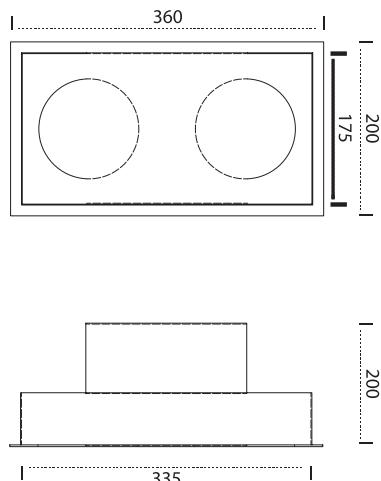

Asterion Double LED

01 03 26

- Indoor multipurpose recessed adjustable LED downlight.
- Luminaire housing made of steel sheet electrostatically powder coated.
- Spot made of aluminium electrostaticly polyester powder coated.
- Tilttable +/-15deg.
- Luminaire heat sink in extruded aluminium.
- Clear protection glass.
- Based on Bridgelux V13 LED.
- Alunova® LED reflector.
- For ceiling thickness from 8mm to 18mm.
- CRI 90 available upon request.
- Luminaire lifetime > 50,000 hours at 70% luminous flux.
- LED driver included.

| CODE | 9178 | 9179 |
|----------------------|-------------|-------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 35 | 50,6 |
| System Power (W) | 36,8 | 53,1 |
| Lumen Source (lm) | 5316/5528 | 7200/7488 |
| Lumen Luminaire (lm) | 4252/4422 | 5760/5990 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 16°,24°,41° | 16°,24°,41° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 335 x 175 | 335 x 175 |
| Weight (kg) | 4,1 | 4,1 |




Mini Asterion LED

01
03
26

- Interior multi purpose recessed adjustable LED downlight.
- Luminaire housing with ceiling trim in diecast aluminium in electrostatic polyester powder coating.
- Luminaire heat sink made of extruded aluminium.
- Clear glued protection glass.
- Frosted glass available on demand.
- Tilttable +/-15deg.
- Based on Bridgelux V10 COB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat dissipation.
- Reflector made of aluminium coated PC with protective lacquer.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- MAX Input 350mA.

| CODE | 9168 | 9168 |
|----------------------|-----------|-----------|
| Max Input (mA) | 250 DC | 350 DC |
| Source Power (W) | 8,7 | 12,6 |
| Lumen Source (lm) | 1323/1363 | 1811/1865 |
| Lumen Luminaire (lm) | 1058/1091 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 14°, 40° | 14°, 40° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 75 | 75 |
| Weight (kg) | 0,32 | 0,32 |


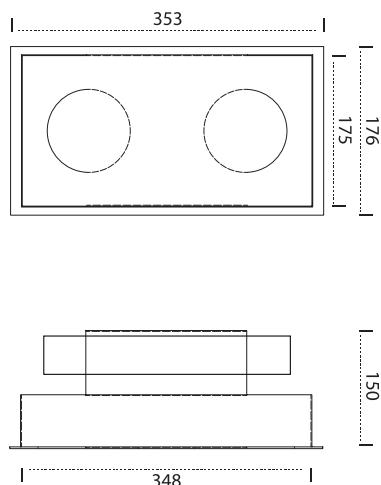


Mini Asterion Double LED

01 03 26

- Indoor multipurpose recessed adjustable LED downlight.
- Luminaire housing made of steel sheet electrostatically powder coated.
- Spot made of aluminium electrostaticly polyester powder coated.
- Tilttable +/-15deg.
- Luminaire heat sink in extruded aluminium.
- Clear protection glass.
- Based on Bridgelux V10 LED.
- Alunova® LED reflector.
- For ceiling thickness from 8mm to 18mm.
- CRI 90 available upon request.
- Luminaire lifetime > 50,000 hours at 70% luminous flux.
- LED driver included.

| CODE | 9184 | 9185 |
|----------------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 17,4 | 25,2 |
| System Power (W) | 18,3 | 26,5 |
| Lumen Source (lm) | 2646/2726 | 3622/3730 |
| Lumen Luminaire (lm) | 2116/2182 | 2898/2984 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 16°, 24°, 41° | 16°, 24°, 41° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 335 x 175 | 335 x 175 |
| Weight (kg) | 2,7 | 2,7 |





Dynamic LED

01

03

- Indoor ceiling recessed fully adjustable LED downlight.
- All elements made of diecast aluminium electrostatically polyester powder coated.
- Tilttable : 35° - Rotation 360°.
- Extruded aluminium passive cooling system black anodized for optimal heat dissipation.
- Tridonic LED COB LES15.
- Clear protection glass. Stainless steel springs.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 2101 | 2101 | 2101 | 2101 |
|----------------------|-----------|-----------|-----------|-----------|
| Max Input (mA) | 500 DC | 700 DC | 900 DC | 1050 DC |
| Source Power (W) | 17,5 | 24,5 | 31,5 | 37,4 |
| Lumen Source (lm) | 2960/3060 | 4020/4140 | 5080/5250 | 5815/5970 |
| Lumen Luminaire (lm) | 2368/2448 | 3216/3312 | 4064/4176 | 4652/4776 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 25°, 60° | 25°, 60° | 25°, 60° | 25°, 60° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 145 | 145 | 145 | 145 |
| Weight (kg) | 0,72 | 0,72 | 0,72 | 0,72 |





Vivo Adjustable

01 03 26

- Indoor ceiling recessed fully adjustable LED downlight.
- All elements made of die cast aluminium, electrostatically polyester powder coated.
- Tilttable : 36° - Rotation 350°.
- Extruded aluminium passive cooling system black anodized for optimal heat dissipation.
- No moving parts.
- Equipped with TRIDONIC LED module.
- Polished anodized aluminium reflector, optimized for Zhaga book 3 LED modules.
- Clear protection glass. Stainless steel springs.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 3450 | 3450 | 3450 | 3451 |
|----------------------|-----------|-----------|-----------|-----------|
| Max Input (mA) | 500 DC | 700 DC | 900 DC | 1050 DC |
| Source Power (W) | 17 | 25 | 33 | 38 |
| Lumen Source (lm) | 2730/2840 | 3630/3780 | 4530/4720 | 5620/5730 |
| Lumen Luminaire (lm) | 2185/2280 | 2910/3030 | 3630/3780 | 4500/4590 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 24°, 55° | 24°, 55° | 24°, 55° | 24°, 55° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 160 | 160 | 160 | 160 |
| Weight (kg) | 0,96 | 0,96 | 0,96 | 0,96 |





Tholos LED

01
03
26

- Indoor and outdoor ceiling recessed LED downlight.
- Full luminaire made of high quality diecast aluminium.
- Front Ring electrostaticly polyester powder coated.
- Polycarbonate textured diffuser screen and silicone ring.
- Galvanized steel springs.
- Uses Samsung LEDs. Driven at maximum 700mA.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 80% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 6230 | 6231 | 6232 |
|----------------------|-----------|-----------|-----------|
| Max Input (mA) | 700 DC | 700 DC | 700 DC |
| Source Power (W) | 16 | 25 | 33 |
| Lumen Source (lm) | 2056/2139 | 3063/3185 | 4086/4250 |
| Lumen Luminaire (lm) | 1645/1711 | 2450/2548 | 3629/3400 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 90° | 90° | 90° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 165 | 165 | 165 |
| Weight (kg) | 0,66 | 0,66 | 0,66 |



Tholos LED SQ



01 03 26

- Indoor and outdoor ceiling recessed LED downlight.
- Full luminaire made of high quality diecast aluminium.
- Front frame electrostatically polyester powder coated.
- Polycarbonate textured diffuser screen and silicone ring.
- Galvanized steel springs.
- Equipped with Tridonic CLE LED 3000K, 4000K.
- CRI 90 available upon request.
- Luminaire life time > 50,000 hours at 80% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 6231SQ | 6231SQ | 6231SQ |
|----------------------|-----------|-----------|-----------|
| Max Input (mA) | 350 DC | 500 DC | 700 DC |
| Source Power (W) | 12 | 18 | 25 |
| Lumen Source (lm) | 1530 | 2166 | 3060 |
| Lumen Luminaire (lm) | 1117 | 1581 | 2234 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 120° | 120° | 120° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 190 x 190 | 190 x 190 | 190 x 190 |
| Weight (kg) | 0,66 | 0,66 | 0,66 |

 **GALLIS**
LIGHTING

www.gallis.gr





Faros

01

- Indoor or outdoor recessed LED downlight.
- Luminaire housing with ceiling trim in diecast aluminium electrostatically polyester powder coated white.
- Other colours available upon request.
- Luminaire heat sink in die cast aluminium.
- Based on Bridgelux V13 LED.
- Anodized Pure Aluminium-Dip coated LED reflector.
- For ceiling thickness from 8mm to 18mm.
- CRI 90 available upon request.
- Luminaire lifetime > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 2607 | 2607 |
|----------------------|-----------|-----------|
| Max Input (mA) | 500 DC | 700 DC |
| Source Power (W) | 17,5 | 25,3 |
| Lumen Source (lm) | 2658/2764 | 3600/3744 |
| Lumen Luminaire (lm) | 2126/2211 | 2880/2995 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 60° | 60° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 140 | 140 |
| Weight (kg) | 0,76 | 0,76 |





Midi Faros

01

- Indoor or outdoor recessed LED downlight.
- Luminaires housing with ceiling trim in diecast aluminium electrostatically powder coated white. Available upon request in other colours.
- Luminaires heat sink in die cast aluminium.
- Clear glass diffuser.
- Based on Bridgelux V13 LED.
- Anodized Pure Aluminium-Dip coated LED reflector.
- For ceiling thickness from 8mm to 18mm.
- Luminaires lifetime > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 2609 | 2609 |
|----------------------|-----------|-----------|
| Max Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 12,5 | 17 |
| Lumen Source (lm) | 1861/1935 | 2658/2764 |
| Lumen Luminaire (lm) | 1488/1548 | 2126/2211 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 60° | 60° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 100 | 100 |
| Weight (Kg) | 0,375 | 0,375 |




Mini Faros

(01)

- Indoor or outdoor recessed LED downlight.
- Luminaire housing with ceiling trim in diecast aluminium electrostatically polyester powder coated white. Available upon request in other colours.
- Luminaire heat sink in die cast aluminium.
- Clear glass diffuser.
- Based on Bridgelux V8 LED.
- Anodized Pure Aluminium-Dip coated LED reflector.
- For ceiling thickness from 8mm to 18mm.
- Luminaire lifetime > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.
- EMERGENCY VERSION UPON REQUEST.

| CODE | 2606 | 2606 |
|----------------------|-----------|-----------|
| Max Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 6,1 | 8,9 |
| Lumen Source (lm) | 908/945 | 1261/1311 |
| Lumen Luminaire (lm) | 726/756 | 1009/1049 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 40° | 40° |
| CRI | ≥ 80 | ≥ 80 |
| Cut Out Ø (mm) | 75 | 75 |
| Weight (kg) | 0,375 | 0,375 |

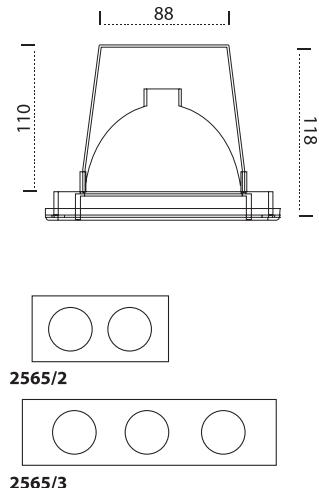

Morfeas LED

01 03 26

- Recessed directional downlight for QR-LP 111 LED lamp.
- Recessed mounting for false ceiling.
- Tilttable 0-45°.
- Mounting plate made of steel sheet powder coated and polycarbonate ring.
- Mounting plates to be ordered separately.
- Range of filters and honey-comb louver to be ordered separately.
- Required spot housing plate: 2563, 2564 or 2565.

CODE **4435**

| | |
|--------------------|---------------|
| Lamp Power Max (W) | 100W |
| Lamp Type | QR-LP 111 LED |
| Diameter (mm) | 145 |

| CODE ACCESSORIES | Dimensions (mm) | Cur Out (mm) |
|-----------------------------------|-----------------|--------------|
| 2580 CERAMIX - Gypsum Plate | 220 x 220 | 220 x 220 |
| 2570 PLATO DUAL - Metal Plate | 170 x 522 | 170 x 522 |
| 2571 PLATO SINGLE - Metal Plate | 170 x 170 | 170 x 170 |
| 2563 PLATO SQUARE - Metal Plate | 250 x 250 | 220 x 220 |
| 2564 PLATO SQUARE - Metal Plate | 165 x 165 | 145 x 145 |
| 2565 PLATO SQUARE - Metal Plate | 200 x 200 | 185 x 185 |
| 2560 PLATO ROUND - Metal Plate | 217 | 190 |
| 2565/2 PLATO SQUARE - Metal Plate | 200 x 420 | 185 x 390 |
| 2565/3 PLATO SQUARE - Metal Plate | 200 x 620 | 185 x 185 |


FOR ACCESSORIES DETAILS SEE PAGE 156



Trimless Downlight

- Round frameless fixed indoor ceiling recessed LED downlight.
- Body made of aluminium, electrostatically polyester powder coated.
- To be supplied with secondary reflector in white color (/WH), black color (/BL), or chrome (/CH).
- Based on Bridgelux V8 COB LED Gen 7 USA.
- Luminaire life time > 50,000 hours at 80% luminous flux.
- LED driver to be ordered separately.

| CODE | 2910 | 2910 |
|----------------------|----------------|----------------|
| Max Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 6,1 | 8,9 |
| Lumen Source (lm) | 727/757/811 | 1009/1051/1126 |
| Lumen Luminaire (lm) | 582/606/649 | 807/841/901 |
| CCT (K) | 2700/3000/4000 | 2700/3000/4000 |
| Beams | 38° | 38° |
| CRI | 90 | 90 |
| Dimension (mm) | Ø85 x H105 | Ø85 x H105 |
| Weight (kg) | 0,25 | 0,25 |

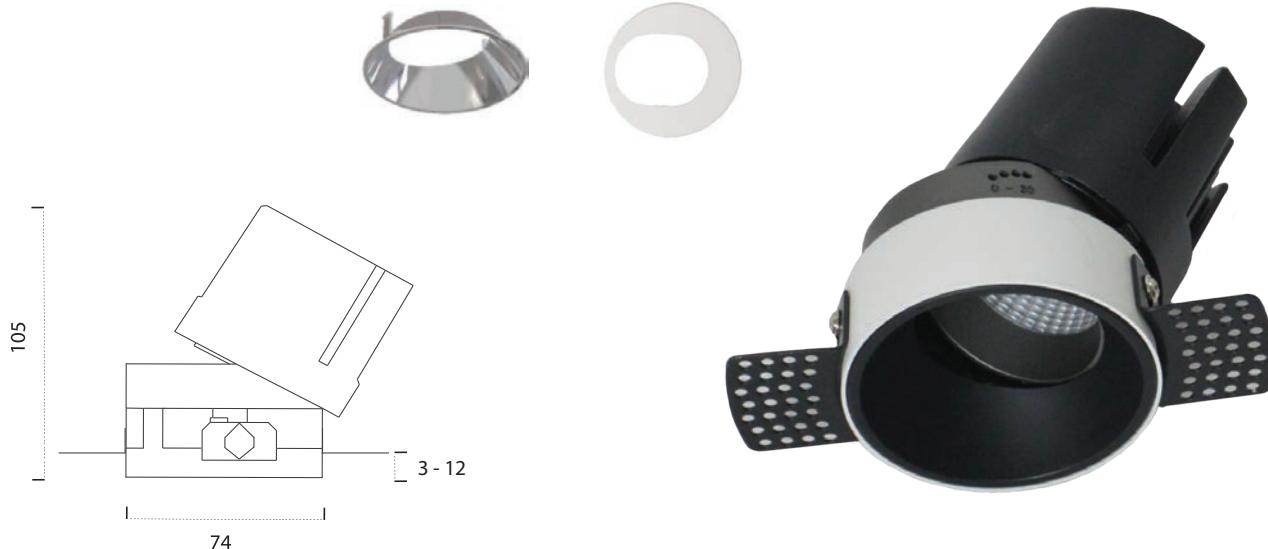

Trimless Adjustable

- Round frameless fixed indoor ceiling recessed LED downlight.
- Body made of aluminium, electrostatically polyester powder coated.
- To be supplied with secondary reflector in white color (/WH), black color (/BL), or chrome (/CH).
- Based on Bridgelux V8 COB LED Gen 7 USA.
- Luminaire life time > 50,000 hours at 80% luminous flux.
- LED driver to be ordered separately.



| CODE | 2911 | 2911 |
|----------------------|----------------|----------------|
| Max Input (mA) | 350 DC | 500 DC |
| Source Power (W) | 6,1 | 8,9 |
| Lumen Source (lm) | 727/757/811 | 1009/1051/1126 |
| Lumen Luminaire (lm) | 582/606/649 | 807/841/901 |
| CCT (K) | 2700/3000/4000 | 2700/3000/4000 |
| Beams | 38° | 38° |
| CRI | 90 | 90 |
| Dimension (mm) | Ø85 x H105 | Ø85 x H105 |
| Weight (Kg) | 0,25 | 0,25 |



PL-6060-BL Backlit Panel

- Square recessed backlit luminaire made of cold rolled steel.
- White epoxy polyester powder coating.
- SMD 2835 LED.
- No LGP, never yellowing.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Non dimmable LED driver included.
- Other driver options available.



| CODE | PL-6060-BL |
|----------------------|----------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Power (W) | 40W |
| Lumen Luminaire (lm) | 4800 |
| CCT (K) | 4000 |
| CRI | ≥ 80 |
| UGR | < 22 |
| Dimension (mm) | 595 x 595 x 30 |
| Weight (kg) | 1,70 |



Point 01

- Indoor ceiling recessed LED downlight.
- Body made of die-cast aluminium electrostatically polyester powder coated.
- Clear protection polycarbonate diffuser.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver to be ordered separately.

| CODE | POINT |
|----------------------|--------|
| Max Input (mA) | 350 DC |
| Source Power (W) | 1 |
| Lumen Source (lm) | 120 |
| Lumen Luminaire (lm) | 100 |
| CCT (K) | 3000 |
| CRI | ≥ 80 |
| Cut Out Ø (mm) | 13 |
| Weight (Kg) | 0,04 |





01

Virgo Round GU10

- Indoor ceiling recessed mounted adjustable downlight, for GU10 lamp.
- Body made of diecast aluminium electrostatically polyester powder coated white.
- Very small trim, 5mm visible, known as "senni-trimless".
- Deep metallic trim works as secondary reflector, with a "dark light" effect.
- Tiltable +/-20°.
- Other colours available upon request.

| CODE | 9166R |
|------------------|---------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Cut Out Ø (mm) | 85 |



01


Virgo Square GU10

- Indoor ceiling recessed mounted downlight, for GU10 lamp.
- Body made of diecast aluminium electrostatically polyester powder coated white.
- Very small trim, 6mm visible, known as "semi-trimless".
- Deep metallic trim works as secondary reflector, with a "dark light" effect.
- Other colours available upon request.

| CODE | 9167SQ |
|------------------|---------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Cut Out Ø (mm) | 78 x 78 |



RECESSED DOWNLIGHTS




2005

01 03

- Fixed downlights made from diecast aluminium.
- Lampholders GU10 or Gx5,3 available for MR 16 lamps 12 Volts, LED or Fluorescent lamps.
- Colors available white/chrome, white/gold, black/black.

| CODE | 2005 |
|------------------|---------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Cut Out Ø (mm) | 70 |



2006

01 50



- Recessed fixed downlights made from diecast aluminium.
- Lampholders GU10 or Gx5,3 available for MR 16 lamps 12 Volts, LED or Fluorescent lamps.
- Frosted glass cover and silicone ceiling gasket.

| CODE | 2006 |
|------------------|---------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Lamp Power (W) | 50 |
| Lampholder | GU10 |
| Cut Out Ø (mm) | 70 |

 **GALLIS**
LIGHTING

www.gallis.gr

RECESSED DOWNLIGHTS

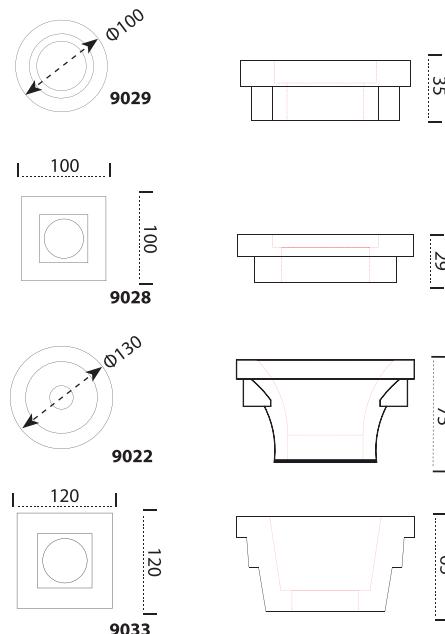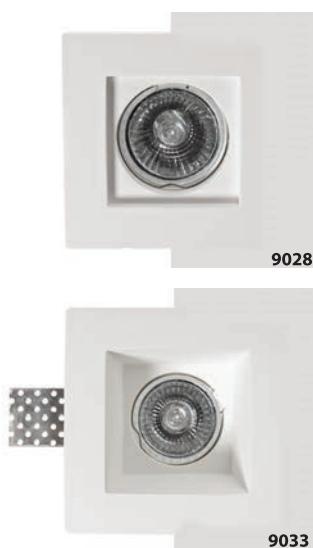

Ceramix

- Recessed frameless spotlight for GU10 type lamps.
- Installation on plasterboard ceiling.
- Made of gypsum material.

| CODE | 9022 | 9033 | 9029 | 9028 |
|------------------|---------|-----------|---------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Lamp Power (W) | 50 | 50 | 50 | 50 |
| Lampholder | GU10 | GU10 | GU10 | GU10 |
| Cut Out Ø (mm) | 130 | 120 x 120 | 100 | 100 x 100 |






Tracks and Wall light

pages 112 - 123

04

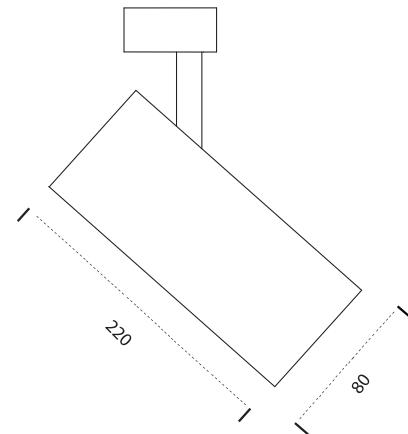


Pictor LED

01

- Indoor track LED spotlight.
- Clear protection glass, silicon rubber gaskets and stainless steel screws.
- 3-circuit track adaptor.
- Alunova® LED reflector with spherical faces.
- Aluminium parts electrostatically polyester powder coated in white.
- Passive cooling.
- Spotlight rotatable 350° head tiltable 0-90°.
- CRI 90.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 2197 |
|----------------------|-------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Source Power (W) | 22 |
| System Power (W) | 25 |
| Lumen Source (lm) | 3015/3195 |
| Lumen Luminaire (lm) | 2110/2235 |
| CCT (K) | 3000/4000 |
| Beams | 40° |
| CRI | >90 |
| Weight (kg) | 1,45 |




Prinos LED

01

- Indoor track LED spotlight.
- Clear protection glass, silicon rubber gaskets and stainless steel screws.
- 3-circuit track adaptor.
- Bridgelux V15 LED COB and Philips driver included.
- Alunova® LED reflector with spherical faces.
- Aluminium parts electrostatically polyester powder coated in white.
- Passive cooling.
- Spotlight rotatable 350° head tilttable 0-90°.
- CRI 90 upon request.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 2191 |
|----------------------|-------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Source Power (W) | 33 |
| System Power (W) | 35 |
| Lumen Source (lm) | 4125/4290 |
| Lumen Luminaire (lm) | 2700/2800 |
| CCT (K) | 3000/4000 |
| Beams | 40° |
| CRI | ≥ 80 |
| Weight (kg) | 1,45 |

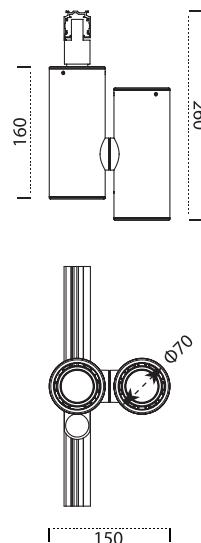

Cylinder 7-A3 Mono


01 03 26

- Indoor Led spotlight. Body made of extruded aluminium and diecast parts.
- Galvanised metal internal elements.
- Clear glued protection glass.
- Reflector made of aluminium coated Polycarbonate with protective lacquer.
- Based on Bridgelux V10 LED.
- CRI 90 available upon request.
- Phase cut dimmable LED driver (made in Europe) included as standard, other drivers / dimming possibilities available on request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Also available in surface version (wall / ceiling).

| CODE | 1118/13° | 1118/28° | 1118/48° |
|----------------------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,6 | 12,6 | 12,6 |
| System Power (W) | 13,2 | 13,2 | 13,2 |
| Lumen Source (lm) | 1811/1865 | 1811/1865 | 1811/1865 |
| Lumen Luminaire (lm) | 1449/1492 | 1449/1492 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 13° | 28° | 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (Kg) | 1,15 | 1,15 | 1,15 |



TRACKS AND WALL LIGHT

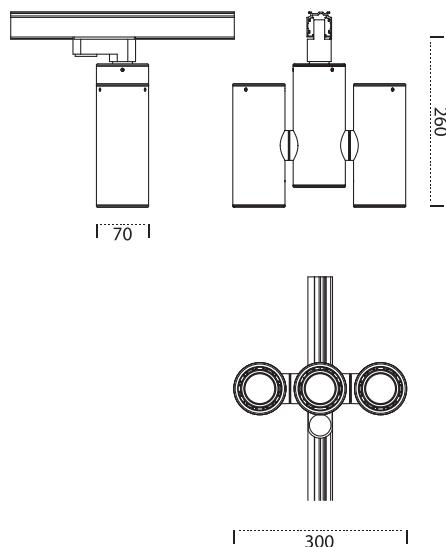

Cylinder 7-A3 Double


01 03 26

- Indoor Led spotlight. Body made of extruded aluminium and diecast parts.
- Galvanised metal internal elements.
- Clear glued protection glass.
- Reflector made of aluminium coated Polycarbonate with protective lacquer.
- Based on Bridgelux V10 LED.
- CRI 90 available upon request.
- Phase cut dimmable LED driver (made in Europe) included as standard, other drivers / dimming possibilities available on request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Also available in surface version (wall / ceiling).

| CODE | 1119/13° | 1119/28° | 1119/48° |
|----------------------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 2 x 12,6 | 2 x 12,6 | 2 x 12,6 |
| System Power (W) | 2 x 13,2 | 2 x 13,2 | 2 x 13,2 |
| Lumen Source (lm) | 1811/1865 | 1811/1865 | 1811/1865 |
| Lumen Luminaire (lm) | 1449/1492 | 1449/1492 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 13° | 28° | 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 1,25 | 1,25 | 1,25 |

 **GALLIS**
LIGHTING

www.gallis.gr

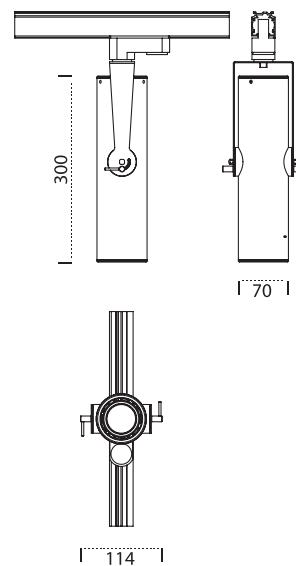

Cylinder 7-A3 One Tube


01
03
26

- Indoor Led spotlight. Body made of extruded aluminium and diecast parts.
- Galvanised metal internal elements.
- Clear glued protection glass.
- Reflector made of aluminium coated Polycarbonate with protective lacquer.
- Based on Bridgelux V10 LED.
- CRI 90 available upon request.
- Phase cut dimmable LED driver (made in Europe) included as standard, other drivers / dimming possibilities available on request.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Also available in surface version (wall / ceiling).

| CODE | 1113/13° | 1113/28° | 1113/48° |
|----------------------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 12,6 | 12,6 | 12,6 |
| System Power (W) | 13,2 | 13,2 | 13,2 |
| Lumen Source (lm) | 1811/1865 | 1811/1865 | 1811/1865 |
| Lumen Luminaire (lm) | 1449/1492 | 1449/1492 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 13° | 28° | 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 1,1 | 1,1 | 1,1 |



TRACKS AND WALL LIGHT



1129W




1129A3

1129

01 03

- Spotlight for ceiling(W) or 3-circuit track(A3).
- Body made of aluminium powder coated.
- Spotlight rotatable 360°, tiltable 0-90°.

| CODE | 1129W | 1129A3 |
|------------------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Lamp Power (W) | 50 | 50 |
| Lampholder | GU10 | GU10 |
| Dimension (mm) | Ø60 x 160 | Ø60 x 160 |

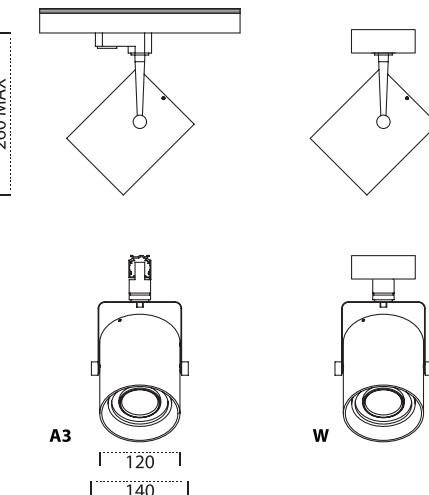

Cylinder 12 Track


01
03
26

- Indoor wall or track mounted spotlight for AR111, G53 base or Par30, E27base LED lamps.
- AR111, G53 base includes a non dimmable 20W 12VDC LED driver to cover all needs of 12V G53 base LED lamps.
- Available in track version (-A3) and wall mounted with base version (-W).
- Body made of extruded and diecast aluminium electrostatically polyester powder coated.
- Steel sheet arm painted same color as the body.
- Chrome plated brass hand screws for tool free adjustment.

| CODE | 1131/A3 or W | 1120/A3 or W |
|------------------|--------------|--------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Lamp Type | PAR30-E27 | AR111-G53 |
| Weight (Kg) | 1,45 | 1,45 |



TRACKS AND WALL LIGHT

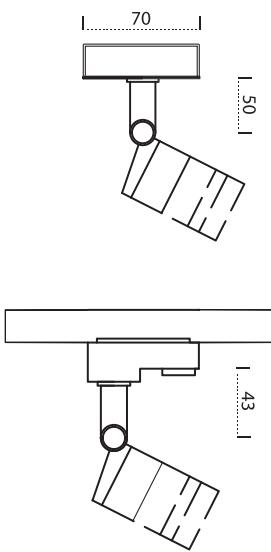

4153

4150

Polyspot

01 03 26





- Spotlight for halogen or LED lamps GU10, PAR, ESD 111.
- 3-circuit track adaptor (A3) or base for wall/ceiling fixation (W).
- Body made of extruded aluminium powder coated, polycarbonate parts and steel sheet base.
- Spotlight rotatable 360° head tiltable 0-90°.

| CODE | 4150 | 4151 | 4152 | 4153 |
|------------------|-----------|-----------|---------|---------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Max Watt (W) | 100 | 50 | 100 | 75 |
| Lamp Type | E27 PAR30 | E27 PAR20 | GZ10 | GU10 |
| Weight (Kg) | 0,25 | 0,25 | 0,20 | 0,20 |

 **GALLIS**
LIGHTING

www.gallis.gr

TRACKS AND WALL LIGHT



Mauro

01 03 26

- Indoor surface mounted LED spotlight
- Spotlight Body made of machined aluminium to optimize heat dissipation.
- Different bases are available. Option for spiral or rod bracket.
- Nichia LED mounted on metal core PCB (MCPCB) 2700K, 3000K, 4000K.
- CRI 90 available upon request
- LED Driver to be ordered separately.
- Luminaire life time > 50,000 hours at 70% luminous flux.





www.gallis.gr

| CODE | 9200 | 9201 | 9202 | 9203 |
|----------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Max Input (mA) | 700 DC | 700 DC | 700 DC | 700 DC |
| Source Power (W) | 2,1 | 2,1 | 2,1 | 2,1 |
| Lumen Source (lm) | 280 | 280 | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 | 224 | 224 |
| CCT (K) | 3000 | 3000 | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,24 | 0,24 | 0,24 | 0,24 |



TRACKS AND WALL LIGHT



Mauro



01 03 26

- Indoor surface mounted LED spotlight.
- Spotlight Body made of machined aluminium to optimize heat dissipation.
- Different bases are available. Option for spiral or rod bracket.
- Nichia LED mounted on metal core PCB (MCPBC) 2700K, 3000K, 4000K.
- CRI 90 available upon request.
- LED Driver included.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 9204 | 9205 |
|----------------------|------------------------------|------------------------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 2,1 |
| System Power (W) | 2,2 | 2,2 |
| Lumen Source (lm) | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 |
| CCT (K) | 3000 | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,24 | 0,24 |

GALLIS
LIGHTING

www.gallis.gr



Starlight Surface

01
03
26

- Indoor wall / ceiling surface mounted LED spotlight.
- Base made of metal sheet. Body made of machined aluminium to optimize heat dissipation.
- Brass fixing joint included that allows setting the orientation of the spot.
- No visible cables, as they are running through the joint.
- Nichia LED mounted on metal core PCB (MCPCB) 2700K, 3000K, 4000K.
- CRI 90 upon request.
- Non dimmable driver included in the base of the luminaire.
- Luminaire life time > 50,000 hours at 70% luminous flux. Tiltable: 90°.

| CODE | 9014 |
|----------------------|------------------------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Source Power (W) | 2,1 |
| System Power (W) | 2,2 |
| Lumen Source (lm) | 280 |
| Lumen Luminaire (lm) | 224 |
| CCT (K) | 3000 |
| Beams | 14°, 28°, 44° & 14° + 48° |
| CRI | ≥ 80 |
| Weight (kg) | 0,38 |





Vodafone ,Greece



Ceiling and Suspended 05

pages 126 - 141




Asterion Double LED


01 03 26

- Surface mounted adjustable LED downlight.
- Tilttable +/-15deg.
- Luminaire made of steel-sheet and spots made of aluminium, powder coated.
- Luminaire heat sink made of extruded aluminium.
- Based on Bridgelux V13 CoB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat management.
- CRI 90 upon request.
- Alunova® LED reflector.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver included.

| CODE | 9180 | 9181 |
|----------------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 35 | 50,6 |
| System Power (W) | 36,8 | 53,1 |
| Lumen Source (lm) | 5316/5528 | 7200/7488 |
| Lumen Luminaire (lm) | 4252/4422 | 5760/5990 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 16°, 24°, 41° | 16°, 24°, 41° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 4,27 | 4,27 |

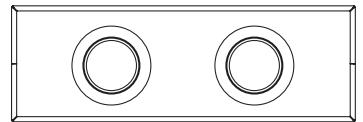

130

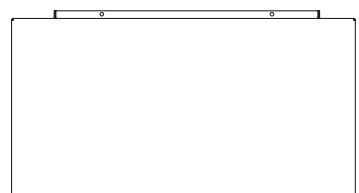

200

350



Mini Asterion Double LED



01 03 26

- Surface mounted adjustable LED downlight.
- Tiltable +/-15deg.
- Luminaire made of steel-sheet and spots made of aluminium, powder coated.
- Luminaire heat sink made of extruded aluminium.
- Based on Bridgelux V10 CoB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat management.
- CRI 90 upon request.
- Alunova® LED reflector.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver included.

| CODE | 9182 | 9183 |
|----------------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 17,4 | 25,2 |
| System Power (W) | 18,3 | 26,5 |
| Lumen Source (lm) | 2646/2726 | 3622/3730 |
| Lumen Luminaire (lm) | 2116/2182 | 2898/2984 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 16°, 24°, 41° | 16°, 24°, 41° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 3,46 | 3,46 |

GALLIS
LIGHITING

www.gallis.gr

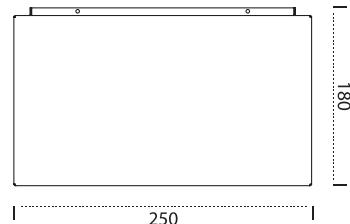


Orion LED

01 03 26

- Surface mounted LED downlight.
- Luminaire made of steel-sheet and spots made of aluminium, powder coated.
- Luminaire heat sink made of extruded aluminium.
- Based on Bridgelux V10 CoB LED.
- Highly efficient passive cooling system with large surface on top of luminaire for heat management.
- CRI 90 upon request.
- Reflector made of aluminium coated PC with protective lacquer.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- LED driver included.

| CODE | 2170 | 2171 |
|----------------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 2 x 8,7 | 2 x 12,6 |
| System Power (W) | 2 x 9,1 | 2 x 13,2 |
| Lumen Source (lm) | 2646/2726 | 3622/3730 |
| Lumen Luminaire (lm) | 2116/2182 | 2898/2984 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 13°, 28°, 48° | 13°, 28°, 48° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 2,58 | 2,58 |


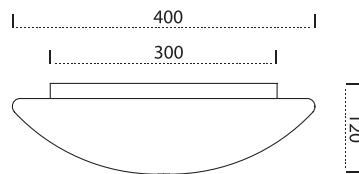


Jesolo LED

(01)

- Surface mounted luminaire.
- Base made in steel sheet.
- Triplex opal satin glass diffuser.
- Equipped with osram PrevaLED module with integrated driver.
- Warm White 3000K or Neutral White 4000K.
- Colour rendering index ≥ 85 .
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 6076 |
|----------------------|-------------|
| Frequency (Hz) | 50/60 |
| Main Voltage (V) | 220-240 |
| Source Power (W) | 21 |
| System Power (W) | 22 |
| Lumen Source (lm) | 2300/2500 |
| Lumen Luminaire (lm) | 1840/2000 |
| CCT (K) | 3000/4000 |
| CRI | ≥ 80 |
| Diameter (mm) | 400 |
| Weight (kg) | 2,4 |




Tholos Ceiling

01 03 26

- Indoor and outdoor ceiling LED.
- Luminaire core made of high quality diecast aluminium.
- Luminaire outer case made of steel sheet.
- Electrostatic polyester powder coated.
- Polycarbonate textured diffuser screen and silicone ring.
- Uses Samsung LEDs. Driven at max 700mA .
- CRI 90 upon request
- LED driver included.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 6230C | 6231C |
|----------------------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 16 | 25 |
| System Power (W) | 16,8 | 26,3 |
| Lumen Source (lm) | 2056/2139 | 3063/3185 |
| Lumen Luminaire (lm) | 1645/1711 | 2450/2548 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 90° | 90° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (Kg) | 1 | 1 |



Rode

01

- Indoor ceiling surface mounted LED luminaire.
- Body made of die cast aluminium. Polyester powder coated white.
- Clear protection glass.
- Based on Bridgelux V13.
- Non dimmable Tridonic LED driver included.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 9184 | 9184 |
|----------------------|----------------|----------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Power (W) | 17,5 | 25,3 |
| Lumen Source (lm) | 2658/2674 | 3600/3744 |
| Lumen Luminaire (lm) | 2126/2211 | 2880/2995 |
| CCT (K) | 2700/3000/4000 | 2700/3000/4000 |
| Beams | 50° | 50° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 1,0 | 1,0 |



WINE
SPIRIT
PASSION


OAK

PARKER





CEILING AND SUSPENDED

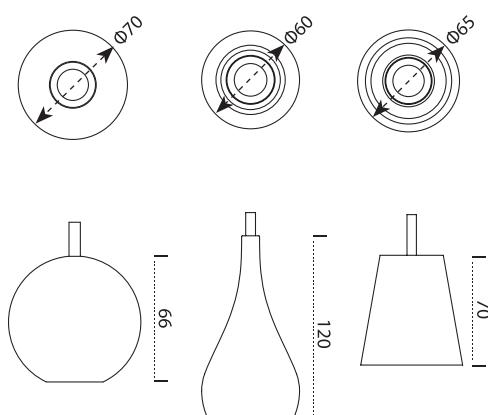

Starlight Pendant


01 03 26 22

- Indoor LED pendant luminaire.
- Full luminaire made of machined aluminium to optimize heat dissipation.
- Anodized finish satin chrome.
- Nichia LED mounted on metal core PCB (MCPBC) 2700K, 3000K, 4000K.
- CRI 90 upon request.
- Provided with 1,20 meters of transparent cable and ceiling base.
- LED driver included in ceiling base.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 3600 CONE | 3601 DROP | 3602 SPHERE |
|----------------------|---------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 2,1 | 2,1 |
| System Power (W) | 2,2 | 2,2 | 2,2 |
| Lumen Source (lm) | 280 | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 | 224 |
| CCT (K) | 3000 | 3000 | 3000 |
| Beams | 14°, 28°, 44° | 14°, 28°, 44° | 14°, 28°, 44° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 1,4 | 1,4 | 1,4 |

 **GALLIS**
LIGHTING

www.gallis.gr

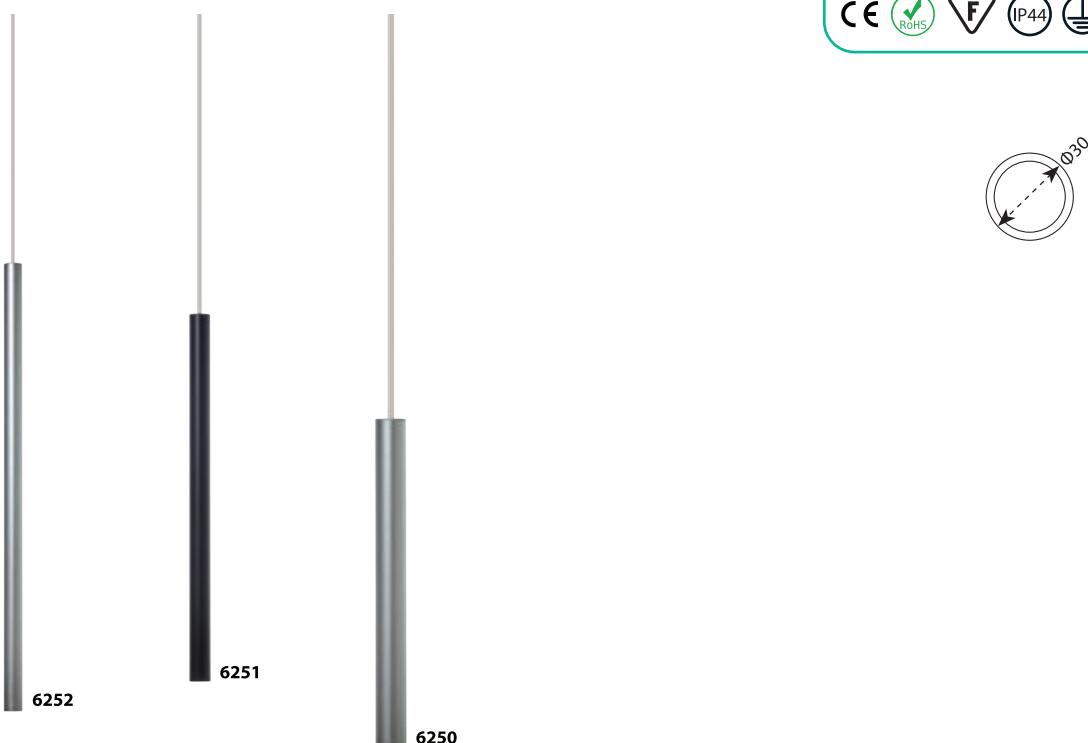

Stick


22 03

- Indoor pendant accent LED luminaire.
- Body and front ring made of machined aluminium to optimize heat dissipation.
- Nichia LED mounted on metal core PCB (MCPCB) 2700K, 3000K, 4000K.
- CRI 90 upon request. - LED driver included.
- Luminaire life time > 50,000 hours at 70% luminous flux.
- Colours: Anodized aluminium or anodized black.

| CODE | 6250 | 6251 | 6252 |
|----------------------|---------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 2,1 | 2,1 | 2,1 |
| System Power (W) | 2,2 | 2,2 | 2,2 |
| Lumen Source (lm) | 280 | 280 | 280 |
| Lumen Luminaire (lm) | 224 | 224 | 224 |
| CCT (K) | 3000 | 3000 | 3000 |
| Beams | 14°, 28°, 48° | 14°, 28°, 48° | 14°, 28°, 48° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Height (mm) | 300 | 500 | 700 |
| Weight (kg) | 0,41 | 0,51 | 0,65 |



CEILING AND SUSPENDED

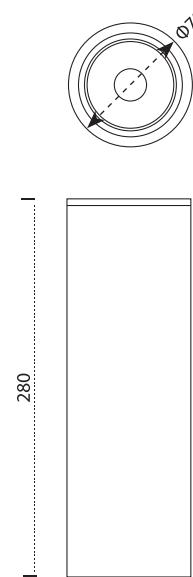

Cylinder LED 7C / 7S

01 03 26

- Indoor ceiling surface mounted and pendant LED luminaire.
- Luminaire housing and heatsink made from extruded aluminium.
- Diecast aluminium end caps. Galvanised metal internal elements.
- Clear glued protection glass.
- Reflector made of aluminium. Body powder coated. Polycarbonate protective cover.
- Based on Bridgelux V10.
- CRI 90 upon request.
- Phase cut dimmable LED driver (made in Europe) included as standard, other drivers / dimming possibilities available on request.

| CODE | 1113C | 1113S |
|----------------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 |
| Source Power (W) | 12,6 | 12,6 |
| System Power (W) | 13,2 | 13,2 |
| Lumen Source (lm) | 1811/1865 | 1811/1865 |
| Lumen Luminaire (lm) | 1449/1492 | 1449/1492 |
| CCT (K) | 3000/4000 | 3000/4000 |
| Beams | 13°, 28°, 48° | 13°, 28°, 48° |
| CRI | ≥ 80 | ≥ 80 |
| Weight (kg) | 1,1 | 1,1 |

GALLIS
LIGHTING



www.gallis.gr



9171S



9171C




Cylinder Asterion LED

01 03 26

- Ceiling mounted or suspended interior light fixture.
- Body made of aluminium, powder painted, with clear protection glass.
- Led Bridgelux V13.
- CRI 90 upon request.
- Alunova LED reflector.
- Passive cooling (no moving parts).
- LED driver included .
- Luminaire lifetime > 50,000 hours at 70% luminous flux.

| CODE | 9171C 9171S | 9172C 9172S | 9173C 9173S | 9175C 9175S | 9176C 9176S | 9177C 9177S |
|----------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 17,5 | 17,5 | 17,5 | 25,3 | 25,3 | 25,3 |
| System Power (W) | 18,4 | 18,4 | 18,4 | 26,6 | 26,6 | 26,6 |
| Lumen Source (lm) | 2658/2764 | 2658/2764 | 2658/2764 | 3600/3744 | 3600/3744 | 3600/3744 |
| Lumen Luminaire (lm) | 2126/2211 | 2126/2211 | 2126/2211 | 2880/2995 | 2880/2995 | 2880/2995 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 16° | 24° | 41° | 16° | 24° | 41° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 3,2 | 3,2 | 3,2 | 3,2 | 3,2 | 3,2 |



Tholos High Bay LED

01 03

- Indoor and outdoor ceiling pendant LED high bay.
- Full luminaire made of high quality die-cast aluminium.
- Electrostatic polyester powder coated.
- Clear polycarbonate textured diffused screen and silicone ring.
- Galvanized steel springs.
- Equipped with SAMSUNG LEDs.
- CRI 90 upon request.
- LED driver included.
- Luminaire life time > 50,000 hours at 70% luminous flux.

| CODE | 6230HB | 6231HB | 6232HB |
|----------------------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Source Power (W) | 16 | 25 | 33 |
| System Power (W) | 16,8 | 26,3 | 34,7 |
| Lumen Source (lm) | 2056/2139 | 3063/3185 | 4086/4250 |
| Lumen Luminaire (lm) | 1645/1711 | 2450/2548 | 3269/3400 |
| CCT (K) | 3000/4000 | 3000/4000 | 3000/4000 |
| Beams | 90° | 90° | 90° |
| CRI | ≥ 80 | ≥ 80 | ≥ 80 |
| Weight (kg) | 0,95 | 0,95 | 0,95 |



Cylinder 7C &7S



01 03 26

- Indoor ceiling mounted and pendant luminaire for GU10 or E27 type lamps.
- High quality extruded aluminium profile, 3mm thick.
- Electrostatic polyester powder coated.
- Ceiling mounted and suspended.



| CODE | 1110/C | 1111/C | 1112/C | 1114/S | 1115/S | 1117/S |
|------------------|---------|---------|-----------|---------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| Lamp type | GU10 | GU10 | E27 PAR20 | GU10 | E27 PAR20 | E27 PAR20 |
| Height (mm) | 90 | 110 | 130 | 300 | 400 | 600 |
| Weight (Kg) | 0,26 | 0,26 | 0,34 | 1 | 1,3 | 2 |



CEILING AND SUSPENDED



1120-1131/C



1641

Cylinder 12C / 16C

01 03 26

CYLINDER 12C

- Indoor ceiling mounted luminaire for AR111, G53 base or Par30, E27 base LED lamps.
- Body made of extruded aluminium electrostatically polyester powder coated.
- AR111, G53 base includes a non dimmable 20W 12VDC LED driver to cover all needs of 12V G53 base LED lamps.
- Par30, E27 version does not include any driver.

CYLINDER 16C

- Indoor ceiling adjustable luminaire for AR111, G53 base LED lamps.
- Body made of extruded aluminium, electrostatic polyester powder coated.
- AR111, G53 base includes a non dimmable 20W 12VDC LED driver to cover all needs of 12V G53 base LED lamps.

| CODE | 1120/C | 1131/C | 1641 |
|------------------|-----------|-----------|-----------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Lamp Type | E27 PAR30 | AR111 G53 | AR111 G53 |
| Weight (Kg) | 0,61 | 0,61 | 0,61 |

GALLIS
LIGHTING

www.gallis.it

CEILING AND SUSPENDED





1322/S



1320/C



1324/W





Tetragon 7C / 7S

01 03 26

- Indoor ceiling mounted or pendant luminaire for GU10 type lamps.
- High quality extruded aluminium profile, 3mm thick.
- Electrostatic polyester powder coated.

| CODE | 1320/C | 1322/C | 1322/S | 1324/W |
|------------------|---------------|---------------|---------------|---------------|
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 | 220-240 |
| Lamp Type | GU10 | GU10 | GU10 | GU10 |
| Height (mm) | 80 | 300 | 300 | 80 |
| Weight (Kg) | 0,28 | 0,91 | 0,91 | 0,91 |

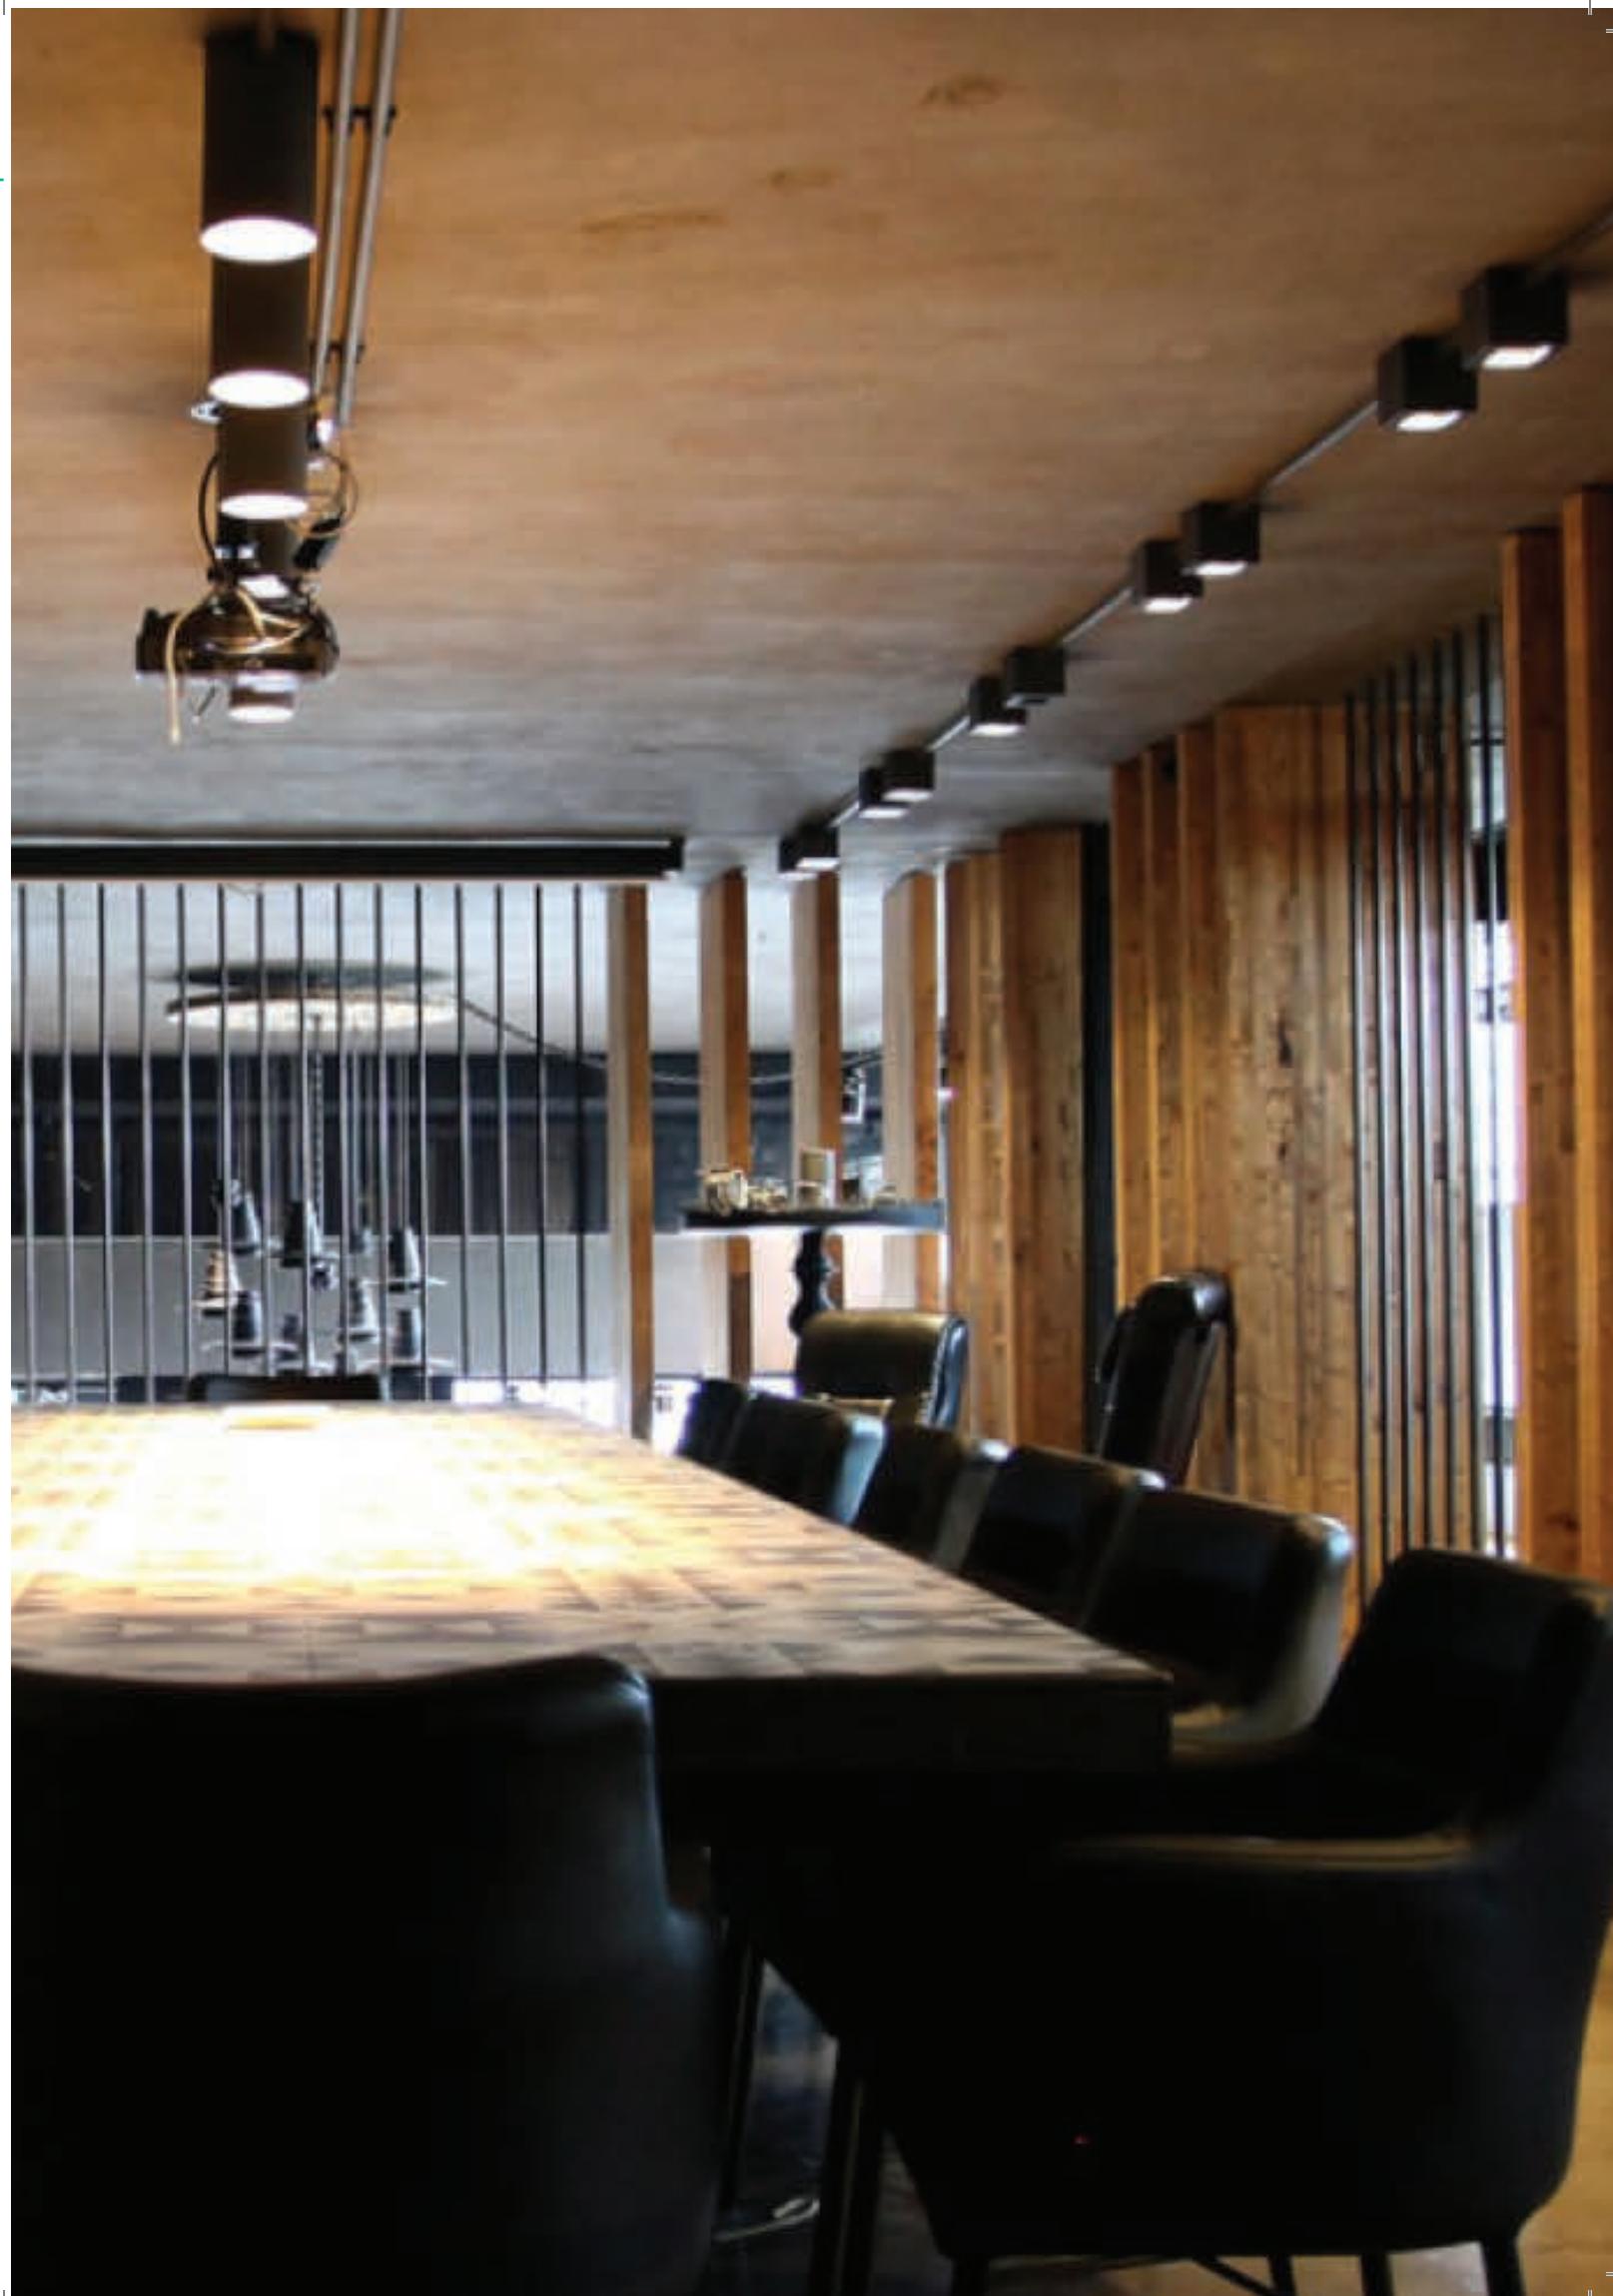

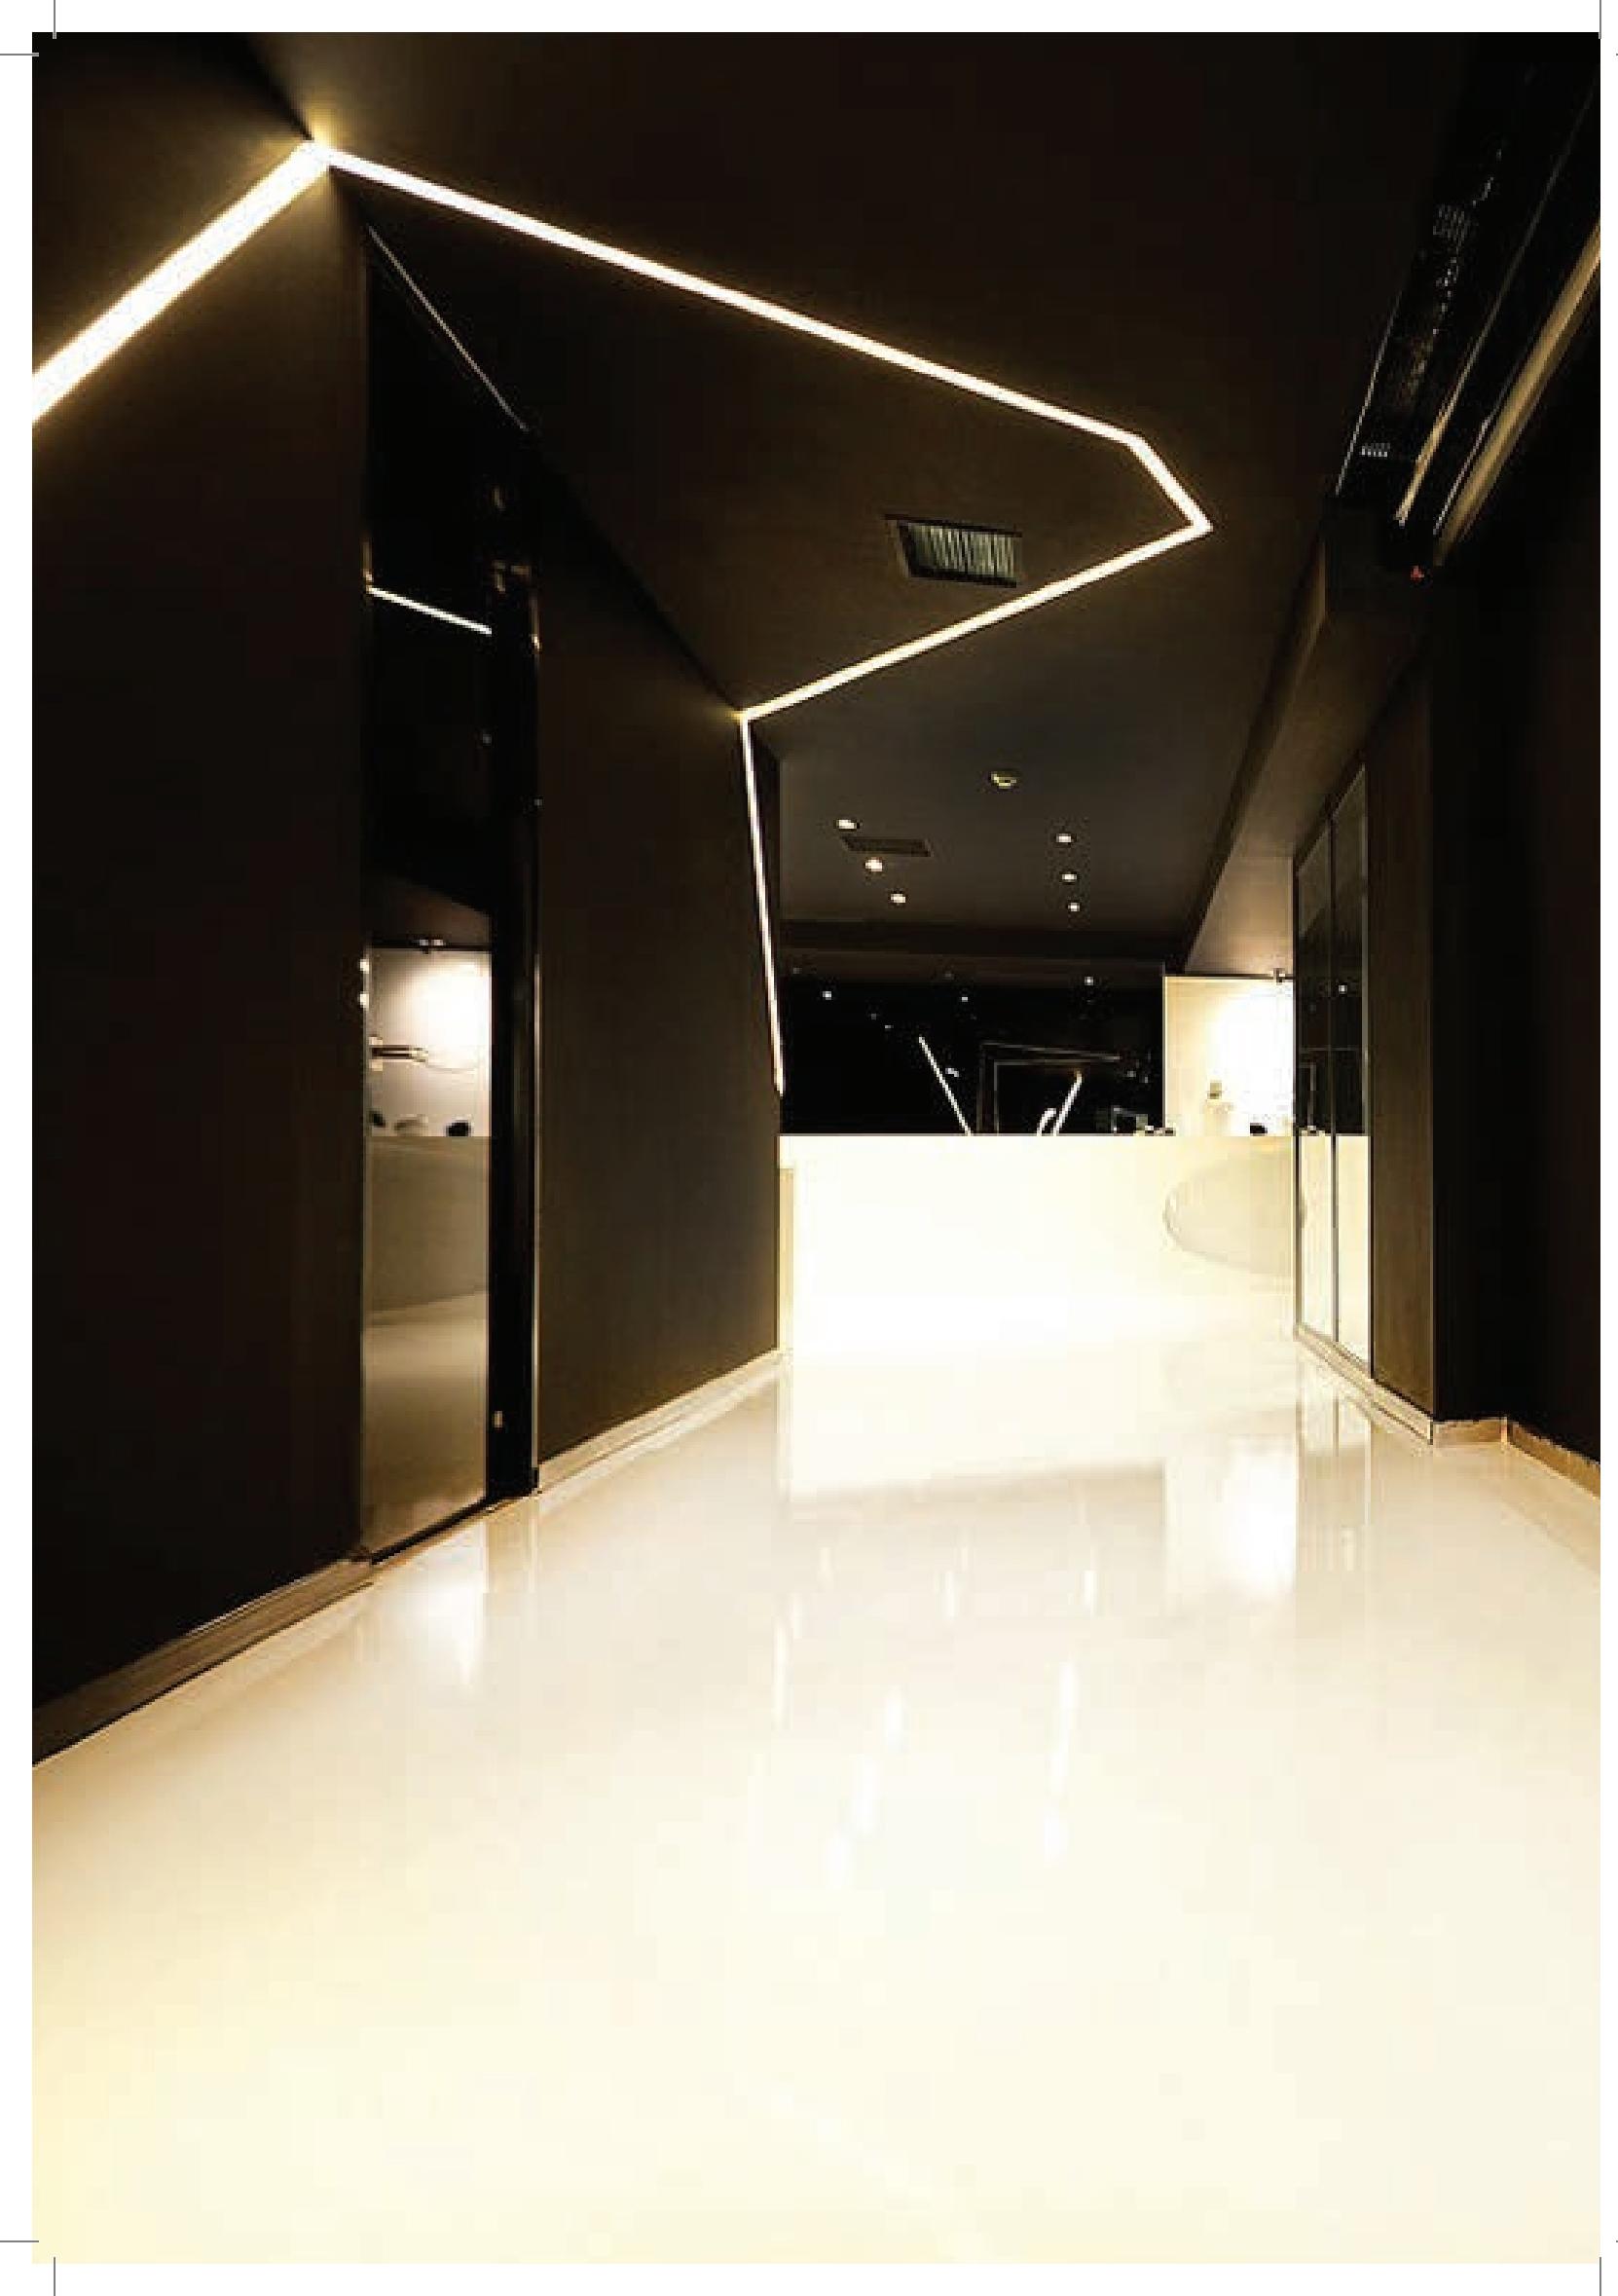

LED Tape 06

pages 144 - 145





LED Tape

- High efficiency flexible LED tape.
- Easy integration - installation with various aluminium profiles (MICROLINE).
- Available in extra warm white (2700K), warm white(3000K) and cold white (4000K).
- Dimmable (depending on driver) via phase cut, 1-10V, Dali. Suitable for Constant Voltage 24V drivers.
- Can be cut every 100mm with pre soldered cutting points. Max run length 5000mm.
- Product Warranty 5 years or 50.000h.
- SMD 2835 LED's, ONE BIN ONLY, 3-STEP MacAdam (No colour difference between LED's).
- LED driver to be ordered separately.
- IP versions upon request.

| CODE | 7820G/W | 7830G/W |
|---------------------------------|----------------|-----------------|
| Nominal Voltage (VDC) | 24 | 24 |
| Rated wattage (W) | 24 | 72 |
| Nominal wattage per meter (W/m) | 4,8 | 14,4 |
| Luminous flux per meter (lm/m) | 500 | 1200 |
| Luminous flux (lm) | 2500 | 6000 |
| Luminous efficacy (lm/W) | 104 | 84 |
| CRI | ≥ 80 | ≥ 80 |
| Beam angle (°) | 120 | 120 |
| Number of LEDs per meter | 60 | 60 |
| Diamensions LxWxH (mm) | 5000 x 8 x 1,5 | 5000 x 10 x 1,5 |

| CODE | 89030/GALLIS | 89100/GALLIS | 89150/GALLIS |
|--------------------|--------------|--------------|--------------|
| Type | CV driver | CV driver | CV driver |
| Frequency (Hz) | 50/60 | 50/60 | 50/60 |
| Main Voltage (V) | 220-240 | 220-240 | 220-240 |
| Max Power (W) | 30 | 100 | 150 |
| Output Voltage (V) | 24 | 24 | 24 |
| IP | 67 | 67 | 20 |

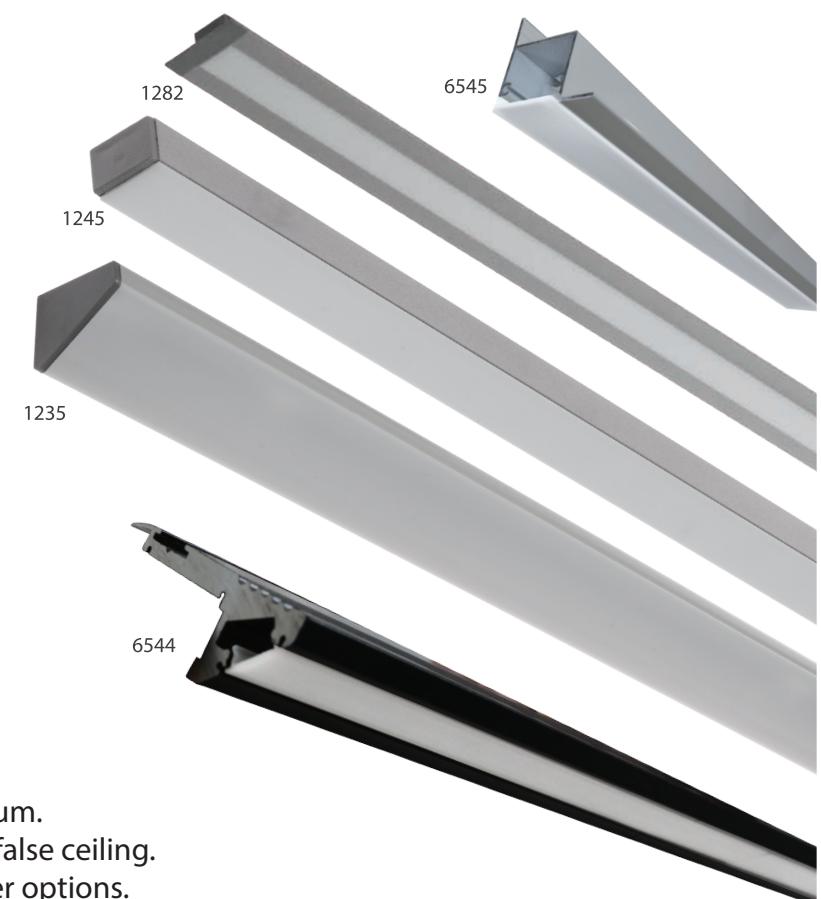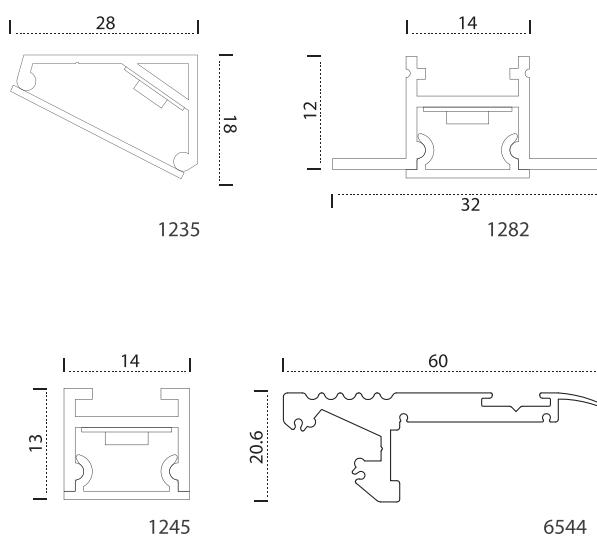

Microline

- Profile made of extruded aluminium.
- Surface mounted or recessed for false ceiling.
- Opal or transparent acrylic diffuser options.
- Supplied in 1 m.

CODE ACCESSORIES PROFILE


| | |
|------------|-----------------------------|
| 1245 OP/TR | Microline Square |
| 1235 OP/TR | Microline Triangular |
| 1282 OP/TR | Microline Recessed |
| 6544 OP/TR | Microline Step |
| 6545 OP/TR | Microline Edge |
| 6549 | Microline Ceiling |
| 6550 | Microline Wall |
| 1200 | Square Linear Connector |
| 1201 | Triangular Linear Connector |



Finish


| |
|---|
| Powder coated white, black or metallic grey |
| Powder coated white, black or metallic grey |
| Powder coated white, black or metallic grey |
| Anodized black or metallic natural grey |
| Powder coated white, black or metallic grey |

OP: OPAL DIFFUSER

TR: TRANSPARENT ACRYLIC DIFFUSER

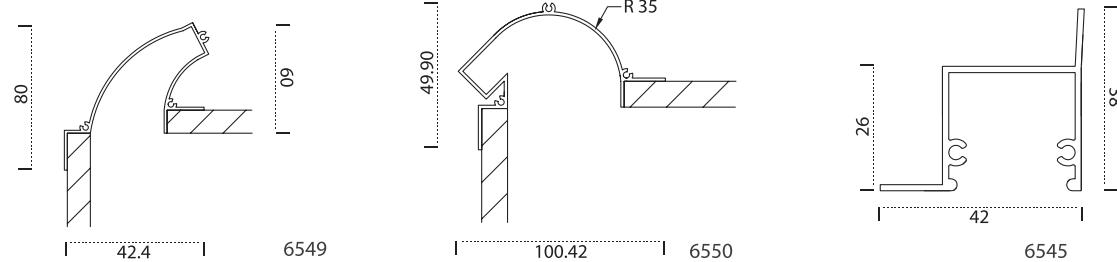

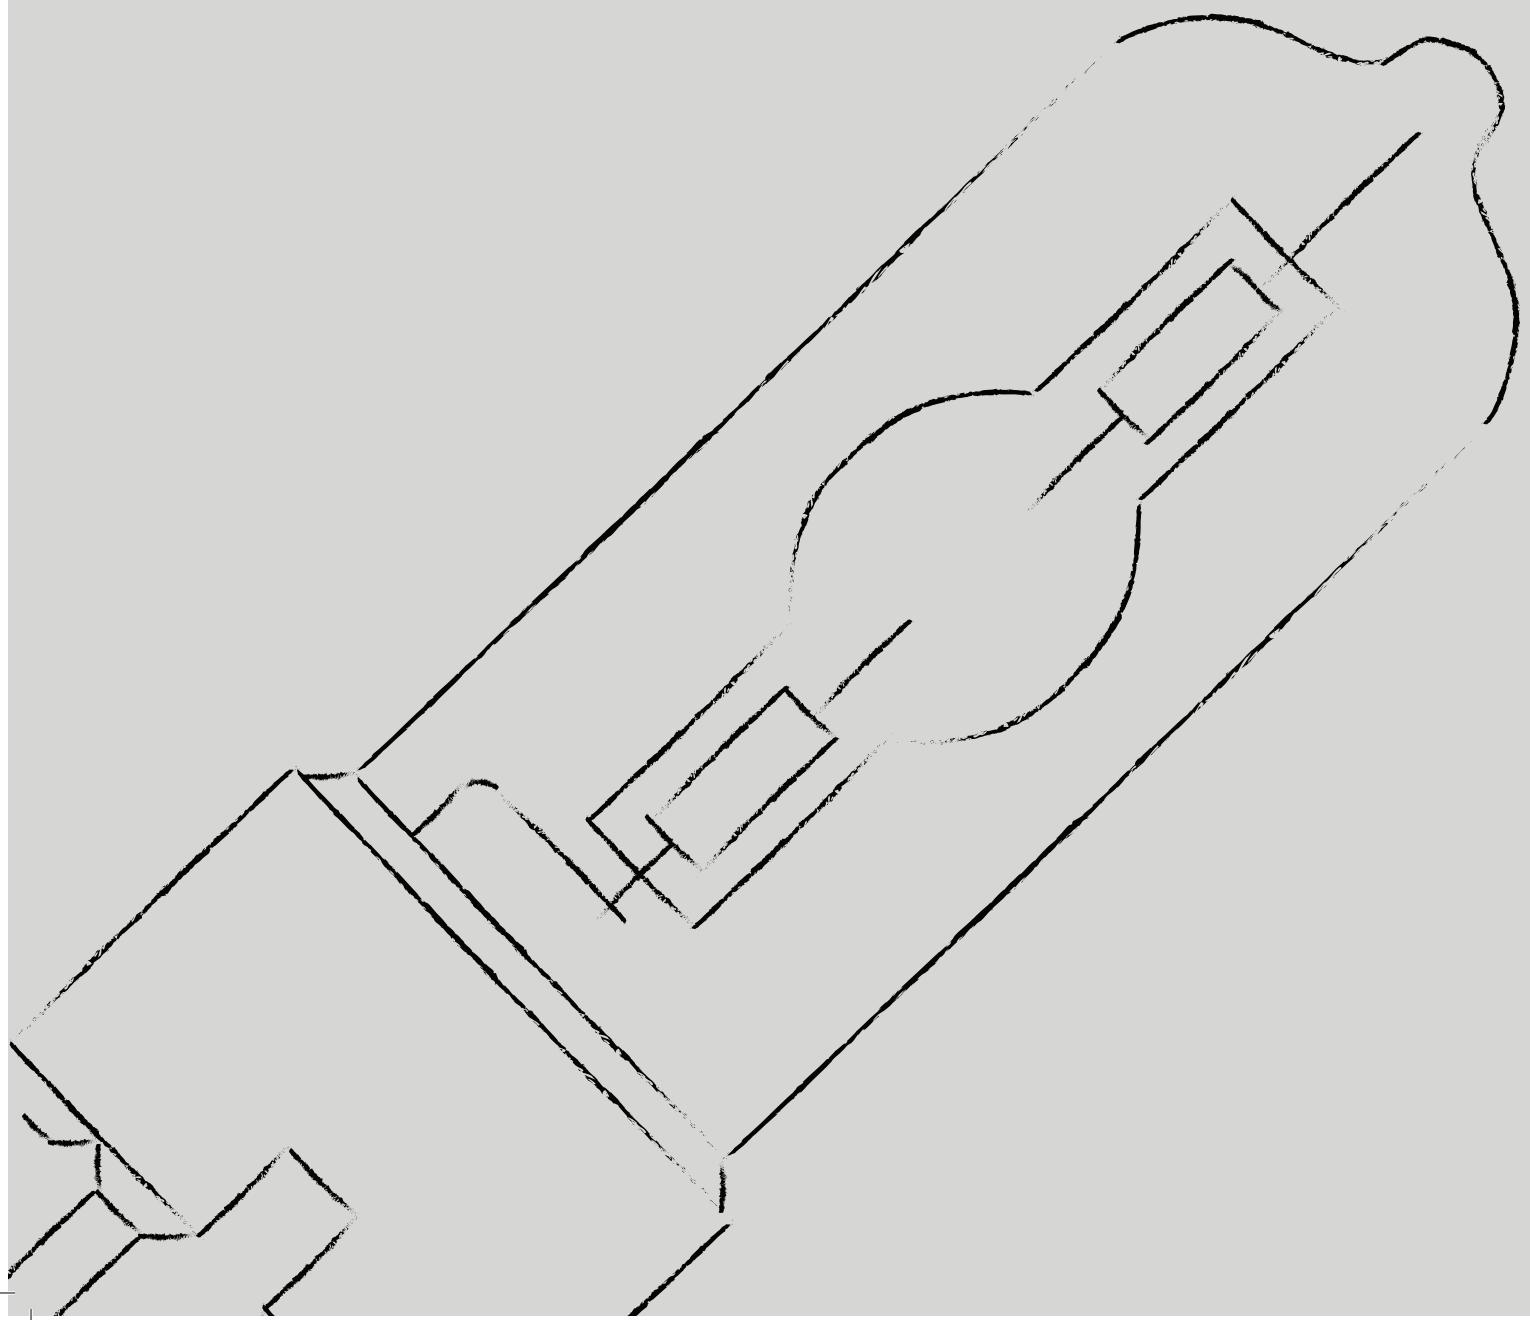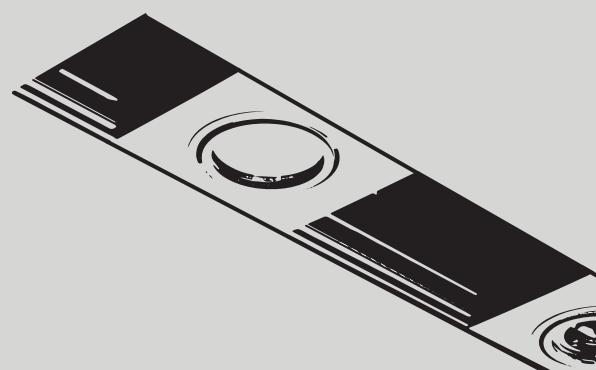


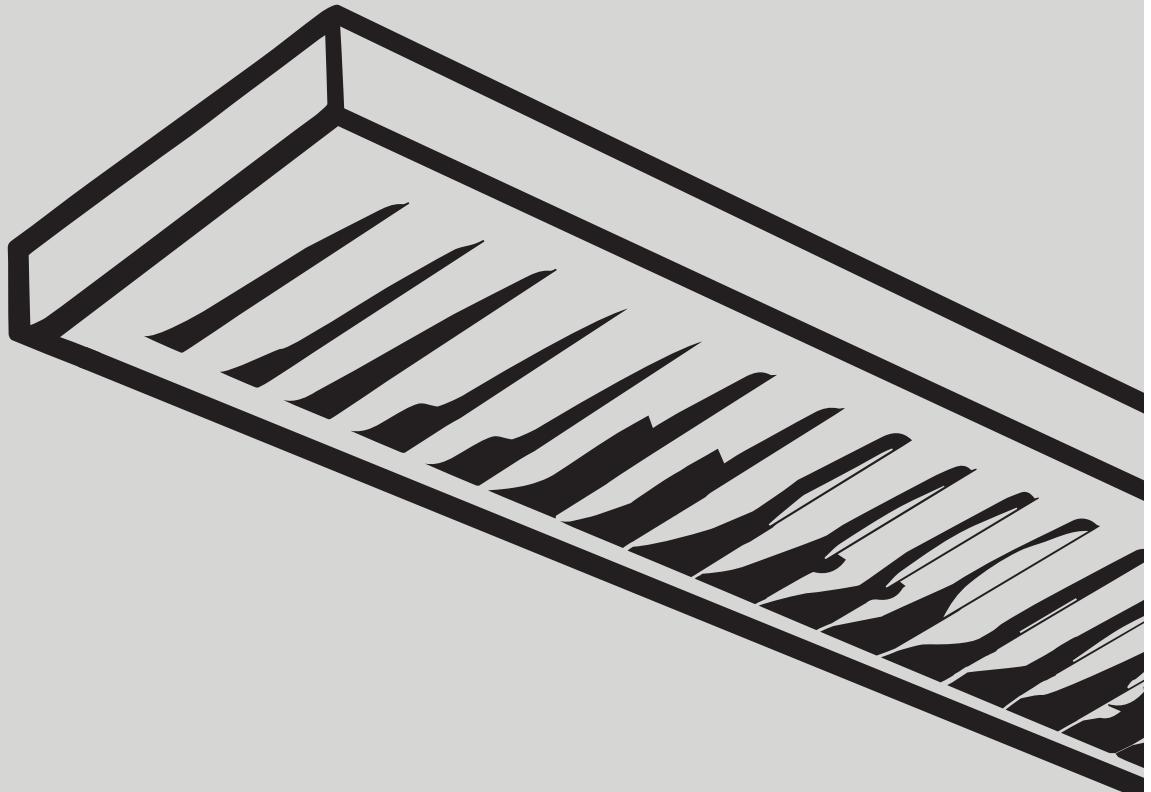


Fluorescent & Metal Halide

With over 40 years of experience in lighting we have mastered our craft of lighting production with **fluorescent, compact fluorescent and metal halide** technologies. As a highly experienced lighting manufacturer we have hundreds of product designs made for the "old" technologies.

If your project requires such solutions please contact us as we might already have what you are looking for.

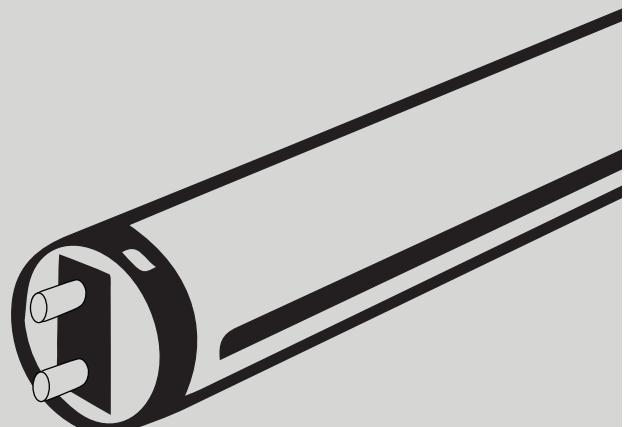

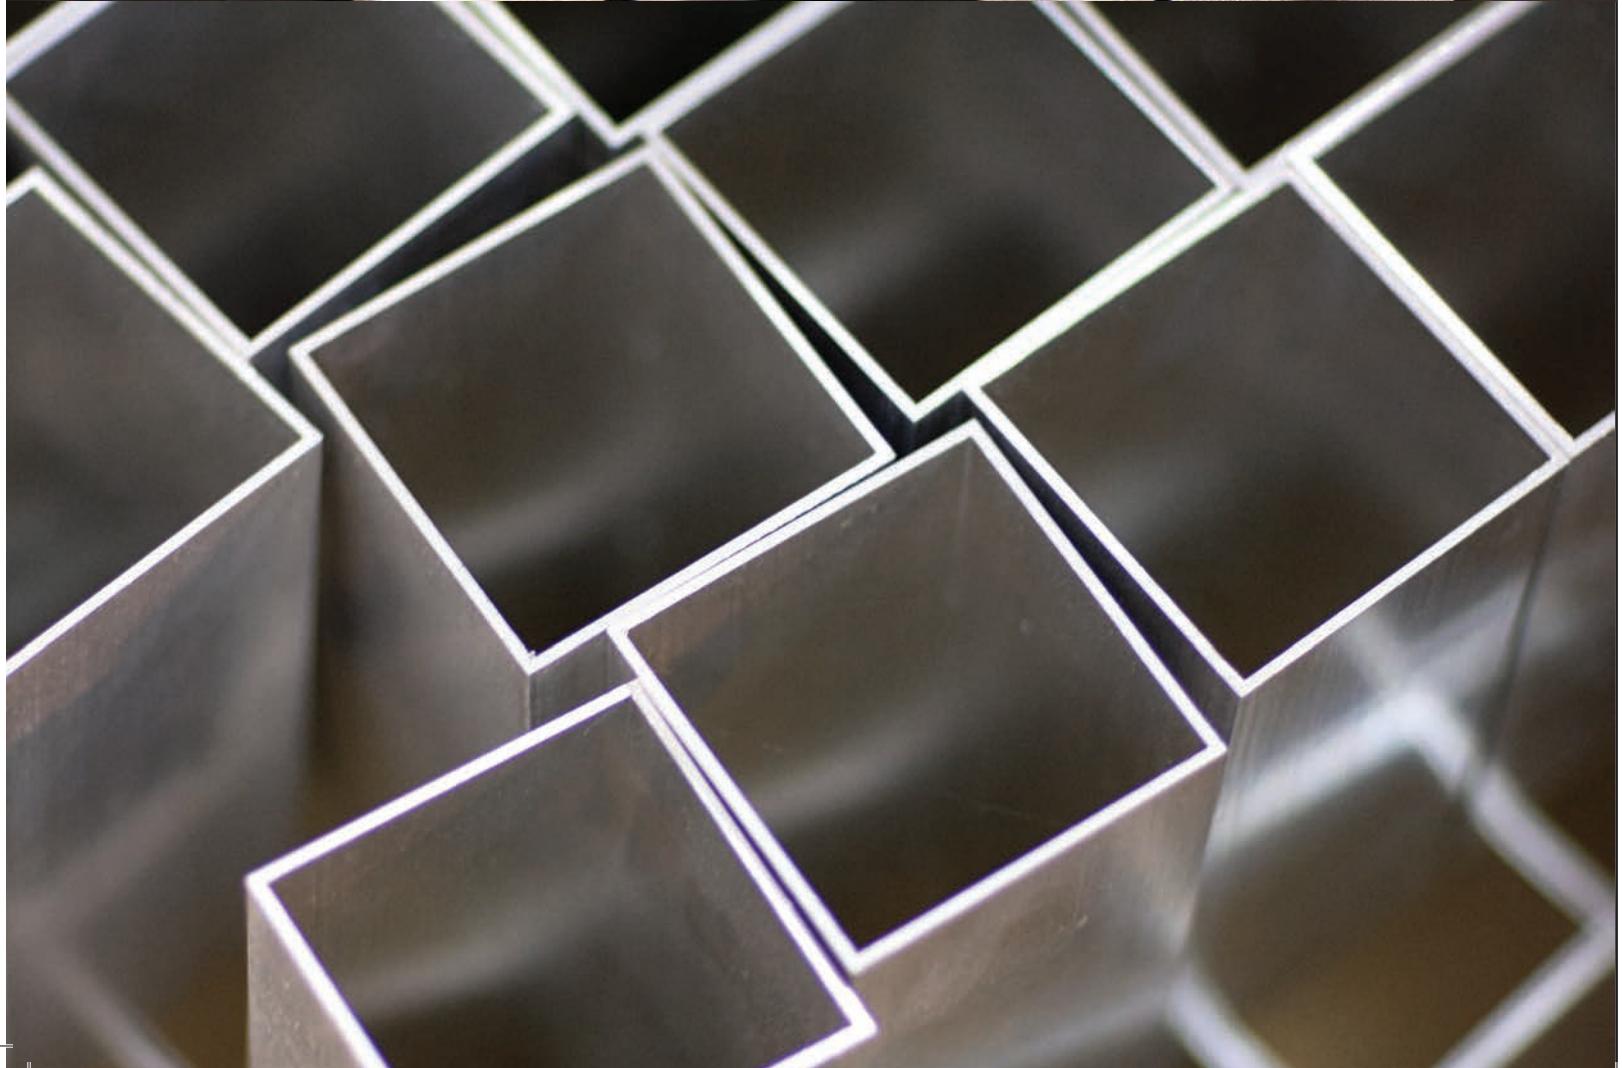

Accessories

pages 150 - 152

08



Eurostandard Track

- 3-Circuit Main Voltage Track in extruded aluminium. Main Voltage 220-240V.
- Electrical Wiring is located in an Extruded PVC insulated housing.

| CODE | Dimensions (mm) | Weight (kg) |
|------|-----------------|-------------|
| 2284 | 33 x 1000 x 33 | 0,77 |
| 2283 | 33 x 2000 x 33 | 1,54 |
| 2282 | 33 x 3000 x 33 | 2,36 |

| CODE FOR RECESSED | Dimensions (mm) | C/O Dimensions (mm) | Weight (kg) |
|-------------------|-----------------|---------------------|-------------|
| 2094/1 | 58 x 1000 x 33 | 33 x 1000 x 33 | 0,86 |
| 2094/2 | 58 x 2000 x 33 | 33 x 2000 x 33 | 1,72 |
| 2094/3 | 58 x 3000 x 33 | 33 x 3000 x 33 | 2,58 |

| ACCESSORIES CODE | |
|------------------|---|
| 2095 | Right Feeder for Power for Surface track |
| 2097 | Concealed Connector (electrical) |
| 2103 | Flexible Corner Connector |
| 2241 | Right Feeder for Power for Recessed track |
| 2104 | End Cap |
| 2269 | Eurostandard Adaptor |
| 4047 | Suspension cable with Power supply. |
| 4048 | Suspension cable without Power supply. |



Suspensions



4047
8828
4248
4046

Suspension Cable
with Power Supply
Cord




4048
8829
4249

Suspension Cable
without Power
Supply Cord



4540
4055
1225
1028
4503



4503



1200

Linear connectors



4502



4332

L-Shape



3054



3053



3052



BR1



BR2

Bracket

Linealum
C



Ceiling-wall

ACCESSORIES

Plate



4500



2570



2571



2580



2563



2564



2565

Spike



CO.011



CO.018

IP68 Connection

CO.001
CO.002

CO.003




CO.004

Filters

- 0030
- 0031
- 0032
- 0033

Morfear



Sirius

- 0016
- 0017
- 0018
- 0019

0027
Linear Beam0057
Corrective Filter 6200K0056
Red Color Exalt Filter0058
Green Color Exalt Filter

Anti-glare

CO.014
CO.015

Anti-glare snoot


CO.016
CO.017
Anti-glare
honeycomb


Tree strap for Forever



CO.100



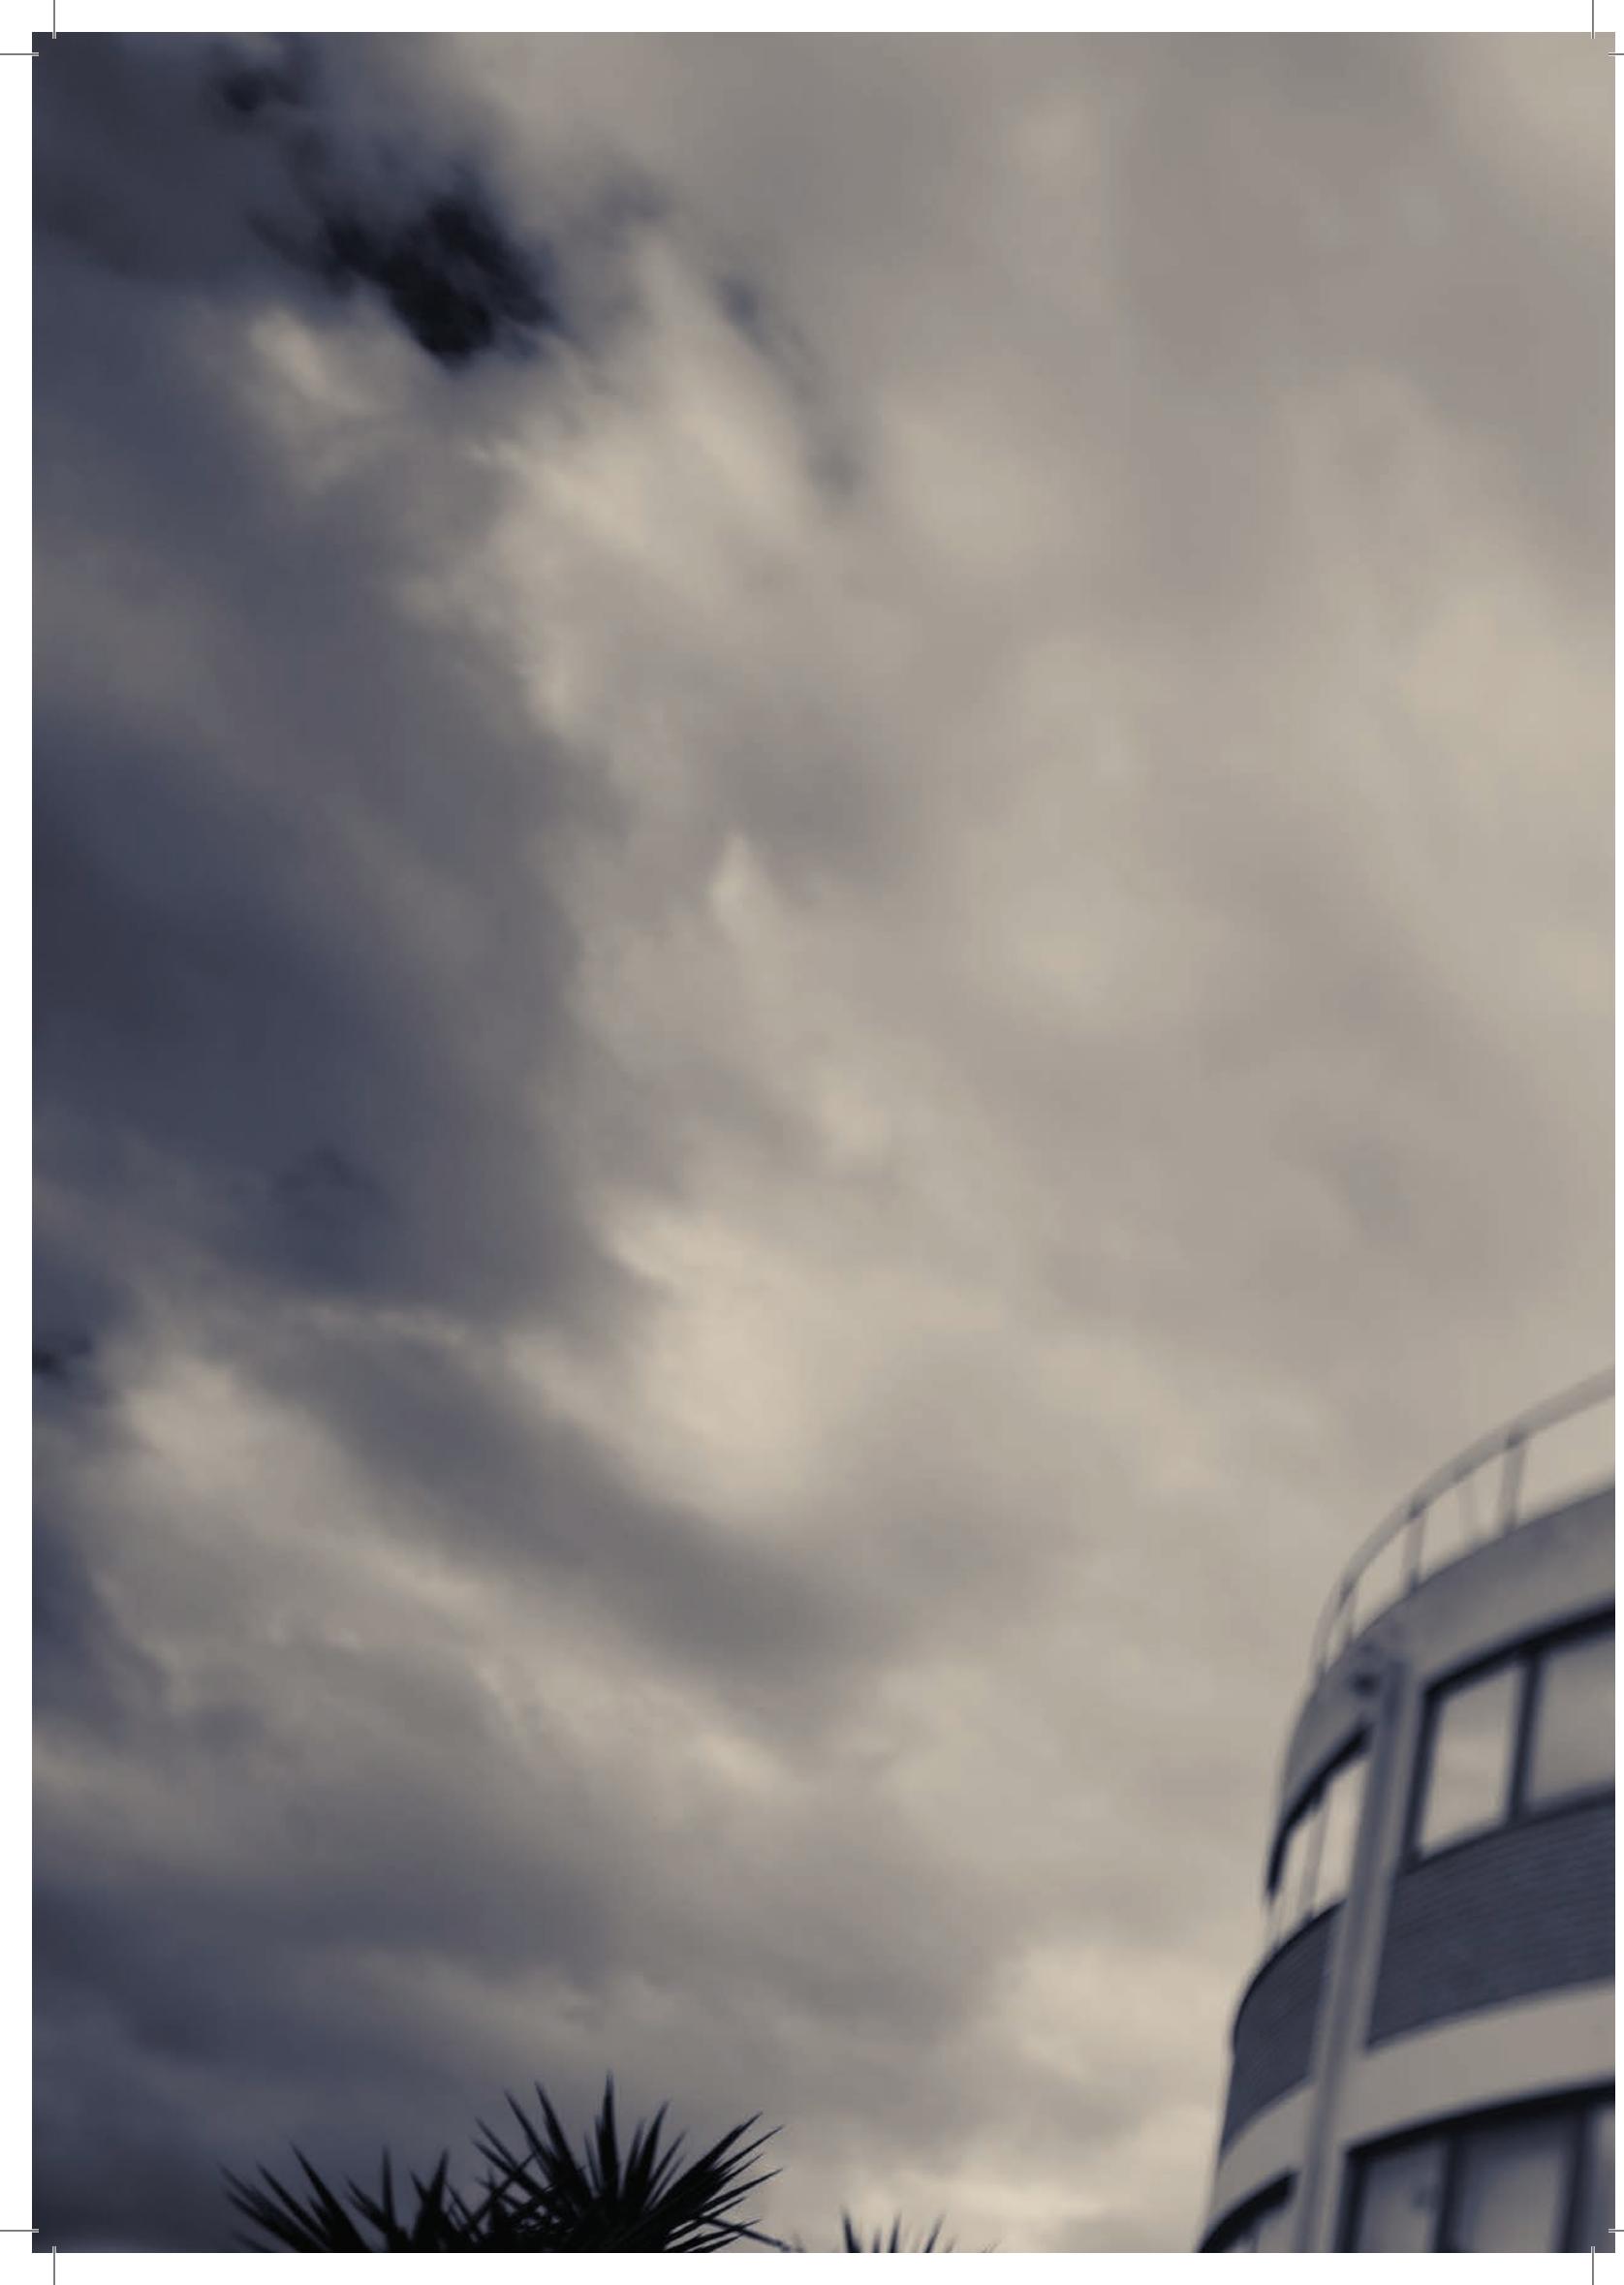

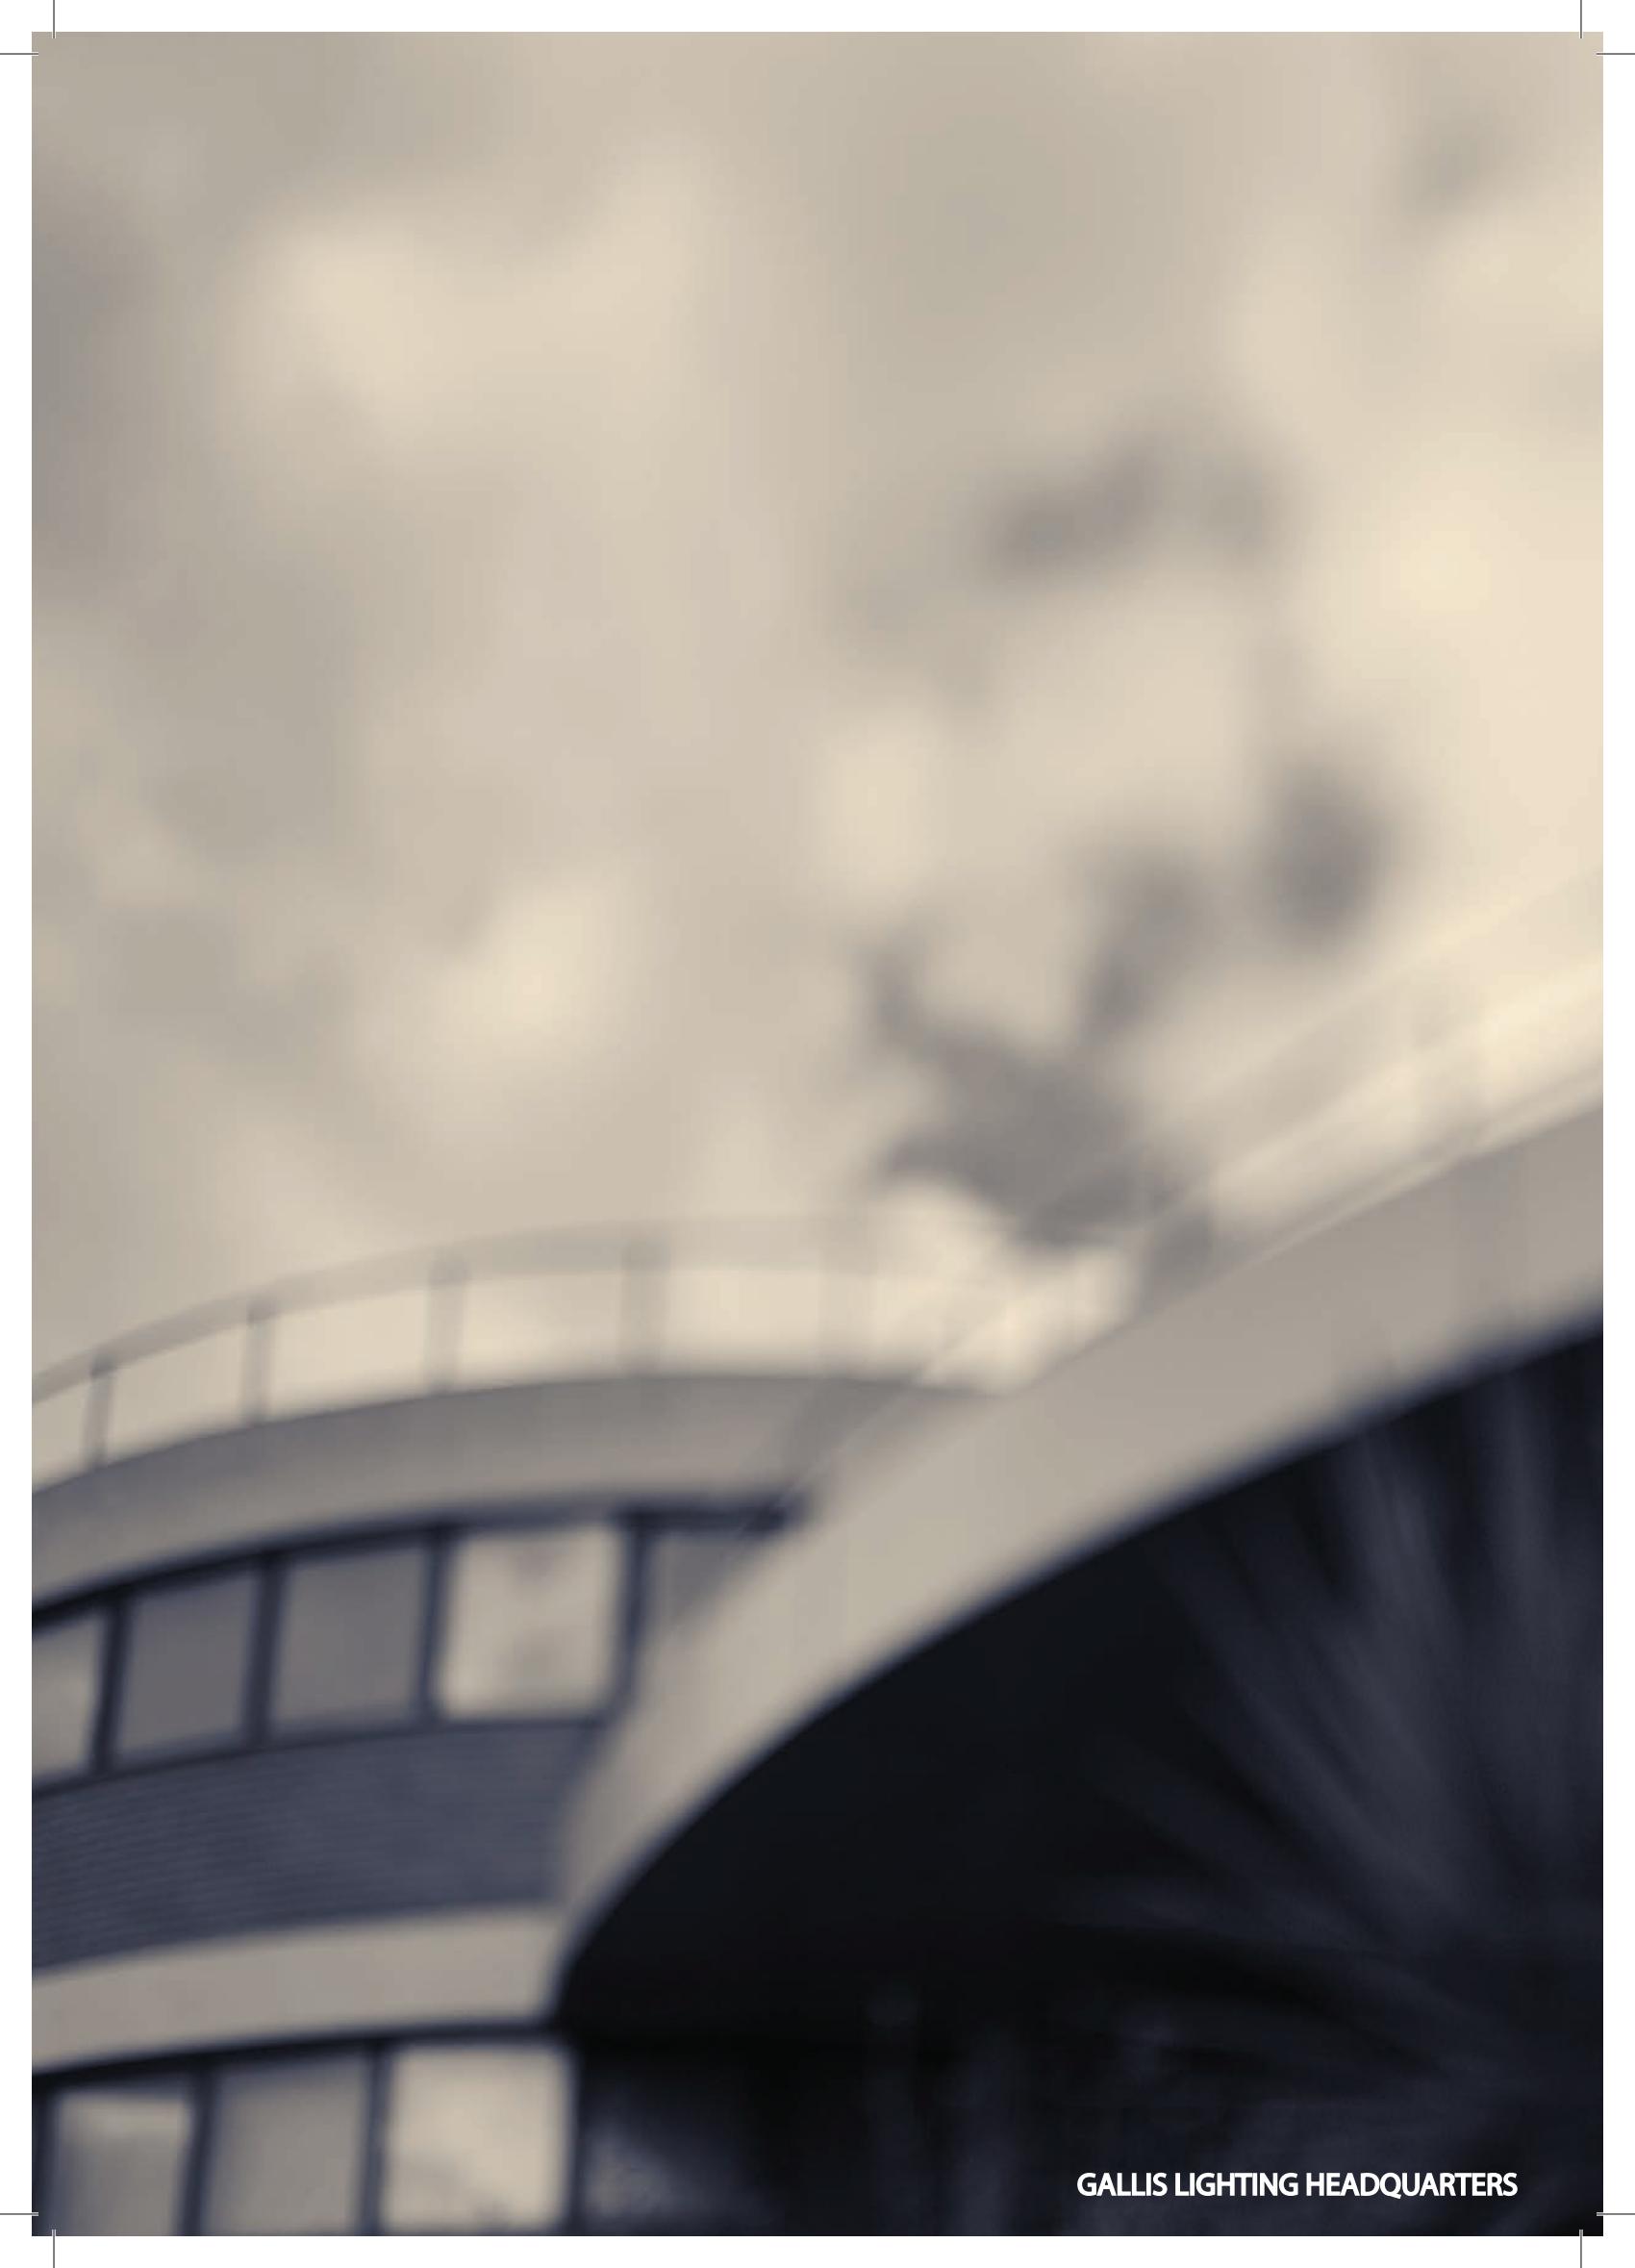A blurred, abstract photograph of a modern building's exterior. The image shows a series of large, rectangular windows on the left side of a building, which has a light-colored, possibly white or cream, facade. To the right, there is a dark, angular structure, possibly a canopy or a set of stairs, with some vertical lines suggesting steps or railings. The overall effect is one of motion blur or a low-quality camera shot.

GALLIS LIGHTING HEADQUARTERS

**HEADQUARTERS
& SHOWROOM**

3 LEFKADOS & ARTIS STR.
183 46 MOSHATO
ATHENS-GREECE
T: +30 210 4831711
+30 210 4831512
F: +30 210 4832859
E-MAIL: gallis@gallis.gr

FACTORY
SCHIMATARI, VOIOTIA

GLYFADA

27 LAZARAKI STR.
166 75 GLYFADA
ATHENS-GREECE
T: +30 210 8942301
+30 210 8942305
F: +30 210 4832859
EMAIL: glyfada@gallis.gr

HEAD OFFICE EXPORTS

3 LEFKADOS & ARTIS STR.
183 46 MOSHATO
ATHENS-GREECE
T: +30 210 4831512
F: +30 210 4832589
EMAIL: export@gallis.gr
export@gallis.eu